

SOLUM EL027F5C4C Newton Electronic Shelf Labels



SOLUM EL027F5C4C Newton Electronic Shelf Labels Instruction Manual

[Home](#) » [SOLUM](#) » SOLUM EL027F5C4C Newton Electronic Shelf Labels Instruction Manual 

Contents

- 1 SOLUM EL027F5C4C Newton Electronic Shelf Labels
- 2 General Description
- 3 Specification
- 4 Product Handling Precautions
- 5 Battery Handling Guide
 - 5.1 Avoiding hazards in lithium battery handling
- 6 FCC
- 7 Documents / Resources
 - 7.1 References



SOLUM EL027F5C4C Newton Electronic Shelf Labels



General Description

SOLUM NEWTON Electronic Shelf Labels (ESLs) are components to a total SOLUM's ESL System. The SOLUM's ESL System consists of the ESLs, Gateway(s), Server, and optional accessories (such as the Newton Remote Controller) and is used to electronically display key information such as price and product information, that are traditionally printed or written on paper in environments like supermarkets, warehouses, and factories. SOLUM's Newton ESLs are the industry-leading solutions that provide the longest battery life (up to 13 years), fastest update speed, built-in LEDs, built-in buttons, IP67 rating for rough environments, multiple pages per ESL, and more to take the operation beyond just displaying information on the ESLs. Newton ESLs come in various sizes and colours to meet all customer use cases. They are battery-powered for ease of deployment and wirelessly receive updates from SOLUM Gateway for.





Specification

This section details the specification of each ESL by size. ESLs are identified by the diagonal measurement of the display in inches. For example, a 2.7" ESL is referring to an ESL with a diagonal display dimension of 2.7".

Product Specification

Item	Description
Label Dimensions	2.7" : 75.64 x 49.51 x 11.62 mm / 2.97 x 1.95 x 0.45 inch
Display Dimensions	2.7" : 57.27 x 38.18 mm / 2.25 x 1.50 inch
Display Resolution	2.7" : 300 x 200 pixel (133dpi)

Item	Description
Label Weight	2.7" : 38.4gr / 1.35oz
Viewing Angle	Nearly 180°
Display Colors	  BWRY (black, white, red, yellow) ** Color options are not available for all sizes. See Section 3. XX for a full list of options.
Battery	Type and quantity of batteries defer based on ESL CR2450 Lithium Battery – 2pcs : 2.7"
Wireless Communication	2.4 GHz Unlicensed ISM band SOLUM proprietary protocol FeliCa NFC Forum Type 3 (13.56MHz) NFC Passive Only
Communication Distance	147 feet (45m) radius Line of Sight
Security	128-bit AES Encryption
Compliance	FCC, IC, CE, TELEC, RoHS

Operating Temperature	Nominal ESLs BWR: 32F ~ 104F (0C ~ 40C) @45~70% RH BWY: 32F ~ 86F (0C ~ 30C) @ 45~70% RH BWRY: 32F ~ 104F (0C ~ 40C) @45~70% RH Freezer ESLs BW: -13F ~ 31F (-25C ~ 0C) *freezer ESL must be used in freezer environments
Storage Temperature	32F ~ 104F (0C ~ 40C) @45~70% RH


Radio (RF) Specification

Item	Parameter	Specification			Unit	Condition
		Min	Typ	Max		
Tx	Tx Power	–	4	–	dBm	
	[Carrier Frequency Offset and Drift]	-75	0	75	kHz	
	Tx Current		–	10	mA	total current at max Tx Power
Rx	Receiver Sensitivity	-85	–	–	dBm	PER < 5%

NFC Specification

Item	Parameter	Specification			Unit	Condition
		Min	Typ	Max		
NFC	Read Distance	–	0.7	–	in	
		–	20	–	mm	

NFC antenna location shown for each ESL size.

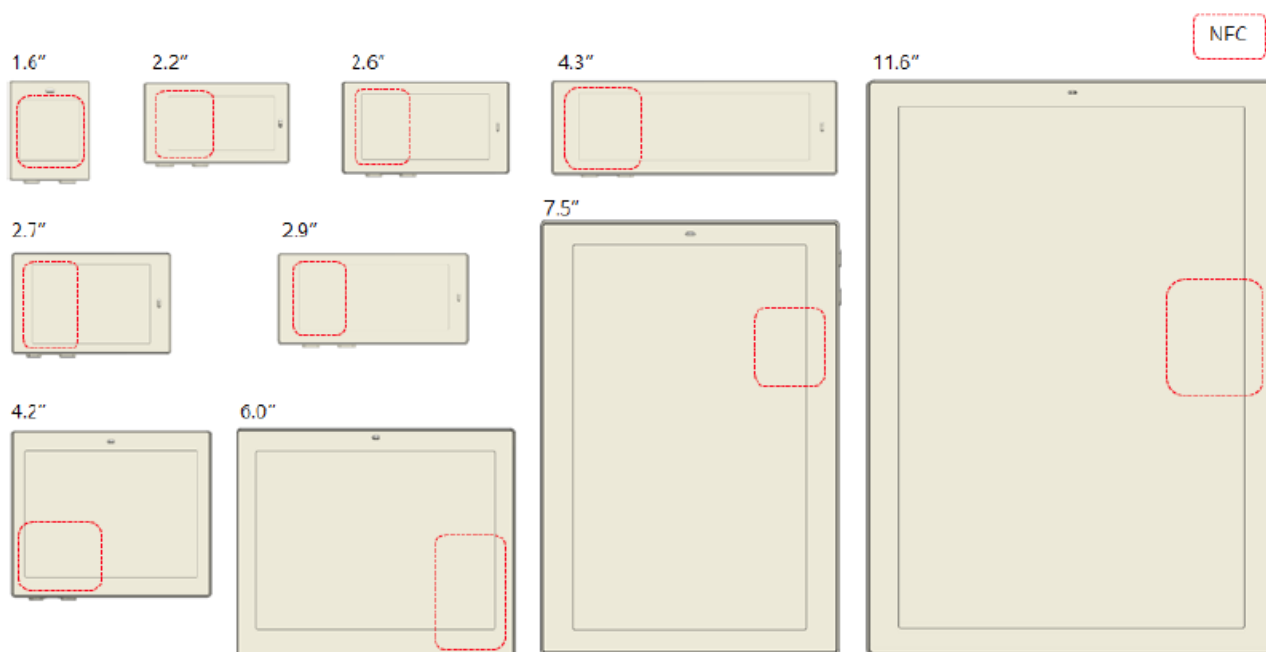

Product Handling Precautions

Provisions should be made to protect against any damage to the product caused by improper handling. The purchaser assumes any responsibility for damage to the product caused by improper handling. Product should be stored in 32F ~ 104F (0C ~ 40C) @45~70% RH environment and should be installed within 90 days of receipt.

Usage Environment

Take extra caution when using this RF device in the vicinity of other electronic devices and appliances. Most electronic devices and appliances use electromagnetic waves. Electromagnetic waves emitted by this RF device can affect other electronic devices and appliances. If using the device in an explosion hazard area, follow all safety

regulations, instructions, and signals.

Storage and Use

- Moisture and liquids can damage internal parts and circuit boards if allowed to enter into the device itself.
- Do not place or store the product on a sloped surface. The product may slide and fall off the surface and become damaged.
- Use the product in temperatures ranges of 0°C~40°C/32~104°F(BWR), 0°C~30°C/32~86°F (BWY), 0°C~40°C/32~104°F(BWRY) or -25°C~0°C/-13~32°F(Freezer). Parts and circuits may be damaged if operated or stored in extreme temperature.
- The display panel needs extra care during handling.
 - Do not apply any impacts on the e-paper display as it is fragile.
 - Continuous exposure to excessive moisture (over 70% RH) or UV shortens display lifetime.
 - Ghosting images may appear in temperature conditions of less than 15°C/59°F for normal tags and -25°C/ -13°F for freezer tags. (If $\Delta L^* > 2$, we call it ghosting phenomenon)
- Avoid areas with strong magnetism or subject to magnetism. Contact between the device and a magnetic object can lead to malfunctions.
- Do not place the product near heat-producing kitchen appliances like a stove or a microwave or in the vicinity of highly pressurized containers.
- External impact to the product, such as from being dropped, can damage the product. Twisting and bending the product can damage the exterior casing and the internal components. If this product operates abnormally while removing battery or replacing battery, it needs to be discharged by contacting the battery terminals (+) and (-) in the product.
- This product uses the 2.4GHz frequency band for the wireless communication network. Radio communications can be limited or affected by other applications that share the same frequency band, such as WiFi, Bluetooth, Zigbee, etc.
- A prior investigation into the radio environment is strongly required for efficient and smooth installation.
- Frequent communications, updates and screen renewals may reduce battery lifetime.
- Low-temperature environments may reduce battery life.
- FIFO (First In First Out)

Product Cleaning

For Spray Cleaning:

Steps

1. Lightly spray all surfaces and wait a few seconds.
2. Gently wipe clean using a cloth or tissue.
3. Let the labels dry.

Notes:

1. Use mild, non-alcoholic detergents or glass cleaner.
2. Recommend non-abrasive cloths: Microfiber, Cotton T-shirt, Cotton handkerchief, Cotton tea towel

For Wet Tissue Cleaning:

Steps

1. Stand or lay down the labels.
2. Wipe using wet tissues.
3. Let the labels dry.



Battery Replacement

Audience

- Authorized personnel with the following knowledge are allowed to replace the battery: Battery / Electronic assemblies (e.g. circuit board) / Compliance with the instruction

Note: Warranty is voided if battery is replaced by unauthorized personnel. (When batteries require replacement, please contact the authorized personnel)

Instructions

- Risk of short circuit if the battery is incorrectly installed/stored.
- Check that hands are dry before and at all times during the replacement process.
- Keep batteries away from children and infants.
- Do not heat, charge, bend, drop, short-circuit and/or disassemble battery.
- Do not mix together used and new batteries or different battery types.

Note: Battery rarely has minor stains or leaks.

Battery Directional

- **Top:** (+) Positive
- **Bottom:** (-) Negative

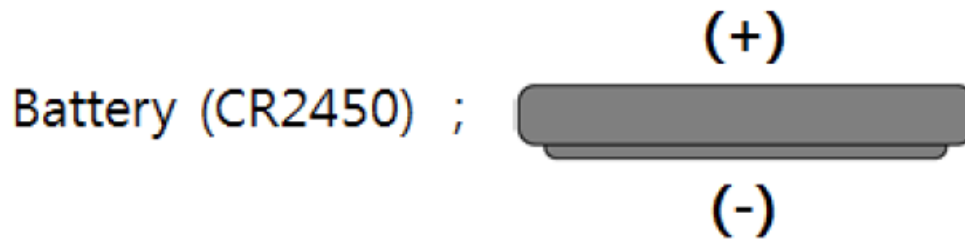


Figure 15. Battery Directional

Battery Handling Guide

Avoiding hazards in lithium battery handling

Do not short circuit (Fig. 1)


- Direct connection of plus (+) and minus (-) poles may result in leakage, heat generation, explosion and/or fire.
- Do not store and/or carry batteries with metallic items, such as a necklace.

Do not stack and/or jumble batteries (Fig. 2)

- Stacked and/or jumbled batteries may cause a short circuit and/or forced discharge from contact with other batteries.
- This may result in leakage, heat generation, explosion and/or fire.

Do not make forced discharge batteries (Fig. 3)

- On a forced discharge by an external power source, the battery voltage goes to negative and this causes gas generation in inside of the battery.
- This may result in leakage, heat generation, explosion and/or fire.

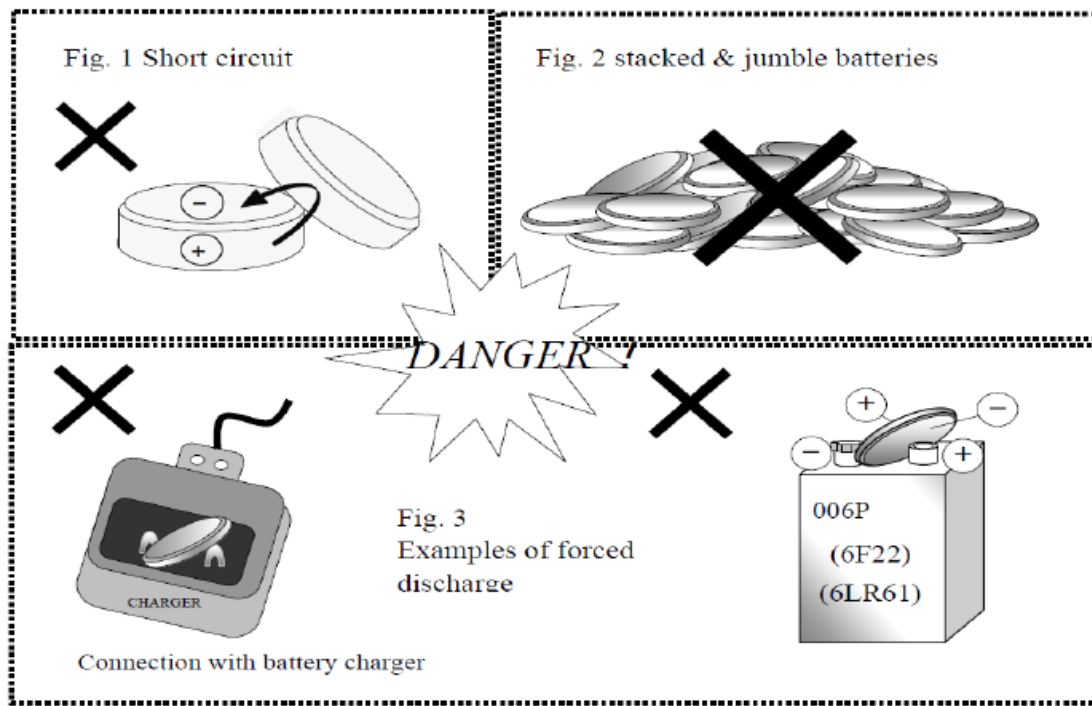

Do not dispose of batteries in fire

- Disposal of batteries in fire is extremely dangerous with a risk of explosion and violent flaring.

Do not heat batteries

- Heating batteries above 100°C/212°F may damage the resin in crimping, separator and other parts, potentially causing an electrolyte leak, internal short circuit, fire and/or explosion.

Do not solder directly onto batteries

- Direct soldering onto batteries may damage the resin in crimping, separator and other parts, potentially causing an electrolyte leak, internal short circuit, fire and/or explosion.

Do not recharge batteries

- Recharging of batteries may result in internal gas generation, causing electrolyte leak, battery swelling, fire and explosion.

Do not disassemble batteries

- Disassembly of batteries may generate gas that may irritate your throat.
- Lithium may also react with moisture to generate heat and fire.

Do not deform batteries

- Applying extreme pressure to batteries may cause deformation of the crimping and internal short circuit, causing electrolyte leak, battery swelling, fire and explosion.

Do not mix different type of batteries











- For some applications, mixing different types of batteries or new and old batteries can cause an overdischarge due to differences in voltage and discharge capacities. . This may lead to the risk of swelling and/or explosion.

Do not insert batteries with opposite polarity


- For some applications, battery insertion with opposite polarity (reverse insertion of plus and minus) may result in leakage, heat generation, explosion and/or fire.
- Please ensure the above precautions are strictly observed by related divisions including production, warehouse, product technology, sales, quality, customer stores, S/I companies, part-time workers, and external service companies.

Proper Storing and Disposing of Lithium Batteries

- To minimize risk of fire and explosion of batteries, be sure to follow the instructions below.

NG	Do not stack batteries	Do not stack batteries in a vinyl bags	Do not Short circuit	Do not make forced discharge batteries	
					
OK	Using battery tray → Tape sealing	Tape attachment to "+/- electrodes			
					

- Proper use of battery tray is outlined below. With batteries properly placed into each tray slot → stack the trays in the same orientation → use an empty tray on the top stack → tape the stack together to avoid falling apart.

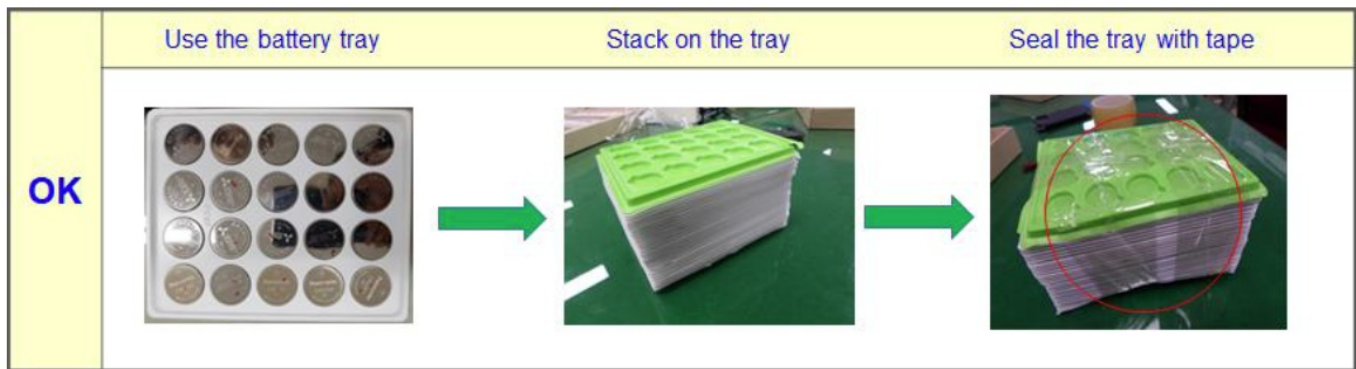

- Follow local regulations for proper battery disposal guidelines.

FCC

FCC Information to User

This equipment has been tested and found to comply with the limits for a Class A digital device, under part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used under the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Caution

THE GRANTEE IS NOT RESPONSIBLE FOR ANY CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT. IMPORTANT

NOTE: FCC RF Radiation Exposure Statement This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimetres between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation of the device. Devices displaying their FCC identified, warning statements, or other information electronically must permit access to the information without requiring special codes, accessories or permissions and access to this information must not require more than three steps from the device setting menu. The number of steps does not include those steps for use of screen locks, passcodes or similar security protection designed to control overall device access.

ISED

ISED Information to User This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:


1. This device may not cause interference; and (2) This device must accept any interference,

CE

We hereby declare under our sole responsibility that the electrical product above complies with the essential requirements of the Radio Equipment Directive (2014/53/EU) by application of

- EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013
 - EN 62479:2010
 - EN 301 489-1 V2.2.0
 - EN 301 489-17 V3.2.0
 - EN 300 328 V2.2.2 and the Directive (2011/65/EU) on the restriction of the use of certain hazardous substances in electrical and electronic equipment by application of EN 62321 Series. REV 1.1 SOLUM Traceability
 - SOLUM CO., LTD
 - A-Tower 6th Floor, 357 Guseong-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea, 16914
-

Documents / Resources

	<p>SOLUM EL027F5C4C Newton Electronic Shelf Labels [pdf] Instruction Manual EL027F5C4C Newton Electronic Shelf Labels, EL027F5C4C, Newton Electronic Shelf Labels, E lectronic Shelf Labels, Shelf Labels</p>
--	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.