



## SONOFF S26 WiFi Smart Plug User Manual

[Home](#) » [SonOFF](#) » SONOFF S26 WiFi Smart Plug User Manual 

### Contents

- [1 SONOFF S26 WiFi Smart Plug](#)
- [2 Product Information](#)
- [3 Specifications](#)
- [4 Product Usage Instructions](#)
- [5 Operating Instruction](#)
- [6 Power on](#)
  - [6.1 Add the device](#)
- [7 Compatible Pairing Mode](#)
- [8 Specifications](#)
- [9 Product Introduction](#)
- [10 Wi-Fi LED indicator status instruction](#)
- [11 Features](#)
- [12 Switch Network](#)
- [13 Factory Reset](#)
- [14 Documents / Resources](#)



**SONOFF S26 WiFi Smart Plug**



## **Product Information**

### **Wi-Fi Smart Plug**

The Wi-Fi Smart Plug is a device manufactured by SONOFF TECHNOLOGIES CO., LTD. The device is compatible with Android and iOS operating systems and allows users to remotely turn on/off devices, schedule them, share control, and control devices together. The device has a Wi-Fi LED indicator (blue), an On/Off LED indicator (red), and a pairing button/manual switch. It has a maximum load input of 250V~ and supports IEEE 802.11 b/g/n 2.4GHz Wi-Fi frequency. The product dimensions are 97.5x56x35mm.

### **Specifications**

Model	Input	Max. Load	Operating Systems
S26R2TPF/S26R2TPG/S26R2TPI/S26R2TPN//S26R2TPH	250V~, 50/60Hz	S26R2TPF: 4000W/16A S26R2TPG: 3250W/13A S26R2TPI: 3750W/15A S26R2TPN: 4000W/16A S26R2TPH: 4000W/16A	Android & iOS
S26R2TPE/S26R2TPB/S26R2TPAI/S26R2TPJ/S26R2TPL	S26R2TPE: 250V~, 50/60Hz S26R2TPB: 120V~, 60Hz S26R2TPAI: 250V~, 50/60Hz S26R2TPJ: 250V~, 50/60Hz S26R2TPL: 250V~, 50/60Hz	S26R2TPE: 3680W/16A S26R2TPB: 1800W/15A S26R2TPAI: 4000W/16A S26R2TPJ: 4000W/16A S26R2TPL: 1500W/6A	Android & iOS

## Product Usage Instructions

1. Download the eWeLink app on your Android or iOS device.
2. Power on the Wi-Fi Smart Plug. During the first use, the device will enter quick pairing mode (Touch), and the Wi-Fi LED indicator will change in a cycle of two short flashes and one long flash and release. If you want to enter this mode again, long-press the manual button for about 5 seconds until the Wi-Fi LED indicator changes in a cycle of two short flashes and one long flash and release.
3. To add the device, tap + and select Quick Pairing on the eWeLink app. Make sure the device is in pairing mode, and follow the prompts on the app. If your device supports sound pairing, add it in this mode.
4. If you fail to enter Quick Pairing Mode (Touch), try Compatible Pairing Mode to pair. Long press the pairing button for 5 seconds until the Wi-Fi LED indicator changes in a cycle of two short flashes and one long flash and release. Long press the pairing button again for 5 seconds until the Wi-Fi LED indicator flashes quickly. Then, tap + and select Compatible Pairing Mode on the eWeLink app. Select Wi-Fi SSID with ITEAD and enter the password 12345678, and then go back to the eWeLink app and tap Next. Be patient until the pairing completes.

**Note:** The device will exit the quick pairing mode (Touch) if not paired within 3 minutes.


## Operating Instruction

### Download APP




Android™ & iOS

## Power on

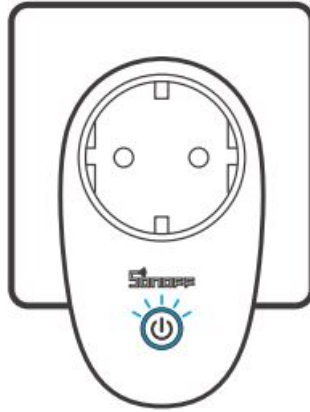

- After powering on, the device will enter the quick pairing mode (Touch) during the first use. The Wi-Fi LED indicator changes in a cycle of two short and one long flash and release.
- The device will exit the quick pairing mode (Touch) if not paired within 3mins. If you want to enter this mode, please long press the manual button for about 5s until the Wi-Fi LED indicator changes in a cycle of two short and one long flash and release.

## Add the device

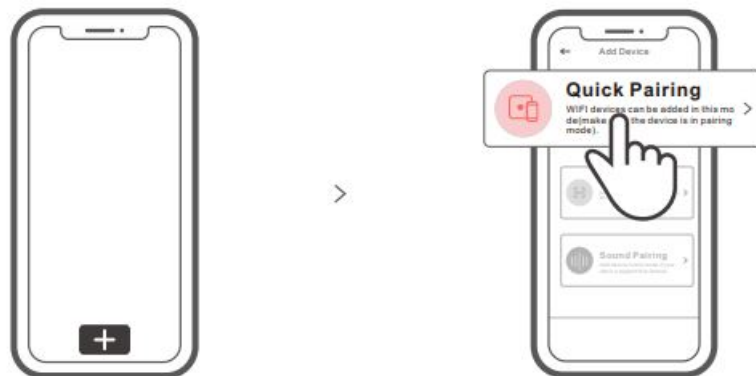

- Tap “+” and select “Quick Pairing”, then operate following the prompt on the APP.


## Compatible Pairing Mode

- If you fail to enter Quick Pairing Mode (Touch), please try “Compatible Pairing Mode ” to pair.
1. Long press pairing button for 5s until the Wi-Fi LED indicator changes in a cycle of two short flashes and one long flash and release. Long press the pairing button for 5s again until the Wi-Fi LED indicator flashes quickly. Then, the device enters Compatible Pairing Mode.
  2. Tap “+” and select “ Compatible Pairing Mode ” on APP.
  3. Select Wi-Fi SSID with ITEAD and enter the password 12345678, and then go back to eWeLink APP and tap “Next”. Be patient until the pairing completes.

## Specifications

Model	S26R2TPF/S26R2TPG/S26R2TPI/S26R2TPN//S26R2TPH S26R2TPE/S26R2TPB/S26R2TPAI/S26R2TPJ/S26R2TPL	
Input	S26R2TPF: 250V~, 50/60Hz S26R2TPG: 250V~, 50/60Hz S26R2TPI: 250V~, 50Hz S26R2TPN: 250V~, 50/60Hz S26R2TPH: 250V~, 50/60Hz	S26R2TPE: 250V~, 50/60Hz S26R2TPB: 120V~, 60Hz S26R2TPAI: 250V~, 50/60Hz S26R2TPJ: 250V~, 50/60Hz S26R2TPL: 250V~, 50/60Hz
Max. load	S26R2TPF: 4000W/16A S26R2TPG: 3250W/13A S26R2TPI: 3750W/15A S26R2TPN: 4000W/16A S26R2TPH: 4000W/16A	S26R2TPE: 3680W/16A S26R2TPB: 1800W/15A S26R2TPAI: 4000W/16A S26R2TPJ: 4000W/16A S26R2TPL: 1500W/6A
Operating systems	Android & iOS	
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz	
Working temperature	-10°C~40°C	
Material	PC V0	
Dimension	97.5x56x35mm	

## Product Introduction

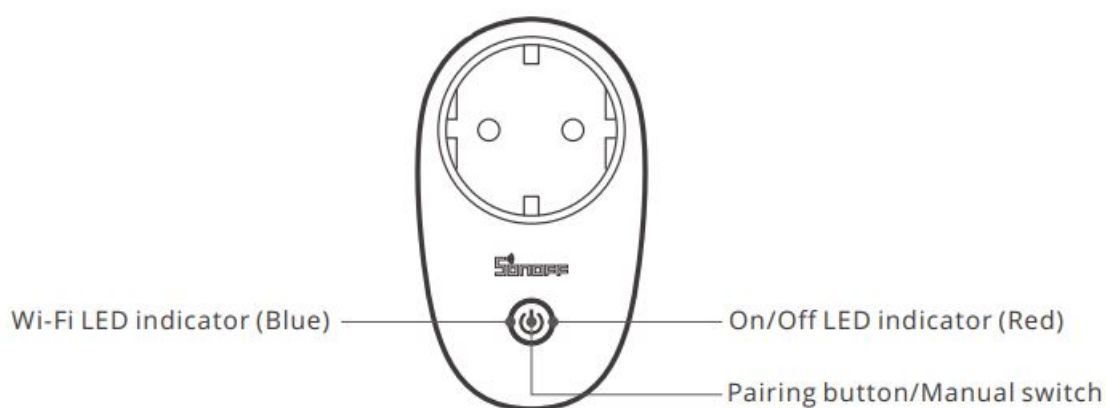


## Wi-Fi LED indicator status instruction

Wi-Fi LED indicator status	Status instruction
Flashes (one long and two short)	Quick Pairing Mode
Keeps on	The device is connected successfully
Flashes quickly	Compatible Pairing Mode
Flashes quickly once	Unable to discover the router
Flashes quickly twice	Connect to the router but fail to connect to Wi-Fi
Flashes quickly three times	Upgrading

## Features

Remotely turn on/off the device, schedule it on/off or share it with your family to control together.

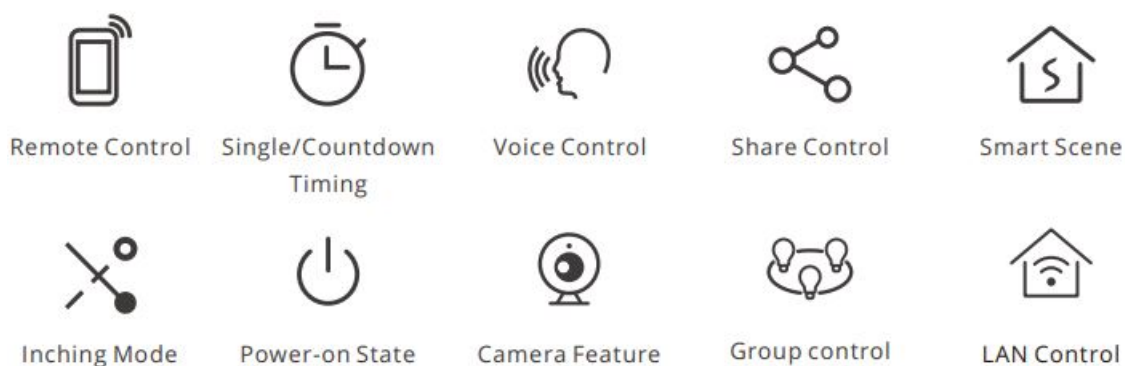

## Switch Network

If you need to change the network, long press the pairing button for 5s until the Wi-Fi LED indicator changes in a cycle of two short and one long flash and release, then the device enters quick pairing mode and you can pair again.



## Factory Reset

Deleting the device on the eWeLink app indicates you restore it to the factory setting.

### Common Problems

#### Q: Why my device stays “Offline”?

- **A:** The newly added device needs 1 – 2mins to connect to Wi-Fi and network. If it stays offline for a long time,

please judge these problems by the blue Wi-Fi indicator status:

**1. The blue Wi-Fi indicator quickly flashes once per 2 seconds, which means that the device failed to connect your Wi-Fi:**


1. Maybe you have entered the wrong Wi-Fi password.
2. Maybe there's too much distance between the switch and your router or the environment causes interference, consider getting close to the router. If failed, please add it again.
3. The 5G Wi-Fi network is not supported and only supports the 2.4GHz wireless network.
4. Maybe the MAC address filtering is open. Please turn it off.
5. If none of the above methods solved the problem, you can open the mobile data network on your phone to create a Wi-Fi hotspot, then add the device again.

**2. The blue indicator quickly flashes twice per 2 seconds, which means the device has connected to Wi-Fi but failed to connect to the server.**

Ensure a steady enough network. If double flash occurs frequently, which means you access an unsteady network, not a product problem. If the network is normal, try to turn off the power and restart the device.

- Hereby, Shenzhen Sonoff Technologies Co., Ltd. declares that the radio equipment type S26R2TPF/S26R2TPE/S26R2TPG/S26R2TPB/S26R2TPI/S26R2TPAI/S26R2TPN/S26R2TPJ/S26R2TPH/S26R2 is in compliance with Directive 2014/53/EU. The
- full text of the EU declaration of conformity is available at the following internet address:  
<https://sonoff.tech/usermanuals>
- **Shenzhen Sonoff Technologies Co., Ltd.**
- **1001, BLDG8, Lianhua Industrial Park, Shenzhen, GD, China ZIP code: 518000 Website: son off.tech**
- **MADE IN CHINA**

## Documents / Resources

 The image shows the cover of the Sonoff S26 Wi-Fi Smart Plug user manual. It features the Sonoff logo at the top left, followed by 'S26' in a large font. Below this, there are several small circular icons representing different plug types. At the bottom, it says 'Wi-Fi Smart Plug'.	<p><b><a href="#">SONOFF S26 Wi-Fi Smart Plug</a></b> [pdf] User Manual S26R2TPF, S26R2TPG, S26R2TPI, S26R2TPN, S26R2TPH, S26R2TPE, S26R2TPB, S26R2T PAI, S26R2TPJ, S26R2TPL, S26 Wi-Fi Smart Plug, Wi-Fi Smart Plug, Smart Plug</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------