

SOUNDVISION™
DW2GO
Wireless
Microphone
Systems



SOUNDVISION DW2GO Wireless Microphone Systems User Manual

[Home](#) » [SOUNDVISION](#) » SOUNDVISION DW2GO Wireless Microphone Systems User Manual 

Contents

- [1 SOUNDVISION DW2GO Wireless Microphone Systems](#)
- [2 SAFETY INFORMATION](#)
- [3 INTRODUCTION](#)
- [4 FEATURES](#)
- [5 PRODUCT INTRODUCTION](#)
- [6 PACKING LIST](#)
- [7 OPERATION](#)
- [8 SPECIFICATIONS](#)
- [9 CONTACT INFORMATION](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)



SOUNDVISION DW2GO Wireless Microphone Systems



SAFETY INFORMATION

CAUTION!

Please do read this manual carefully before using. Wireless microphones can scatter radio energy, please do follow the instruction to install and operate in case causing harmful influence. Do abide local radio regulations when using wireless microphones. We can offer you frequency products, and please choose a specific range according with local radio regulations; otherwise, you will take full responsibility of all consequences.

WARNING

- Do place receiver in open space, so that it can receive signals better.
- Do not throw the device.
- Do not place the device under rain or drop it into water.
- Keep device away from sunshine or electromagnetic field.
- Do insert batteries in the right way and remove them if device is idle for long time.
- Cut off power the supply before battery replacement.
- Pull out power adaptor from the power supply if the receiver is idle for long time.
- Do not take apart device without permission in case users are injured.
- Device does not contain any part for self-refuting, otherwise, the warranty will be void.
- Use soft cloth to clean the device, if there is any stubborn stain, clean it with neutral detergent but not volatile gasoline or thinner.
- Keep at least 30CM space around device for better ventilating.
- Do not cover ventilation holes with paper, tablecloth or curtain.
- Do not put the fire on device like burning candle.
- Keep device away from water drops, or any container with liquid like vase.
- Do not use new and old batteries at the same time, besides, replace them with same kind batteries. Discarding

batteries to specific recycling bin.

- Working temperature: 5°C – 60°C Please try below methods to solve the interfered problem when using wireless microphones
- Adjust place or direction of the antenna.
- Keep away from radio or TV.
- Do not plug into same electrical socket outlet with radio or TV.
- The best angle is 45° for mouth and microphone when speech, in order to reduce affected by airflow from the mouth.
- Using 1 microphone when 1 sound input, otherwise sound will be mixed.
- Keep a distance of mouth and microphone less than 15CM because of cardioid pickup, otherwise bass is not good.


INTRODUCTION

This product is a new type of portable wireless microphone dual handheld comfortable to hold. The receiver is equipped with a display screen for showing the working status. It is suitable for outdoor/indoor singing, music entertainment karaoke, speeches, event, broadcasting and other occasions.

FEATURES


- Digital UHF 694.5 ~ 702.7MHz frequency range.
- Frequency response 40Hz ~ 20kHz \pm 3dB
- Pre-Set 83CH selectable frequencies (Mic1 : 01-41Channels / Mic2 : 42-83Channels).
- Digital ID code, completely solve the frequency interference.
- IR sync downloading the frequency from the receiver.
- TFT display shows the microphone battery, Volume, Effects and Channels status.
- 5 Effects select : (EFX 1 – 5)
- Up to 50 Meters line-of-sight range.
- An efficient battery energy design that allows the microphone to be used continuously for longer periods of time.
- Ideal outdoor- indoor for singing, music entertainment karaoke, speeches, event, broadcasting, and other occasions.

PRODUCT INTRODUCTION

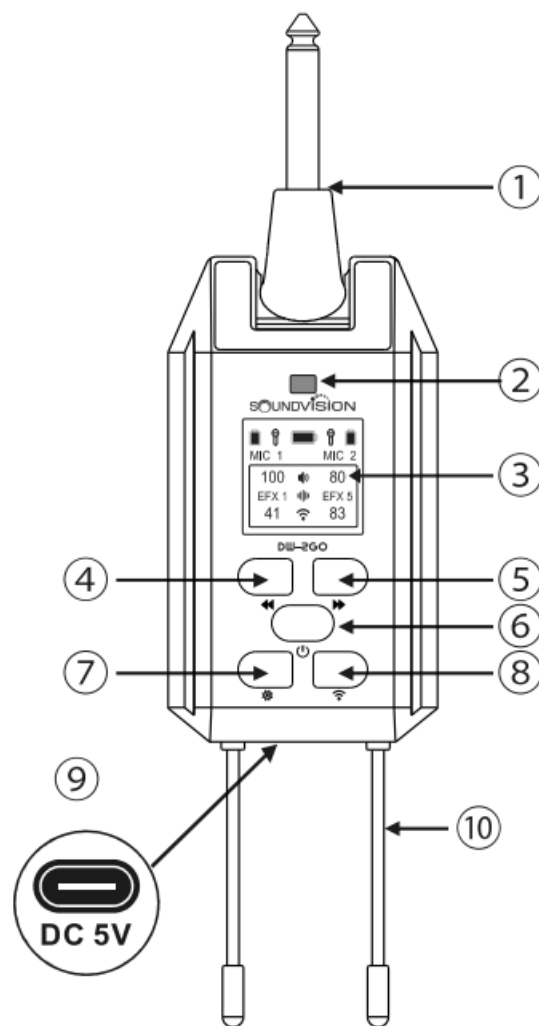


1. 6.35mm audio output plug
2. IR window
3. TFT Display : shows the battery status, volume, effect, channels.
4. UP button
5. DOWN button
6. POWER button
7. UNLOCK / SET: circulate button
8. IR button
9. Charging socket DC 5V USB type-C
10. Antenna

DISPLAY

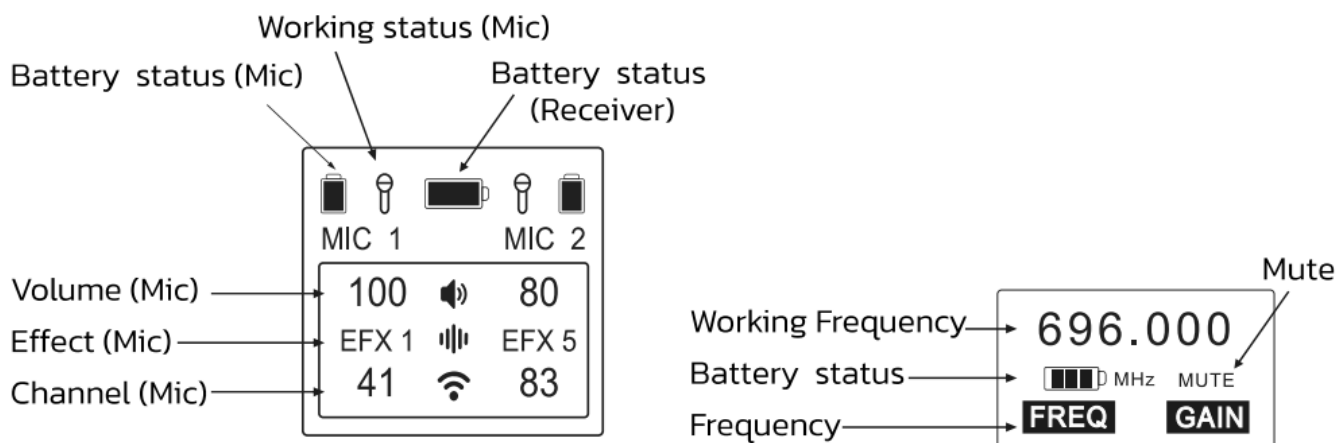

PRODUCT INTRODUCTION

TRANSMITTER

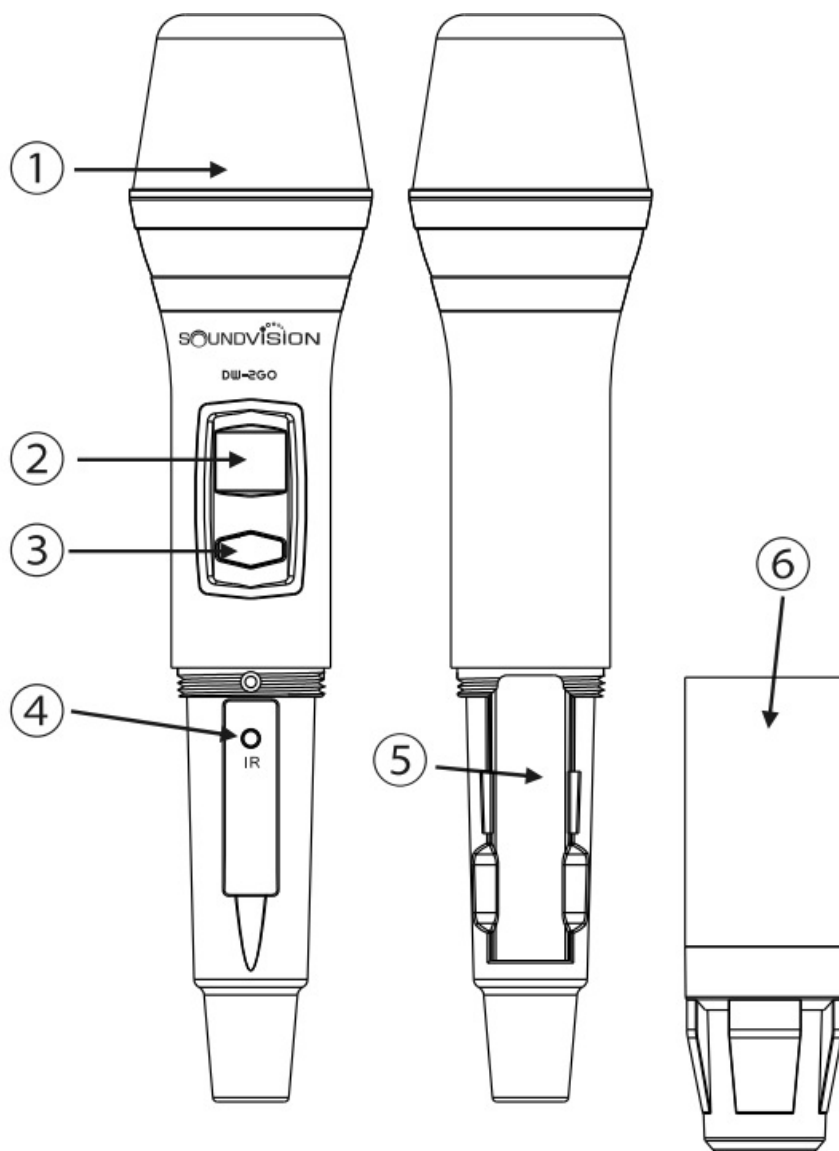

1. **CAPSULE**: pick up sound.
2. **LCD DISPLAY**: indicates microphone working status.
3. **POWER BUTTON**: control handheld microphone to be power on, off and mute.
4. **IR BUTTON**: SYNC IR signal with receiver



5. **BATTERY SINK**: insert 3V (2×1.5V AA Battery)
6. **BATTERY COVER** unscrew it when change batteries


PACKING LIST



- Receiver x 1 pc.
- Charging cable x 1 pc.
- Handheld x 2 pcs.
- 1.5V AA battery x 4 pcs.
- Storage Bag x 1 PC.
- User manual x 1 Book.

OPERATION

IR SYNC

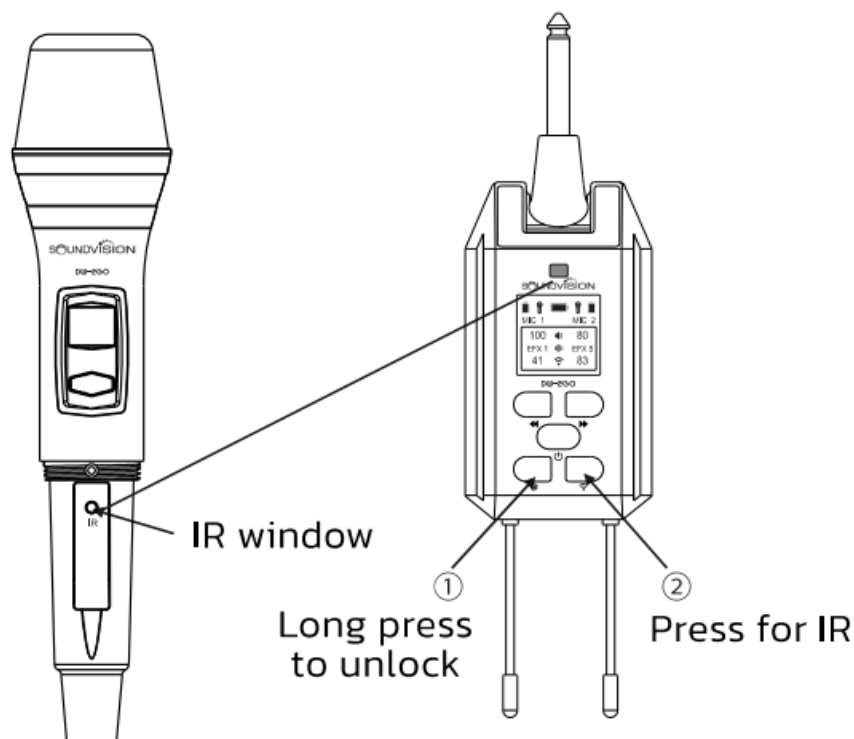Unlock the receiver by long pressing the  button under the power-on status. Then select MIC1 or MIC 2 and press the  Button or sending IR signal until the LED is flashing on the top. Turn on the microphone and unscrew the battery tank, turn the IR window towards the IR LED light on the receiver. The receiver display shows the microphone battery status and the handheld symbol changes too white color.




Unlock the receiver by long press the  button under power on status. Then short press the  button again for choose

OVOLUME (0, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100), 2) EFFECT (OFF, EFX 1, EFX 2, EFX 3, EFX 4, EFX 5). and CHANNEL for MIC 1 (01~41) / MIC 2 (42~83)


CONNECTION


6.35mm output plug, can match equipments with 6.35mm port.

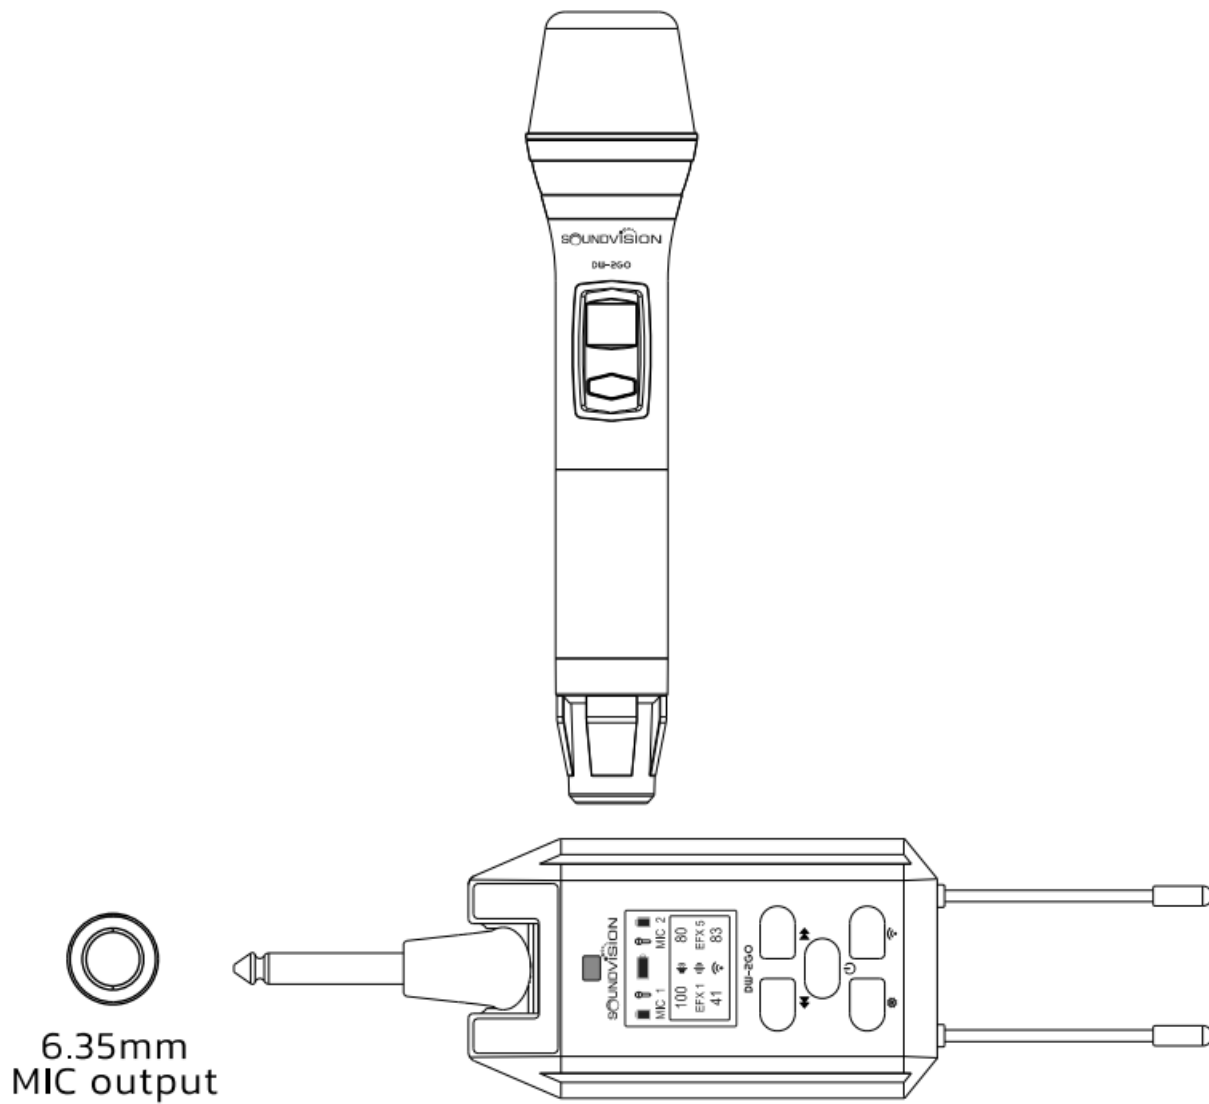

HANDHELD MICROPHONE USING TECHNIQUE

- Attention the using distance between the microphone Grille and mouth is less than 15cm.
- Make sure the grille isn't pointed at the horn.

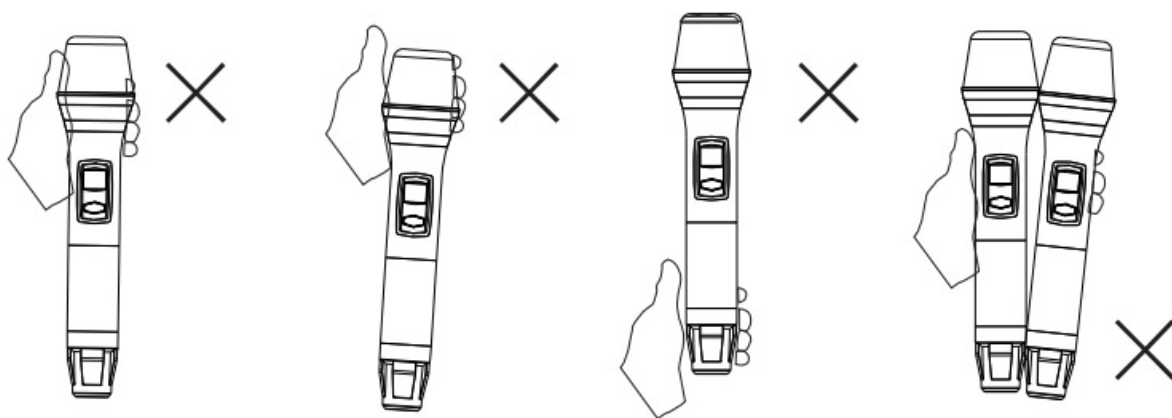

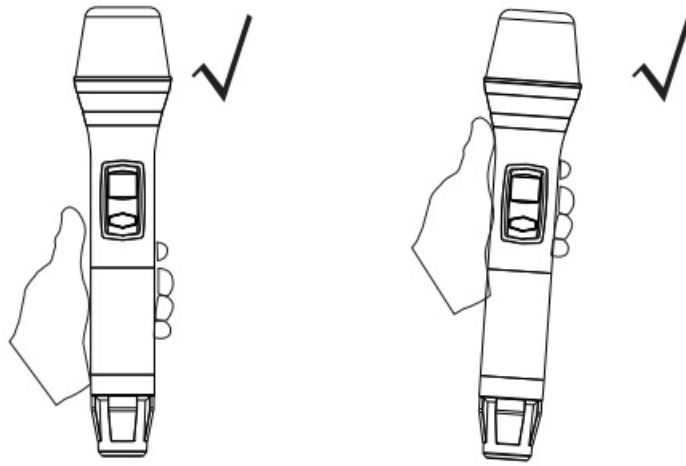

SPECIFICATIONS

- **SYSTEM** UHF 694.5 – 702.7 MHz
- **Carrier Frequency** 83CH
- **Available Channels** Mic1: 01-41 Channels
 - Mic2: 42-83 Channels
- **Bandwidth** 8.3MHz
- **Dynamic Range** >90dB
- **Total Harmonic Distortion** <0.3%
- **Frequency Response** 40Hz ~ 20kHz +3dB
- **Demodulation Mode** DOPSK
- **Sampling Rate** 48 KHz
- **Audio Output Level** 400mV 20mV

RECEIVER

- **Carrier Frequency** UHF 694.5 ~ 702.7 MHz
 - A-CH 694.5-698.5MHz / B-CH 698.6-702.7MHz
- **Frequency Response** 40Hz ~ 20kHz +3dB
- **Signal/Noise Ratio** >80dB
- **Receiving Sensitivity** -95dBm
- **Electric Current** 250mA +10mA
- **Voltage** 1300 mAh (USB Type-C Charger DC 5V)

TRANSMITTER

- **Carrier Frequency** UHF 694.5 ~ 702.7 MHz
- **Available Channels** 83CH
- **Bandwidth** 8.3MHz
- **Frequency Switch** IR SYNC
- **Microphone Type** Dynamic
- **Polar Pattern** Super-cardioid
- **Frequency Response** 50Hz – 17KHz

- **Impedance** 6000
- **Sensitivity** 54dBc
- **Output Power** 30mW
- **Harmonic Suppression** 54dBc
- **Harmonic Distortion** <0.3%
- **Electric Current** 130mA 10m A
- **Battery Voltage** 3V (2 x 1.5V AA Battery)
- **Battery Life (Alkaline Type)** approx. 8 hours

DW-2GO SERIES DIGITAL WIRELESS MICROPHONE SYSTEMS

TRADEMARK AND LICENSES



SOUNDVISION is a trademark of SOUND VISION CO., LTD. registered in Thailand, China, Laos and other countries. Names are trademarks or registered trademarks of their respective owners.

CONTACT INFORMATION

- SOUND VISION CO., LTD.
- 99/189 Moo.4, Sala Klang, Bang Kruai,
- Nonthaburi 11130 Thailand
- Support: 02-433-9988 Email: info@soundvision.co.th
- LINE Official : @soundvision www.soundvisionpro.com
- www.soundvisionpro.com

Documents / Resources

| | |
|--|--|
| | <p>SOUNDVISION DW2GO Wireless Microphone Systems [pdf] User Manual DW2GO Wireless Microphone Systems, DW2GO, Wireless Microphone Systems, Microphone Systems, Systems</p> |
|--|--|

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.