



Speakerbus iD808 iTurret Speaker Bus IP Phone System Handset User Guide

[Home](#) » [Speakerbus](#) » Speakerbus iD808 iTurret Speaker Bus IP Phone System Handset User Guide 

Contents

- [1 Speakerbus iD808 iTurret Speaker Bus IP Phone System Handset](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 OVERVIEW](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)



Speakerbus iD808 iTurret Speaker Bus IP Phone System Handset



Product Information

The turret (iD808) is a communication device designed for making and receiving calls. It features a user-friendly interface with alphanumeric keys for inputting user identification and passwords. The device supports both handsets and headsets for convenient communication. It also offers mute/unmute functionality and allows for making calls directly from the dial pad, speed dials, or directories. The iD808 supports call transferring, joining busy lines, and conference calls.

Product Usage Instructions

Logging On

1. Ensure User ID is highlighted on the Logon screen and press OK to activate the text box.
2. Type your user identification in USER ID using the alphanumeric keys and press OK to de-activate USER ID.
3. Press and hold # to shift between numbers '123' and letters 'ABC'. Press and hold * to shift between capital and lower-case letters.
4. Highlight PASSWORD and press OK to activate the text box.
5. Press and hold # to shift between numbers '123' and letters 'ABC'. Press and hold * to shift between capital and lower-case letters.
6. Highlight Logon and press OK.

Handsets/Headsets

Ensure the correct handset/headset is active prior to making and receiving calls. The active handset/headset is identified by the orange lamp soft key. To make a handset/headset active, press its soft key.

Muting/Unmuting Calls

To mute/unmute a call, press the appropriate handset soft key on the unit or press the button on the physical handset (if enabled). The soft key will turn red.

- (Handset mute)
- (Speaker mute – in hands-free mode)

Making Calls

The iD808 can originate calls by dialing directly from the dial pad, selecting speed dials, or using the directories.

Answering Calls

The iD808 announces an incoming call with a ring, illuminating soft key, and animated icon on the appearance finger. To answer a call, press the illuminating soft key.

Barge In / Joining a Line

1. Press the soft key associated with the finger the exclamation icon is displayed on to join a busy line.

Making a Line Private

1. Ensure the appropriate handset is selected by pressing the required handset soft key.
2. Press privacy / . A pad lock icon is displayed next to the phone/speaker icon. The line will become private when a call is made.
3. Press privacy / again to turn off line privacy.

Moving Calls Between Handsets/Headsets

1. During a call, select the second handset/headset soft key.
2. Select the active line soft key to move the call.

Transferring Calls

1. Press transfer /.
2. The line status changes to an on-hold state.
3. Do one of the following:
 - Dial the required number using the dial pad.
 - Locate and press the required speed dial.
 - Press to highlight Directories on the right screen and click OK. Locate and select the required contact.
 - Locate and select the required address or contact using the call register (press Q followed by OK to access the menu system option 2-Call Register).
4. To transfer the call immediately, press transfer / before pressing transfer / or speak to the recipient.

Conference Calls

1. Call the first conference participant.
2. Press conf. / when the call is connected. A conference call information box is displayed for a few seconds, stating the call has been added to a conference.
3. Call the second conference participant, press conf. / once the call is connected. A conference call information box is displayed for a few seconds, stating that the call has been added to a conference. The conference icon

is also displayed on the handset finger.

4. To add further participants, press conf. / maximum has been reached.

OVERVIEW




LOGGING ON

To Login:

1. Ensure User ID is highlighted on the Logon screen and press OK to activate the text box.
2. Type your user identification in USER ID using the alpha numeric keys and press OK to de-activate USER ID.
3. Press and hold # to shift between numbers '123' and letters 'ABC'. Press and hold * to shift between capital and lower-case letters.
4. Press ▼ to highlight PASSWORD and press OK to activate the text box.
5. Press and hold # to shift between numbers '123' and letters 'ABC'. Press and hold * to shift between capital and lower-case letters.
6. Press ▼ to highlight Logon and press OK.

HANDSETS/HEADSETS

Ensure the correct handset/headset is active prior to making and receiving calls. The active handset/headset is identified by the orange lamp soft key. To make a handset/headset active, press its soft key.

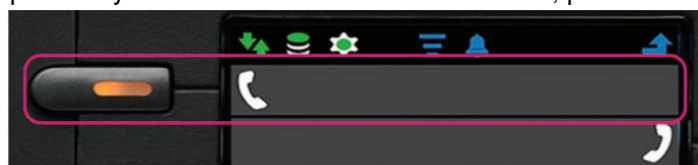

MUTING/UNMUTING CALLS

To mute/unmute a call press the appropriate handset soft key on the unit or press the button on the physical handset (if enabled). The soft key will turn red.

- (Handset mute)



- (Speaker mute – in hands-free mode)



MAKING CALLS

The iD808 can originate calls by dialling directly from the dial pad, selecting speed dials or by using the directories.

ANSWERING CALLS



The iD808 announces an incoming call with a ring, illuminating soft key and animated icon on the appearance finger. To answer a call press the illuminating soft key.

BARGE IN / JOINING A LINE

To join a busy line:

1. Press the soft key associated with the finger the exclamation icon is displayed on.


MAKING A LINE PRIVATE

1. Ensure the appropriate handset is selected by pressing the required handset soft key and then pressing privacy / . A pad lock icon is displayed next to the phone / speaker icon. The line will become private when a call is made.
2. Press privacy /  again to turn off line privacy.


MOVING CALLS BETWEEN HANDSETS / HEADSETS

1. During a call select the second handset/headset soft key.
2. Select the active line soft key to move the call.



TRANSFERRING CALLS


1. Press transfer / .
2. The line status changes to an on hold state.
 - Do one of the following:
 - Dial the required number using the dial pad.
 - Locate and press the required speed dial.
 - Press ▼ to highlight Directories on the right screen and click OK. Locate and select the required contact.
 - Locate and select the required address or contact using the call register (press Q followed by OK to

access the menu system option 2-Call Register).

3. To transfer the call immediately press transfer / or speak to recipient before pressing transfer / 

CONFERENCE CALLS

1. Call the first conference participant.
2. Press conf. /  when the call is connected. A conference call information box is displayed for a few seconds, stating the call has been added to a conference.
3. Call the second conference participant, press conf. /  once the call is connected.
 - A conference call information box is displayed for a few seconds, stating that the call has been added to a conference. The conference icon is also displayed on the handset finger.



4. To add further participants press conf. /  and repeat step 3 until the maximum has been reached


CREATING SPEED DIALS

1. Press OK to display Main menu.
2. Using ◀ or ▶ locate Program menu.
3. Using ▲ or ▼ highlight Speed Dials and press OK.
4. Highlight Add and press OK.
5. Locate an available key and press its associated soft key.
6. This displays the Speed Dial Edit screen.
7. Complete the details into the appropriate option/text boxes.
8. When finished highlight Save and press OK.
9. Press and hold Q to return to the idle screen.

CALL FORWARD

1. Press OK to display Main menu.
2. Using ◀ or ▶ locate Preferences & Tools menu.
3. Using ▲ or ▼ highlight Call Settings and press OK.
 - This displays Call Settings.
4. Highlight Call Forward and press OK.
 1. This displays Call Forward.
 - Call Forward Address – a number, IP address or SIP URL for forwarding purposes.
 - Always Call Forward – calls always forwarded.
 - Call Forward On Answer – calls forwarded if not answered after ten seconds.
 - Call Forward On Busy – calls forwarded if busy.
 - Select the appropriate options.
5. When finished highlight Save and press OK.

Documents / Resources

| | |
|---|---|
|  | Speakerbus iD808 iTurret Speaker Bus IP Phone System Handset [pdf] User Guide iD808 iTurret Speaker Bus IP Phone System Handset, iD808 iTurret, Speaker Bus IP Phone System Handset, Phone System Handset, System Handset, Handset |
|---|---|

References

- [Streamlined critical trading communications](#)