

  
ST Microelectronics  
AN6147 Authorized  
Distributor



# ST Microelectronics AN6147 Authorized Distributor User Guide

[Home](#) » [ST Microelectronics](#) » ST Microelectronics AN6147 Authorized Distributor User Guide 

## Contents

- [1 ST Microelectronics AN6147 Authorized Distributor](#)
- [2 Product Usage Instructions](#)
- [3 Introduction](#)
- [4 Hardware](#)
- [5 Calibrations conditions](#)
- [6 Features and modes](#)
- [7 Performances](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)



**ST Microelectronics AN6147 Authorized Distributor**



## Specifications

- **Hardware**

- **Module Details:**

- **VL6180:** 4.8 x 2.8 x 1.0 mm, Optical LGA 12 without liner
    - **VL53L4CD:** 4.4 x 2.4 x 1.0 mm, Optical LGA 12 with or without liner

- **Interfaces and Control:**

- **VL6180:** I2C, up to 400 kHz, Register level, XSHUTDOWN pin available
    - **VL53L4CD:** I2C, up to 1 MHz, Abstracted API, Interrupts available

- **Emission and FoV:**

- **VL6180:** 850 nm VCSEL wavelength, Class1 Laser safety
    - **VL53L4CD:** 940 nm VCSEL wavelength, EN safety standards compliant

- **Operating and Storage Conditions:**

- **Operating Voltage:** VL6180: 2.6 to 3.0 V, VL53L4CD: 2.6 to 3.5 V
    - **ESD:** +/- 2 kV for human body (VL6180), +/- 500 V for charged device model (VL53L4CD)

- **Calibrations Conditions:**

- **Offset Calibration:** VL6180: 88% reflectance target 50 mm, VL53L4CD: 17% reflectance target 10 to 255 mm
    - **Xtalk Calibration:** VL53L4CD: 17% reflectance target

## Product Usage Instructions

### Features and Modes

- **Wrap Around Detection:** Available for VL6180, not available for VL53L4CD

- **Ranging Modes:**

- **VL6180:** Single and continuous range, Polling or interrupt mode
  - **VL53L4CD:** Continuous range, Integrated in device

## Ranging Modes, Integration Time, and Frequency

- **Integration Time:** Variable up to 15 ms for VL6180, Static for VL53L4CD
- **Ranging Frequency:** Max 100 Hz for VL6180, Min 0.2 Hz for VL53L4CD

## Performances

### Frequently Asked Questions (FAQ)

- **Q: How do I switch from VL6180 to VL53L4CD in my applications?**

A: To replace VL6180 with VL53L4CD, follow these steps

- Ensure proper power supply within the specified range.
- Update your control interface settings to match the new module specifications.
- Adjust any calibration targets if needed based on the new module's requirements.

- **Q: What is the main difference between VL6180 and VL53L4CD in terms of features?**

A: The main difference lies in the availability of features such as Wrap Around Detection and Ranging Modes between the two modules.

A guide to highlight the differences between VL6180 and VL53L4CD

## Introduction

VL6180 product (order code VL6180V1NR/1) is reaching end of life. To replace this product in the customer applications, ST recommends moving to the VL53L4CD module.

This application note highlights the main differences between VL6180 and VL53L4CD, to help customers in their migration. For more details on VL6180 or VL53L4CD, refer to datasheets and user manuals listed below.

Figure 1. VL6180

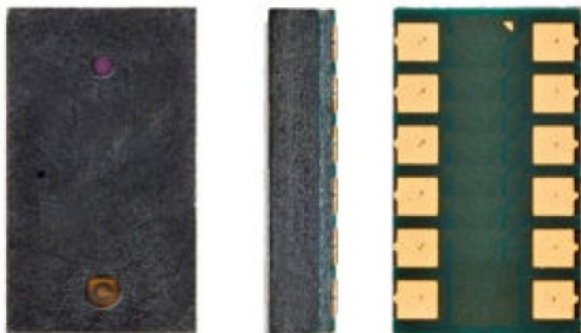


Figure 2. VL53L4CD



## References

- VL6180 datasheet (DS9818)
- VL53L4CD datasheet (DS13812)
- VL6180 user manual (UM2760)
- VL53L4CD user manual (UM2931)

## Hardware

## Module

Table 1. Module details

Parameter	VL6180	VL53L4CD
Package size	4.8 x 2.8 x 1.0 mm	4.4 x 2.4 x 1.0 mm
Package type	Optical LGA 12 without liner	Optical LGA 12 <b>with or without</b> liner
AVDD and VCSEL power supply	Single power supply	
ROHS	EcoPack2	

## Interfaces and control

Table 2. Interfaces and control

Parameter	VL6180	VL53L4CD
Interface	I2C	
Max frequency of the interface	up to <b>400 kHz</b>	up to <b>1 MHz</b>
Control	Register level	Abstracted API
Device address	0x52, reconfigurable using API	
I2C index formatting	16 bits	
XSHUTDOWN pin	<b>Available through GPIO/CE</b>	Available
Interrupt on thresholds	Available	
Drivers	C or Linux drivers	

## Emission and FoV

Table 3. Emission and FoV

Parameter	VL6180	VL53L4CD
VCSEL wavelength	<b>850 nm</b>	<b>940 nm</b>
Laser safety	Class1 IEC 60825-1:2014 EN 60825-1:2014+A11:2021 and with EN 50689:2021	
Field of view	Equivalent	

## Note

Refer to the datasheets' outline drawings section to get the detailed values, and to AN5894 for the description of the fields of view of STMicroelectronics' Time-of-Flight sensors.

## Operating and storage conditions

Table 4. Operating and storage conditions

Parameter	VL6180	VL53L4CD
Operating voltage AVDD and AVDDVCSEL	2.6 to <b>3.0 V</b>	2.6 to <b>3.5 V</b>
Operating temperature	<b>-20 to 70°C</b>	<b>-30 to 85°C</b>
Storage temperature	-40 to 85°C	
ESD	+/- 2 kV for human body +/- 500 V for charged device model	

## Calibrations conditions

Table 5. Calibrations conditions

Parameter	VL6180	VL53L4CD
Offset calibration	<b>88%</b> reflectance target <b>50 mm</b>	<b>17%</b> reflectance target <b>10 to 255 mm</b>
Xtalk calibration	17% reflectance target	

## Features and modes

### Features

Table 6. Features

Parameter	VL6180	VL53L4CD
Extended range – upscale factor	Available	<b>Not available</b>
Wrap around detection	Integrated in <b>driver</b>	Integrated in <b>device</b>
Estimated maximum ranging distance	Available	<b>Not available</b>
Getting measurement	Polling or interrupt	

## Ranging modes, integration time and frequency

Table 7. Ranging modes, integration time and frequency

Parameter	VL6180	VL53L4CD
Ranging modes	<b>Single</b> and continuous range	Continuous range
ECE (Early convergence estimation )	Available	<b>Not available</b> (refer to Section 4.3: Power consumption)
Integration time	<b>Variable, up to 15 ms</b>	<b>Static, user defined</b>
Max ranging frequency	—	100 Hz
Min ranging frequency	—	0.2 Hz
Detection thresholds	Available	
Manual temperature recalibration	Not available	<b>Available</b>

## Performances

**Test conditions:** The VL6180 and VL53L4CD are tested with default driver settings.

### Maximum ranging

Table 8. Maximum ranging

Parameter	VL6180	VL53L4CD ULD
Dark, White target (88%)	560 mm	>1300 mm
Dark, Grey target (17%)	520 mm	560 mm
500 Lux, White target (88%)	260 mm	420 mm
500 Lux, Grey target (17%)	280 mm	460 mm

### Accuracy

Table 9. Accuracy in range 10-300 nm

Parameter	VL6180	VL53L4CD ULD
Dark, White target (88%)	+/- 20 mm	+/- 10 mm
Dark, Grey target (17%)	+/- 20 mm	+/- 10 mm
500 Lux, White target (88%)	+/- 40 mm	+/- 15 mm
500 Lux, Grey target (17%)	+/- 40 mm	+/- 15 mm

Table 10. Accuracy in range >300 nm

Parameter	VL6180	VL53L4CD ULD
Dark, White target (88%)	+/- 7 %	+/- 5 %
Dark, Grey target (17%)	+/- 7 %	+/- 7 %
500 Lux, White target (88%)	+/- 15 %	+/- 15 %
500 Lux, Grey target (17%)	+/- 15 %	+/- 15 %

### Power consumption

VL6180 was tested using the standard driver which embeds a feature called ECE. This feature helps to reduce power consumption when no target is present.

VL53L4CD was tested with two driver versions

- **Ultra light driver:** the standard ultralow driver, which ranges continuously at 30 fps by default. No ECE is available on this driver. The ULD driver is available on [st.com](https://www.st.com) in the software package called STSW-IMG026
- **Optimized ultralow power driver:** this is an example code, which aims to mimic the ECE feature from VL6180. This example code is available on [st.com](https://www.st.com) in the software package called STSW-IMG049\_ECE

**Table 11. Power consumption**

Parameter	VL6180	VL53L4CD Optimized ULP driver	VL53L4CD ULD driver
Consumption without target	154 $\mu$ J	171 $\mu$ J	2700 $\mu$ J
Consumption when target is present	435 $\mu$ J	1638 $\mu$ J	2700 $\mu$ J

### Revision history

Table 12. Document revision history

Date	Version	Changes
19-Jul-2024	1	Initial release

### IMPORTANT NOTICE – READ CAREFULLY


- STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.
- Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.
- No license, express or implied, to any intellectual property right is granted by ST herein.
- Resale of ST products with provisions different from the information set forth herein shall void any warranty

granted by ST for such product.

- ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks) . All other product or service names are the property of their respective owners.
- Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 STMicroelectronics – All rights reserved

## Documents / Resources

	<p><a href="#">ST Microelectronics AN6147 Authorized Distributor</a> [pdf] User Guide VL6180V1NR-1, VL53L4CD, AN6147 Authorized Distributor, AN6147, Authorized Distributor, Distributor</p>
---	--

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.