

GNW128PSMWW

*GE® Space-Saving 2.8 DOE Cu. Ft. Capacity Portable Washer
with Stainless Steel Basket*


DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

CIRCUIT REQUIREMENTS: An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or a time-delay fuse, is required.

ELECTRICAL RATING: 120V; 60Hz

WASHER NOTE: Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

Installation Information: For complete information, see installation instructions packed with your washer.

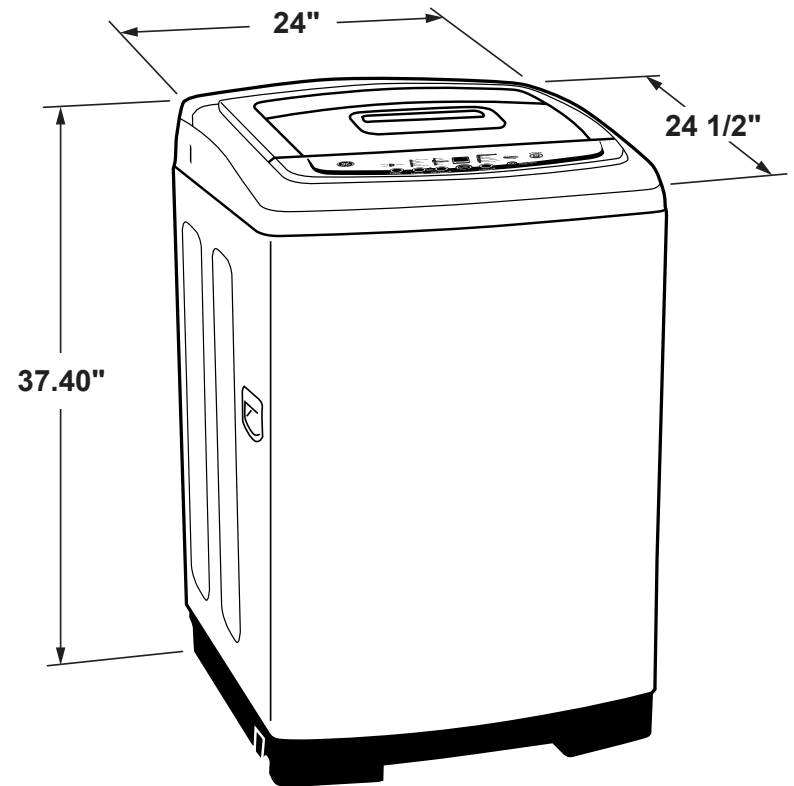

For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories

Specification Revised 1/21

***GE® Space-Saving 2.8 DOE Cu. Ft. Capacity Portable Washer
with Stainless Steel Basket***

WMK-33 Wall Kit Installation

Side View Dimensions:

- Top: 24-1/2" Max.
- Left Side: 33-1/4", 32", 79-1/4", 78", 74-1/8", 38"
- Right Side: 74-1/8"
- Bottom: 28"
- Internal: 5-1/8" (4" Dia. Exhaust), 3-1/8" (Both Sides)
- Unit Labels: DSKS433, DSKS333
- Standpipe Label: WSLP1500, WLSL1500
- Standpipe Note: Standpipe 33" Minimum. If Less Than 33" Use Syphon Break Kit WH49X228
- Service Cord Entry at Back of Appliances

Front View Dimensions:

- Top: 3-5/4"
- Left Side: 5-1/8", 3"
- Right Side: 3-1/4"
- Bottom: 23-1/4"
- Internal: 23-7/8", 6"
- Standpipe & Faucets Label: 33" Min., 120V 15 or 20A
- Service Cord Entry at Back of Appliances

Lorem ipsum

The electrical outlet must be located above the dryer, or beside the dryer if adequate dryer-to-wall clearance is available. The outlet must be within three feet on a 240 volt dryer or a 120 volt dryer from the service cord entry on the rear of the dryer.



1. Obtain two pieces of 2x4 long enough to span at least two wall studs and the width of the dryer.
2. Locate wall stud center lines. Mark wall stud center lines on two pieces of 2x4 in relationship to position dryer is to be mounted.
3. Referring to dimensional drawing, draw a horizontal reference line (72") from the floor to locate upper 2x4 support.
4. Position, level and secure upper 2x4 with four 1/4 x 3 inch wood screws. The bottom of the 2x4 should be positioned on reference line.
5. Referring to dimensional drawing, draw a horizontal reference line 32" down from the bottom of the upper 2x4 support.
6. Position, level and secure lower 2x4 with two 1/4 x 3 inch wood screws. The center line of the 2x4 should be positioned on reference line.
7. Referring to figure 1, mount the metal wall bracket 1/8 inch from the bottom of the upper 2x4 support with five 1-1/2 inch wood screws.
8. Referring to figure 2, remove one screw from each lower rear corner of dryer and, using same screws, secure lower brackets (supplied) as shown.
9. Dryer is supplied with exhaust at the top, locate and install outside exhaust duct referring to the dimensional drawing. For other optional exhaust directions as shown in dimensional drawing (rear and sides) refer to dryer installation instruction sheet.
10. Position the dryer on the wall mounting bracket and check that the dryer is plumbed.
11. If the dryer needs plumbing, use some of the twelve washers supplied with the kit as spacers behind lower brackets of figure 2 and secure the dryer to the lower 2x4 support using the remaining 1-1/2 inch wood screws.

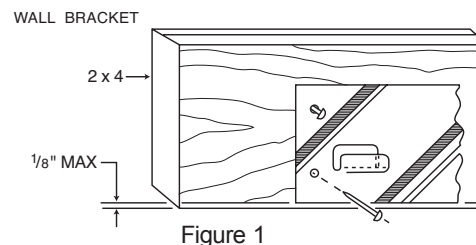


Figure 1

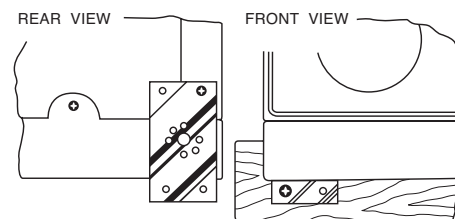


Figure 2

CAUTION
The 120 volt receptacle on the back of the 240 volt dryer must not be used with this wall mount kit.

GNW128PSMWW

GE® Space-Saving 2.8 DOE Cu. Ft. Capacity Portable Washer with Stainless Steel Basket

FEATURES AND BENEFITS

Large Capacity – Ample space for clothes for fewer wash loads

Small Footprint – Perfect for small spaces that won't fit a full size washer

Caster Wheels Included – Easily maneuver and store the portable washer between uses

Included Unicoupler – Quickly connect the washer hoses to a standard kitchen or bathroom sink

Electronic one-touch controls with LED read-out – Simplify cycle selection and provide accurate cycle times

8 wash cycles – Handle various fabrics and soils

Four Wash Temperatures – Maximize results by selecting the perfect temperature for your fabric

Stainless steel basket – It resists rust and won't chip, peel or snag clothes

Model GNW128PSMWW – White

