



# StarTech com ADJSHELFHDV2 1U 4-Post Vented Adjustable Mounting Depth Heavy Duty Shelf User Guide

[Home](#) » [StarTech.com](#) » StarTech com ADJSHELFHDV2 1U 4-Post Vented Adjustable Mounting Depth Heavy Duty Shelf User Guide 

## Contents


- [1 StarTech com ADJSHELFHDV2 1U 4-Post Vented Adjustable Mounting Depth Heavy Duty Shelf User Guide](#)
- [2 1U 4-Post Vented Adjustable Mounting Depth Heavy Duty Shelf – 27.5 in Depth](#)
- [3 Product Diagram ADJSHELFHDV2](#)
- [4 Package Contents](#)
- [5 Requirements](#)
- [6 Installation](#)
- [7 Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols](#)
- [8 Warranty Information](#)
- [9 Limitation of Liability](#)
- [10 Safety Measures](#)
- [11 Read More About This Manual & Download PDF:](#)
- [12 Documents / Resources](#)
  - [12.1 References](#)

# StarTech com ADJSHELFHDV2 1U 4-Post Vented Adjustable Mounting Depth Heavy Duty Shelf User Guide



1U 4-Post Vented Adjustable Mounting Depth Heavy Duty Shelf – 27.5 in Depth

Product Diagram ADJSHELFHDV2

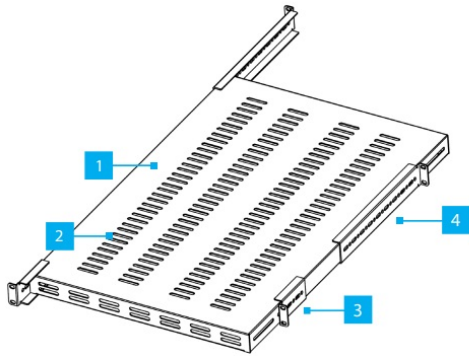

Component		Function
1	Shelf Surface	<ul style="list-style-type: none"> <li>Mount the server rack equipment</li> </ul>
2	Ventilation Holes	<ul style="list-style-type: none"> <li>Promote air flow for the mounted equipment. The dimensions are 1.6 x 0.25 in (40 x 6.5 mm)</li> </ul>
3	Front Mounting Brackets	<ul style="list-style-type: none"> <li>Fasten <b>Shelf</b> to the <b>Front Posts</b> of the rack or cabinet</li> <li>Holes on the sides of the <b>Mounting Brackets</b> allow for <b>Depth Adjustment</b>. <b>M6x12 mm Screws</b> (x 4) secure the <b>Mounting Brackets</b> to the desired depth</li> <li>Allows for up to 5.7 in (146.9 mm ) depth adjustment</li> </ul>
4	Rear Mounting Brackets	<ul style="list-style-type: none"> <li>Fasten <b>Shelf</b> to the <b>Rear Posts</b> of the rack or cabinet</li> <li>Holes on the sides of the <b>Mounting Brackets</b> allow for <b>Depth Adjustment</b>. <b>M6x12 mm Screws</b> (x 4) secure the <b>Mounting Brackets</b> to the desired depth</li> <li>Allows for up to 13 in (332.1 mm) depth adjustment</li> </ul>

## Package Contents

- 1U Shelf Body x 1
- Front Mounting Brackets x 2
- Rear Mounting Brackets x 2
- M6x12 mm Screws x 8
- M6 Cage Nuts x 8
- M6 Plastic Washers x 8
- Quick-Start Guide x 1

## Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit: [www.StarTech.com/ADJSHELFHDV2](http://www.StarTech.com/ADJSHELFHDV2)

- For square cage holes, M6 cage nuts are included. For M6 threaded holes, no cage nuts are needed. Refer to the manufacturer of the rack to determine the mounting hole type
- Phillips head screwdriver
- Cage nut tool (Optional)

## Warnings!

*Read the entire Quick-Start Guide and ensure the instructions are fully understood before assembling and using this product.*

*Before adding equipment to this product, ensure this product has been properly mounted.*

*Never operate this product if parts are missing or damaged.*

*Ensure the weight of the equipment does not exceed the weight capacity of this product. If the weight capacity is exceeded, personal injury or damage to the equipment is possible. This product can support the following weight: up to 330 lb (150 kg). The maximum supported weight is only possible when all four mounting brackets are properly mounted to all posts on a four post rack.*

*Arrange your equipment in the rack in descending order of weight. The lightest equipment is installed at the top of the rack, and the heaviest is on the bottom.*

## Installation

1. Locate a suitable location in the rack or cabinet to mount the **Shelf**. The **Shelf** requires **1U** of **Space**.

*To mount the shelf leveled, ensure the mounting brackets are mounted on the same U height number. To determine this, most four posts racks or cabinets have labeled front and rear posts. Determine the **Depth** of the **Mounting Posts** on the The*

2. **Adjustable Mounting Depth** of the **Shelf** is from 19.5 in (495 mm) to 38.3in (974 mm).

1. Use a **Phillips Head Screwdriver** to **Loosen** the **Screws** of the **Front** and **Rear Mounting Brackets** so they can slide Each **Mounting Bracket** uses **Two Screws**.
2. (Optional) Remove all the **Screws** (x 8) of the **Front** and **Rear Mounting Brackets** if the adjustment requires different **Depth Adjustment Holes** on the sides of the **Shelf**.
3. Adjust the **Front** and **Rear Mounting Brackets** to achieve the same **Mounting Depth** as the **Mounting Posts** of the Next, secure the **Screws** (x 8) of the **Front** and **Rear Mounting Brackets** with a **Phillips Head Screwdriver**.
4. (Optional) Install the **M6 Cage Nuts** (x 8) into the appropriate **Cage Nut Holes** (x 8) on the chosen **U Height Number** on the **Mounting Posts** of the  
*Use a cage nut tool if available or your preferred installation method to install the M6 Cage Nuts.*
6. Place the **M6 Plastic Washers** (x 8) onto the **M6 Screws** (x 8).
7. Place the **Shelf** into the rack in the chosen **U Height Number**. **Align** the **Mounting Holes** of the **Front Mounting Posts** of the rack with the **Front Mounting Brackets**. Keep supporting the weight of the
8. Use a **Phillips Head Screwdriver** to install the **M6x12 mm Screws** and fasten the **Front Mounting Brackets** to the **Front Mounting Posts** of the rack. Ensure the **M6x12 mm Screws** are properly
9. Repeat **Step 8** for the **Rear Mounting Brackets**.
10. (Optional) Make minor depth adjustments to the **Front** and **Rear Mounting Brackets**

## Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an

endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech. com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

PHILLIPS® is a registered trademark of Phillips Screw Company in the United States or other countries.

Warranty Information

This product is backed by a lifetime warranty. For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

Limitation of Liability


In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Safety Measures

Read the entire manual and ensure the instructions are fully understood before assembling and/or using this product.

Read More About This *Manual* & Download PDF:

Documents / Resources

	<p><a href="#">StarTech.com ADJSHELFHDV2 1U 4-Post Vented Adjustable Mounting Depth Heavy Duty Shelf [pdf] User Guide</a></p> <p>ADJSHELFHDV2 1U 4-Post Vented Adjustable Mounting Depth Heavy Duty Shelf, ADJSHELF HDV2, 1U 4-Post Vented Adjustable Mounting Depth Heavy Duty Shelf, Adjustable Mounting Depth Heavy Duty Shelf, Mounting Depth Heavy Duty Shelf, Depth Heavy Duty Shelf, Heavy Duty Shelf, Duty Shelf, Shelf</p>
---	---

References

- [StarTech.com | IT Pro's Trusted Source for Connectivity Accessories](#)
- [1U Adjustable Vented Rack Mount Shelf - Rack Shelves | Server Rack Accessories | StarTech.com](#)
- [StarTech.com Support](#)
- [StarTech.com Warranty Policy](#)