

StarTech Com RK4OD 19 Inch Open Frame 2 Post Desktop Rack User Guide


[Home](#) » [StarTech.com](#) » StarTech Com RK4OD 19 Inch Open Frame 2 Post Desktop Rack User Guide 



Contents

- [1 StarTech Com RK4OD 19 Inch Open Frame 2 Post Desktop Rack User Guide](#)
- [2 Package Contents](#)
- [3 Product Diagram](#)
- [4 Requirements](#)
- [5 Warning Statements](#)
- [6 Installation](#)
- [7 Equipment Installation](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)

StarTech Com RK4OD 19 Inch Open Frame 2 Post Desktop Rack User Guide

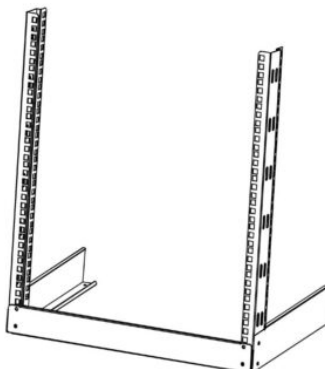

(RK4OD, RK4OD2, RK8OD, RK8OD2, RK12OD, RK12OD2)


Package Contents

- Left Base Bracket x 1
- Right Base Bracket x 1
- Front Base Bracket x 1
- Left Vertical Rail x 1
- Right Vertical Rail x 1
- Rubber Feet x 4
- M5x12mm Assembly Screws x 8
- Quick-Start Guide x 1
- M5/M6 Cage Nuts (QTY outlined in table below)
- Rackmount Screws (QTY outlined in table below)
- Plastic Washers (QTY outlined in table below)

Product ID	M5/M6 Cage Nuts QTY	Rackmount Screws QTY	Plastic Washers QTY
RK4OD / RK4OD2	16x	16x	16x
RK8OD / RK8OD2	Rev 01: 20x Rev 02 or above: 32x	Rev 01: 20x Rev 02 or above: 32x	Rev 01: 20x Rev 02 or above: 32x
RK12OD / RK12OD2	Rev 01: 20x Rev 02 or above: 48x	Rev 01: 20x Rev 02 or above: 48x	Rev 01: 20x Rev 02 or above: 48x

Product Diagram

(RK4OD, RK4OD2, RK8OD, RK8OD2, RK12OD, RK12OD2)

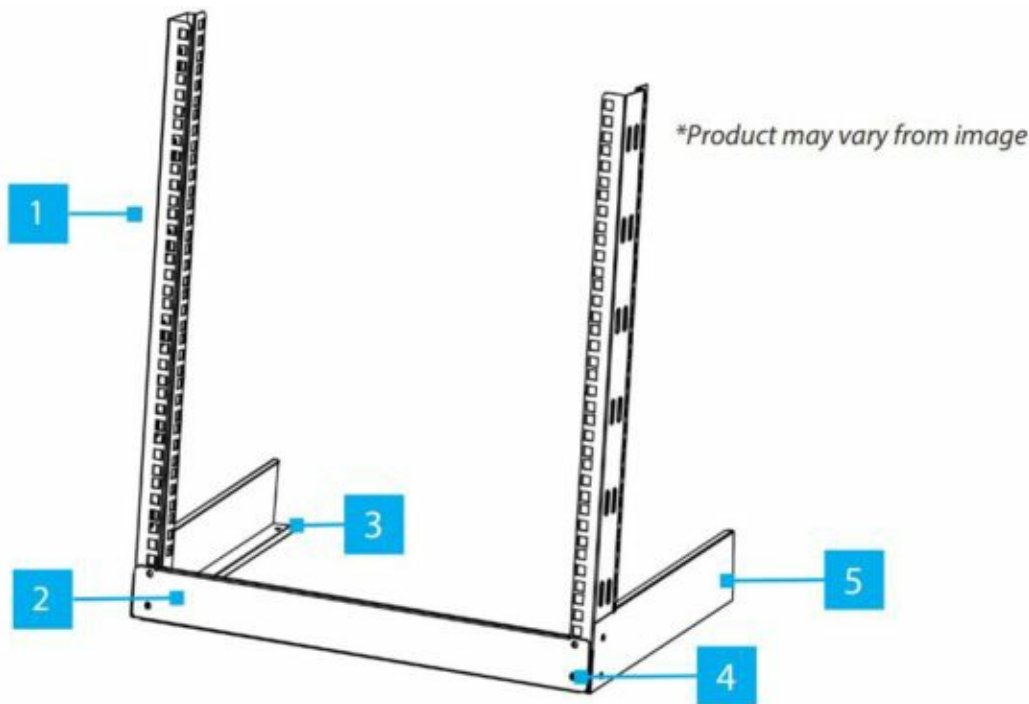

Component		Function
1	Vertical Rails	• Feature Square Cage Nut Holes to mount your equipment
2	Front Base Bracket	• Stabilizes the frame and adds rigidity
3	Rubber Feet Holes	• Insert the Rubber Feet to protect the surface
4	Assembly Holes	• Used to connect the Vertical Rails, Front Base Bracket, and Base Brackets together
5	Base Brackets	• Stabilizes the frame and adds rigidity

Requirements

- Phillips head screwdriver
- Cage nut tool (Optional)

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:

www.StarTech.com/RK4OD www.StarTech.com/RK4OD2 www.StarTech.com/RK8OD
 www.StarTech.com/RK8OD2 www.StarTech.com/RK12OD www.StarTech.com/RK12OD2

Warning Statements

Make sure to assemble this product according to the instructions. Failure to do so might result in personal injury or property damage.

Make sure that the weight of the equipment doesn't exceed the weight capacity of this product. If you exceed the weight capacity, you might experience personal injury or damage to the equipment.

This product can support the following weight:

RK4OD: Rev 01 up to 66lb (30kg); Rev 02 or above up to 88lb (40kg).

RK4OD2: up to 88lb (40kg).

RK8OD/RK8OD2/RK12OD/RK12OD2: up to 110lb (50kg).


This product poses a tipping risk. Make sure to follow the installation instructions. Failure to do so might result in personal injury or property damage.

Never operate this product if parts are missing or damaged.

To view manuals, FAQs, videos, drivers, downloads, technical drawings, and more, visit www.startech.com/support.

Installation

Rack Assembly

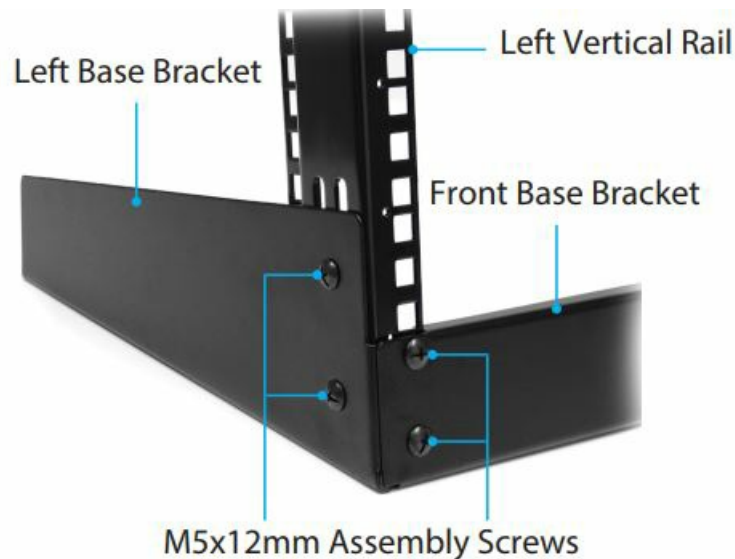

1. Push from the Top to Unlatch the Pins (x 4) from the center of the Rubber Feet (x 4).
2. Push the Rubber Feet (x 4) into the Rubber Feet Holes (x 4) on the underside of the Left Base Bracket and Right Base Bracket. Next, Push from the Bottom to Latch the Pins (x 4) back into the center of the Rubber Feet.
3. Align the Assembly Holes (x 2) on the side of the Left Base Bracket with the Assembly Holes (x 2) on the side of the Left Vertical Rail.
4. Insert the Assembly Screws (x 2) through the Left Base Bracket and into the Left Vertical Rail. Tighten the Assembly Screws (x 2) using a Phillips Head Screwdriver.
5. Repeat Steps 3 and 4 with the Right Base Bracket and the Right Vertical Rail.
6. Align the Assembly Holes (x 2) on the Front Base Bracket with the Assembly Holes on the front of the Left Base Bracket.
7. Insert the Assembly Screws (x 2) through the Front Base Bracket and into the Left Base Bracket. Tighten the Assembly Screws (x 2) using a Phillips Head Screwdriver.
8. Repeat Steps 6 and 7 for the Right Base Bracket.

Equipment Installation

It is recommended that equipment be installed in a manner that spreads the load across available U height as much as possible, with the lightest device installed at the top of the rack and the heaviest device installed at the bottom of the rack.

1. Install the M5/M6 Cage Nuts onto the desired Cage Nut Holes where the Equipment will go. Use a Cage Nut Tool if available or your preferred installation method.
2. Use a Phillips Head Screwdriver to install the Rackmount Screws and secure the Equipment onto the rack.
Caution! Do not move the rack with the equipment mounted. If relocation of the rack is required, remove the equipment from the rack and relocate the empty rack. Mount the equipment back into the rack.



StarTech.com Ltd.
45 Artisans Crescent
London, Ontario
N5V 5E9
Canada

StarTech.com LLP
4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

www.quefairedemesdechets.fr

StarTech.com Ltd.
Unit B, Pinnacle 15
Gowerton Road
Brackmills,
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp

Regulatory Compliance

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders. PHILLIPS® is a registered trademark of Phillips Screw Company in the United States or other countries.

Warranty Information

This product is backed by a lifetime warranty.


For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Read More About This Manual & Download PDF:

Documents / Resources



[StarTech Com RK4OD 19 Inch Open Frame 2 Post Desktop Rack](#) [pdf] User Guide
RK4OD, RK4OD2, RK8OD, RK8OD2, RK12OD, RK12OD2, RK4OD 19 Inch Open Frame 2 Post Desktop Rack, 19 Inch Open Frame 2 Post Desktop Rack, Frame 2 Post Desktop Rack, 2 Post Desktop Rack, Desktop Rack, Rack

References

- [StarTech.com | IT Pro's Trusted Source for Connectivity Accessories](#)
- [Unsere Produkte dienen IT- und A/V-Profis zum Verbinden, Konvertieren, Erweitern, Splitten und Switchen | Deutschland](#)
- [StarTech.com diseña y fabrica una variada gama de componentes para ordenadores, cables, conmutadores KVM, racks para... | España](#)
- [StarTech.com conçoit et fabrique une vaste sélection de pièces d'ordinateur, de câbles, de commutateur KVM, de racks... | France](#)
- [Pezzi per computer, cavi, switch KVM, server rack e soluzioni per reti | Italia](#)
- [IT & A / V](#)
- [StarTech.com ontwerpt en produceert een enorme selectie computeronderdelen, kabels, KVM-switches, serverracks en... | Nederland](#)
- [12U 19in Desktop Open Frame 2 Post Rack - Server-Racks | Server Management | StarTech.com](#)
- [All Products | StarTech.com](#)
- [4U 19in Desktop Open Frame Rack 2-Post - Server-Racks | Server Management | StarTech.com](#)
- [4U 19in Desktop Open Frame Rack 2-Post - Server-Racks | Server Management | StarTech.com](#)
- [Desktop Rack 8U 2 Post Open Frame Rack - Server-Racks | Server Management | StarTech.com](#)
- [All Products | StarTech.com](#)
- [StarTech.com Support](#)
- [StarTech.com Warranty Policy](#)
- [User Manual](#)