





### Data communications at 9600 baud

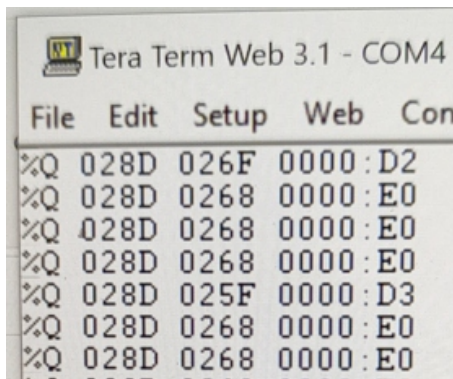

Road and Air temp only

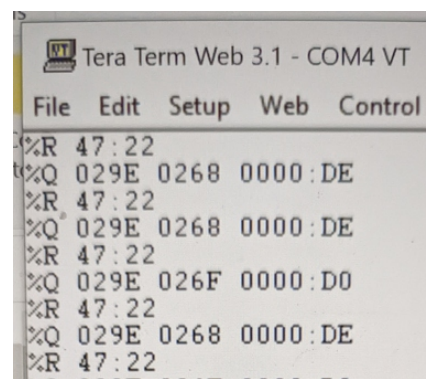

Road, Air, and Relative Humidity

### Secondary port connection option

Use the secondary port "Only" if the primary port is occupied for spreader integration

Connection requires standard straight through serial cable HRN-DB9SI15 + M/M Null Gender changer

