

Surenno SLG240128D Graphic LCD Module



Surenno SLG240128D Graphic LCD Module User Manual


[Home](#) » [Surenno](#) » Surenno SLG240128D Graphic LCD Module User Manual 

Contents

- 1 Surenno SLG240128D Graphic LCD Module
- 2 Product Specifications
- 3 Product Usage Instructions
- 4 Frequently Asked Questions
- 5 ORDERING INFORMATION
- 6 SPECIFICATION
- 7 OUTLINE DRAWING
- 8 ELECTRICAL SPEC
- 9 INSPECTION CRITERIA
- 10 PRECAUTIONS FOR USING
- 11 USING Graphic MODULES
- 12 IMAGE STICKING
- 13 Documents / Resources
 - 13.1 References



Surenno SLG240128D Graphic LCD Module

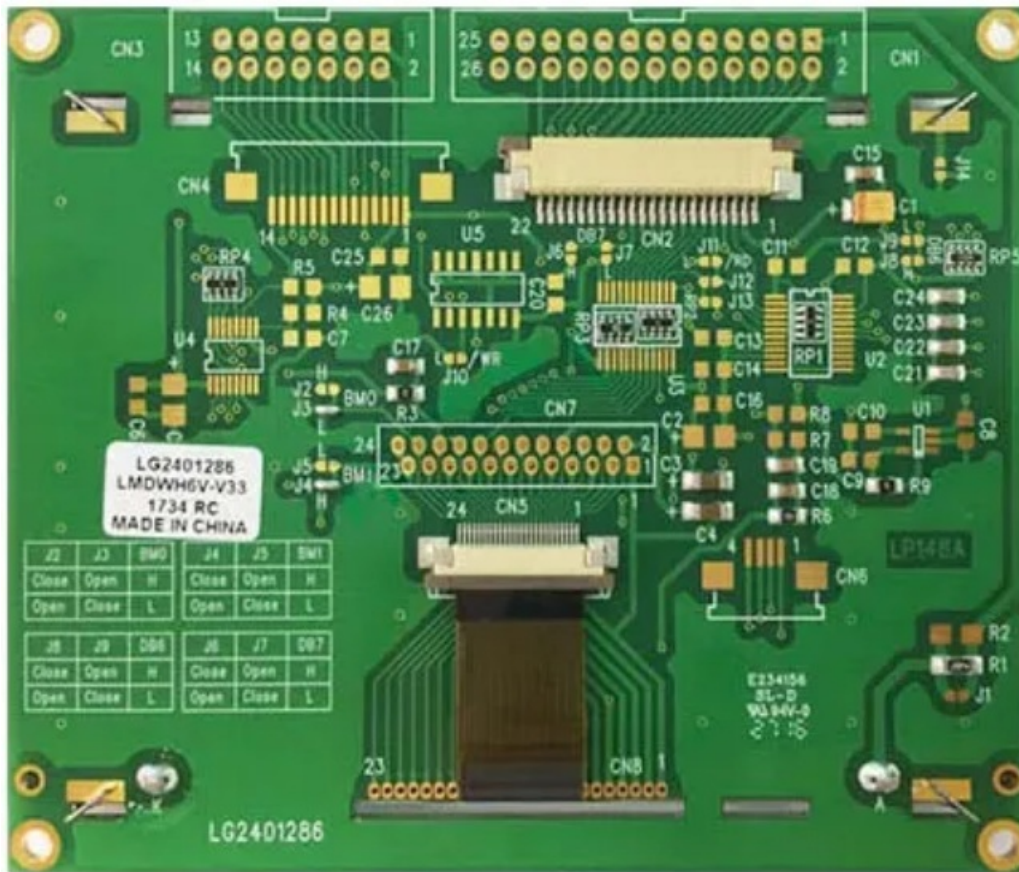

Product Specifications

Model No.: SLA3G240128D

SLG240128D Series

- Display Size: 240*128
- Outline Size: 100.00*85.00 MM
- Viewing Area: 92.00*52.00 MM
- Interface: 8 Bit Parallel, Serial SPI
- Voltage: 3.3V
- Controller: UC1608

Product Usage Instructions

1. Outline Drawing

Refer to the outline drawing in the manual to understand the physical dimensions of the LCD module.

2. Electrical Connection

Connect the LCD module to your device using the specified interface (8 Bit Parallel or Serial SPI) and ensure the voltage is 3.3V.

3. Powering On

Apply power to the LCD module and controller according to the electrical specifications provided.

4. Displaying Graphics

Use the reference controller datasheet to program and display graphics on the LCD module.

Frequently Asked Questions

- **Q: How do I connect the LCD module to my device?**
 - A: You can connect the LCD module using either the 8 Bit Parallel interface or the Serial SPI interface, based on your device's compatibility.
- **Q: What is the recommended voltage for operating the LCD module?**
 - A: The recommended operating voltage for the LCD module is 3.3V as per the specifications.

QR Code



Shenzhen Surennoo Technology Co.,Ltd

- www.surennoo.com

Skype: Surennoo365

Reference Controller Datasheet

ORDERING INFORMATION

Order Number

Model No.	Display	Size	Outline Size (MM)	Viewing Area (MM)	Area Area (MM)	Interface	Voltage	Controller	MARK	Color Valid	Image
SLG240128E COG	240*128	3.8"	100.00*85.00	92.00*52.00	83.98*44.78	2X13P/2.54 8 Bit Parallel 2X7P/2.54 Serial SPI	3.3V	UC1608		SURENOO SURENOO	

SPECIFICATION

Display Specification

ITEM	STANDARD VALUE	UNIT
63B60B57B50BDot Matrix	240 x 128 Dots	—
66B63B60B68BDisplay Connector	Pin Header, 21+20 Pins	—
70B67B64B86BOperating Temperature	-20~ +70	°C72B6 9B66B8 8B
73B70B67B89BStorage Temperature	-30 ~ +80	°C75B7 2B69B9 1B
Touch Panel Optional	N/A	—
82B79B76BFont Chip Optional	83B80B77B N/A	—

Mechanical Specification

86B83B80BITEM	STANDARD VALUE	UNIT
89B86B83BOutline Dimension	100.00(W) × 85.00(H) × 11.50(T) (MAX)	mm
92B89B86BVisual Area	92.00(W) × 52.00(H)	mm
94B91B88BActive Area	83.98(W) × 44.78(H)	mm
96B93B90B83BDot Size	0.325×0.325	mm
99B96B93BDot Pitch	0.35×0.35	mm
102B99B96B92BNet Weight	100.0 ± 15% grams (typical)	g104B1 01B98B 94B


Electrical Specification

106B103B100BITEM	STANDARD VALUE	UNIT
109B106B103B71BIC Package	COG	—
112B109B106B71BController	110B107B104B72B UC1608	—
115B112B109B95BInterface	8080 8-bit Parallel / 4-Wire SPI	—

Optical Specification

119B116B113BITEM	STANDARD VALUE	UNIT
122B119B116B53BLCD Type	Refer to 1.1 SLG240128D Series Table	—
125B122B119B65BBacklight Color	Refer to 1.1 SLG240128D Series Table	—
128B125B122B62BViewing Direction	6:00	130B12 7B124B 64BClo ck
131B128B125B56BLCD Duty	1/128	133B13 0B127B 58BDut y
134B131B128B59BLCD Bias	1/14	Bias

OUTLINE DRAWING

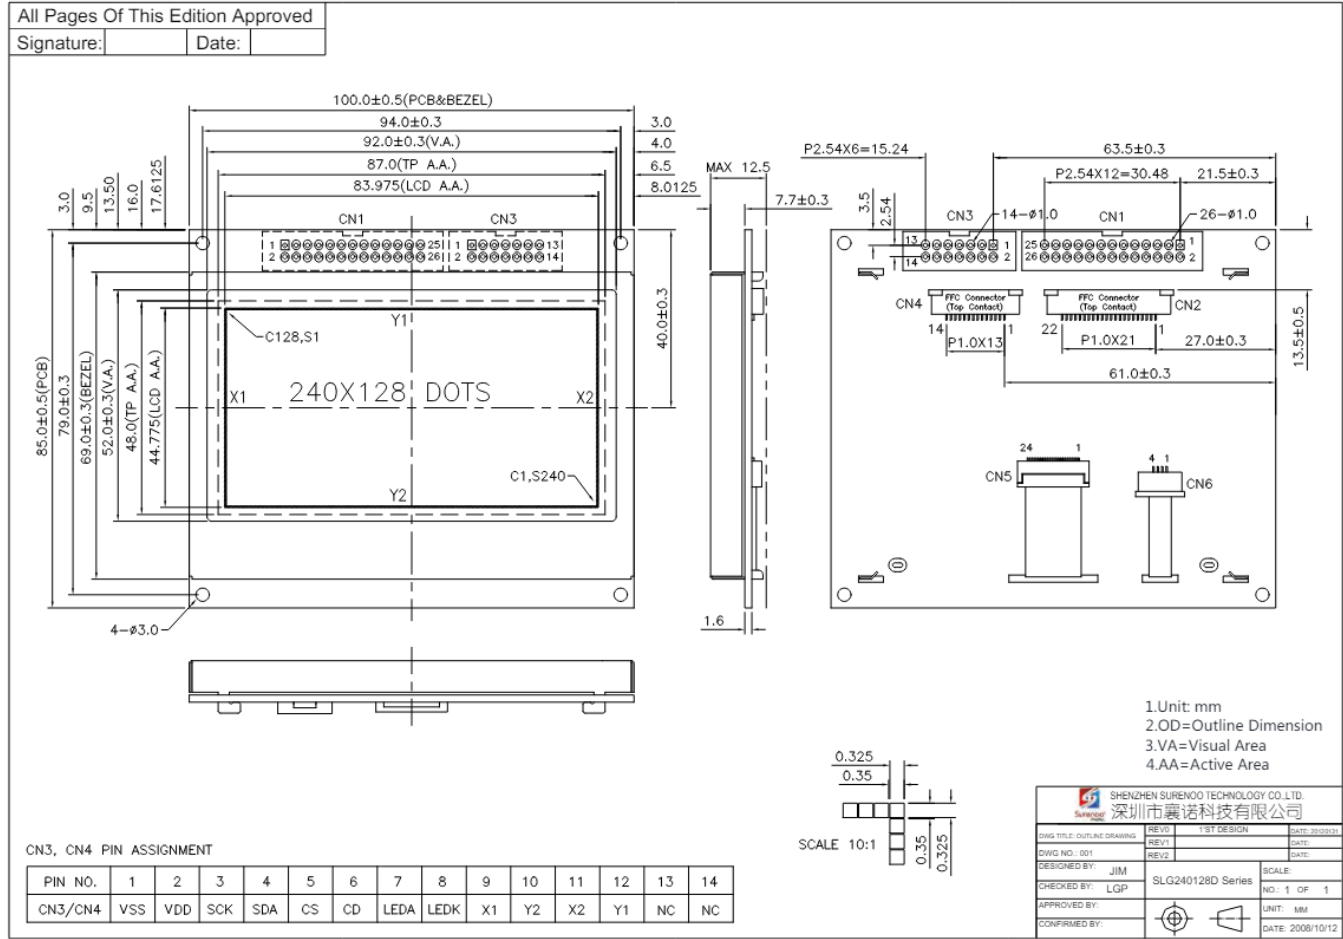


ELECTRICAL SPEC

Pin Configuration (CN1/CN2)

Pin	Symbol	Level	Function
1	V _{SS}	0V	GND
2	V _{DD}	3.3V	Power supply for logic
3	CD	H/L	H:Display data L:Instruction code
4	/WR(R/W)	H/L	/WR for 80 MPU, R/W for 68 MPU
5	/RD(E)	H/L	/RD for 80 MPU, E for 68 MPU
6	D0	H/L	Data bus
7	D1	H/L	
8	D2	H/L	
9	D3	H/L	
10	D4	H/L	
11	D5	H/L	
12	D6	H/L	
13	D7	H/L	
14	CS	H	Chip selection signal. Active "H".
15	LEDA	3.3V	Power supply for LED backlight
16	LEDK	0V	
17-22	NC	--	No connection
23-26	NC	--	No connection

CN3,CN4 PIN ASSIGNMENT					
PIN NO.	1	2	3	4	5
CN3/CN4	VSS	VDD	SCK	SDA	CS
					CD
					LEDA
					LEDK
					9-14
					NC

Block Diagram

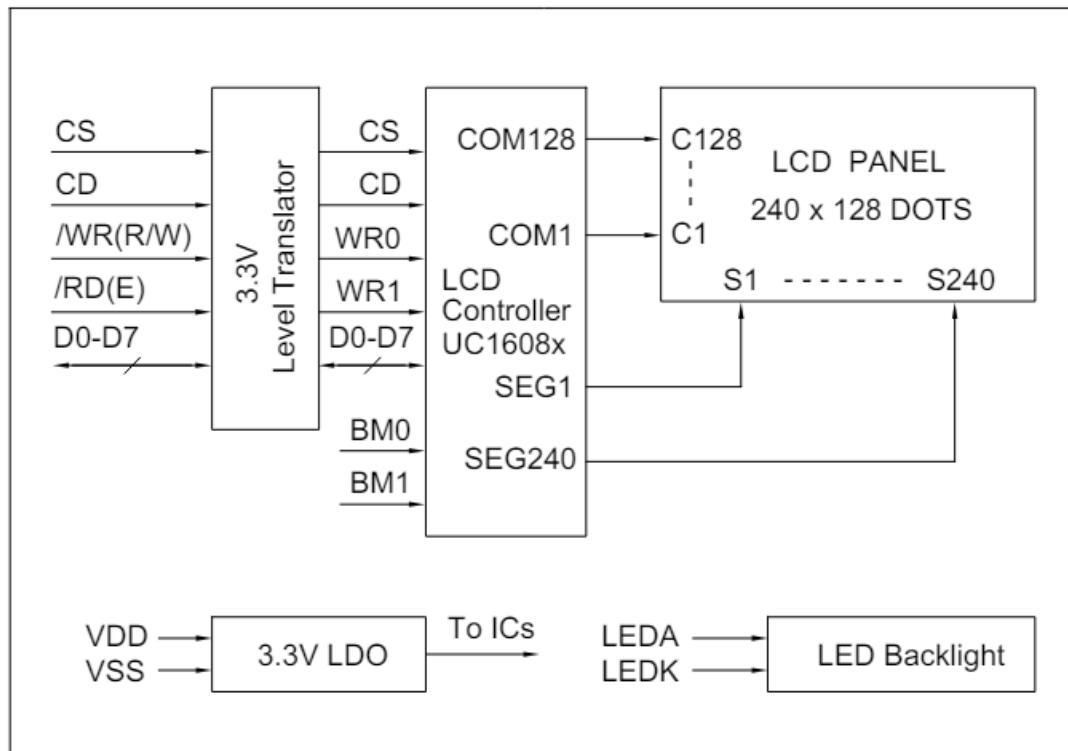

Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit
Supply Voltage(Logic)	V _{DD} - V _{SS}	-0.3	6.0	V
Supply Voltage(LCD)	V _{LCD} - V _{SS}	-0.3	17.0	V
Input Voltage	V _I	-0.3	V _{DD} + 0.3	V
Operating Temp.	T _{opr}	-20	70	°C
Storage Temp.	T _{stg}	-30	80	°C

Electrical Characteristics (V_{DD} =3.3V)

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input High Voltage	V _{IH}	--	2.0	--	V _{DD}	V
Input Low Voltage	V _{IL}	--	0	--	0.8	V
Output High Voltage	V _{OH}	I _{OH} = - 0.1mA	V _{DD} -0.2	--	V _{DD}	V
Output Low Voltage	V _{OL}	I _{OL} = 0.1mA	0	--	0.2	V
Supply Current	I _{DD}	V _{DD} = 5.0V	--	1.0	1.5	mA
LCD Driving Voltage	V _{LCD} -V _{SS}	T _a =25°C	--	15.2	--	V

LED Backlight Specifications (T_a=25 C)

Item	Symbol	Typ.	Max.	Unit
Forward Voltage	V _f	3.1	3.3	V
Forward Current	I _f	90	—	mA
LED Color	White			

INSPECTION CRITERIA

Acceptable Quality Level

Each lot should satisfy the quality level defined as follows

Partition	AQL	Definition
A. Major	0.4%	Functional defective as product
B. Minor	1.5%	Satisfy all functions as product but not satisfy cosmetic standard

Definition of Lot

One lot means the delivery quantity to customer at one time.

Condition of Cosmetic Inspection

INSPECTION AND TEST

- FUNCTION TEST
- APPEARANCE INSPECTION
- PACKING SPECIFICATION

INSPECTION CONDITION




- Put under the lamp (20W) at a distance 100mm from
- Tilt upright 45 degree by the front (back) to inspect Panel appearance.

AQL INSPECTION LEVEL

- SAMPLING METHOD: MIL-STD-105D
- SAMPLING PLAN: SINGLE
- MAJOR DEFECT: 0.4% (MAJOR)
- MINOR DEFECT: 1.5% (MINOR)
- GENERAL LEVEL: II/NORMAL

Module Cosmetic Criteria

No.	Item	Judgment Criterion	Partition
1	Difference in Spec.	None allowed	Major
2	Pattern Peeling	No substrate pattern peeling and floating	Major
3	Soldering Defects	No soldering missing	Major
		No soldering bridge	Major
		No cold soldering	Minor
4	Resist Flaw on Substrate	Invisible copper foil(0.5mm or more)on substrate pattern	Minor
5	Accretion of Metallic Foreign Matter	No soldering dust	Minor
		No accretion of metallic foreign matters(Not exceed 0.2mm)	
6	Stain	No stain to spoil cosmetic badly	Minor
7	Plate Discoloring	No plate fading, rusting and discoloring	Minor

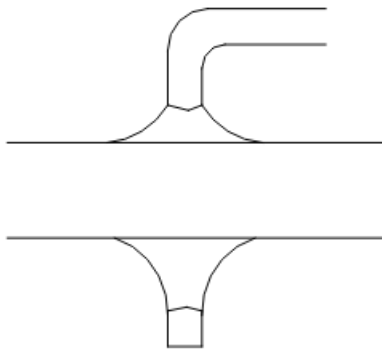
8	Solder Amount 1. Lead Parts	<p>a. Soldering side of PCB</p> <p>Solder to form a 'Filet' all around the lead. Solder should not hide the lead form.</p>  <p>b. Components side</p> <p>(In case of 'Through Hole PCB') Solder to reach the Components side of PCB</p>	Minor
	2. Flat Packages	<p>Either 'toe' (A) or 'heel' (B) of the lead to be covered by Filet</p>  <p>Lead form to be assumed over solder.</p>	Minor
	3. Chips	<p>$(3/2) H \geq h \geq (1/2) H$</p> 	Minor

9	Backlight Defects	1. Light fails or flickers.(Major) 2. Color and luminance do not correspond to specifications. (Major) 3. Exceeds standards for display's blemishes, foreign matter, dark lines or scratches.(Minor)	See list ←
10	PCB Defects	Oxidation or contamination on connectors.* 2. Wrong parts, missing parts, or parts not in specification.* 3.Jumpers set incorrectly.(Minor) 4.Solder(if any)on bezel, LED pad, zebra pad, or screw hole pad is not smooth.(Minor) *Minor if display functions correctly. Major if the display fails.	See list ←
11	Soldering Defects	1. Unmelted solder paste. 2. Cold solder joints, missing solder connections, or oxidation.* 3. Solder bridges causing short circuits.* 4. Residue or solder balls. 5. Solder flux is black or brown. *Minor if display functions correctly. Major if the display fails.	Minor

Screen Cosmetic Criteria (Non-Operating)

No .	Defect	Judgment Criterion		Partition
1	Spots	In accordance with Screen Cosmetic Criteria (Operating) No.1.		Minor
2	Lines	In accordance with Screen Cosmetic Criteria (Operation) No.2.		Minor
3	Bubbles in Polarizer			Minor
		Size: d mm	Acceptable Qty in active area	
		d≤0.3 0.3<d≤1.0	Disregard 3	
		1.0<d≤1.5	1	
		1.5<d	0	
4	Scratch	In accordance with spots and lines operating cosmetic criteria, When the light reflects on the panel surface, the scratches are not to be remarkable.		Minor
5	Allowable density	Above defects should be separated more than 30mm each other.		Minor
6	Coloration	Not to be noticeable coloration in the viewing area of the Graphic panels . Back-lit type should be judged with back-lit on state only.		Minor
7	Contamination	Not to be noticeable.		Minor

Screen Cosmetic Criteria (Operating)

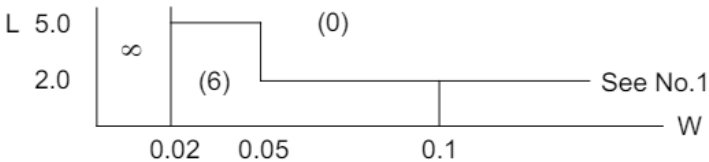No.	Defect	Judgment Criterion		Partition
1	Spots	A) Clear		Minor
		Size:d mm	Acceptable Qty in active area	
		$d\leq0.1$	Disregard	
		$0.1<d\leq0.2$	6	
		$0.2<d\leq0.3$	2	
		$0.3<d$	0	
		Note: Including pin holes and defective dots which must be within one pixel Size. Unclear		
		Size:d mm	Acceptable Qty in active area	
		$d\leq0.2$	Disregard	
		$0.2<d\leq0.5$	6	
		$0.5<d\leq0.7$	2	
		$0.7<d$	0	
2	Lines	A) Clear		Minor
				


Note: () – Acceptable Qty in active area

L - Length (mm)

W -Width(mm)

∞-Disregard


B) Unclear

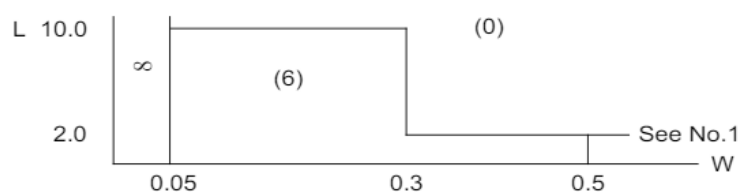

Clear' = The shade and size are not changed by Vo.

Unclear' = The shade and size are changed by Vo.

No.	Defect	Judgment Criterion	Partition
3	Rubbing line	Not to be noticeable.	Minor
4	Allowable density	Above defects should be separated more than 10mm each other.	Minor
5	Rainbow	Not to be noticeable.	Minor
6	Dot size	To be 95%~105%of the dot size (Typ.) in drawing. Partial defects of each dot (ex.pin-hole) should be treated as spot. (see Screen Cosmetic Criteria (Operating) No.1)	Minor
7	Brightness (only back-lit Module)	<p>Brightness Uniformity must be $B_{MAX}/B_{MIN} \leq 2$</p> <ul style="list-style-type: none"> – BMAX: Max. value by measure in 5 points – BMIN : Min.value by measure in 5 points <p>Divide active area into 4 vertically and horizontally. Measure 5 points shown in the following figure.</p>	Minor

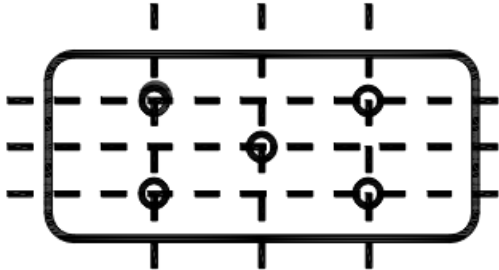8	Contrast Uniformity	<p>Contrast Uniformity must be $B_{MAX}/B_{MIN} \leq 2$</p> <p>Measure 5 points shown in the following figure.</p> <p>Dashed lines divide active area into 4 vertically and horizontally. Measuring points are located at the inter-sections of dashed line.</p>  <p>Note: B_{MAX} – Max.value by measure in 5 points. B_{MIN} – Min.value by measure in 5 points. O – Measuring points in 10mm.</p>	Minor
<p>Note:</p> <p>(1) Size: $d = (\text{long length} + \text{short length})/2$</p> <p>(2) The limit samples for each item have priority.</p> <p>(3) Complexed defects are defined item by item, but if the number of defects is defined in above table, the total number should not exceed 10.</p>			

Operating Precautions

- DO NOT plug or unplug Surenoo module when the system is powered up.
- Minimize the cable length between Surenoo module and host MPU.
- For models with backlights, do not disable the backlight by interrupting the HV line. Unload inverters produce voltage extremes that may arc within a cable or at the display.
- Operate Surenoo module within the limits of the modules temperature specifications.

Mechanical/Environmental Precautions

- Improper soldering is the major cause of module difficulty. Use of flux cleaner is not recommended as they may seep under the electrometric connection and cause display failure.
- Mount Surenoo module so that it is free from torque and mechanical stress.
- Surface of the Graphic panel should not be touched or scratched. The display front surface is an easily scratched, plastic polarizer. Avoid contact and clean only when necessary with soft, absorbent cotton

dampened with petroleum benzene.

- Always employ anti-static procedure while handling Surenoo module.
- Prevent moisture build-up upon the module and observe the environmental constraints for storage tem
- Do not store in direct sunlight
- If leakage of the liquid crystal material should occur, avoid contact with this material, particularly ingestion. If the body or clothing becomes contaminated by the liquid crystal material, wash thoroughly with water and soap.

Storage Precautions

When storing the Graphic modules, avoid exposure to direct sunlight or to the light of fluorescent lamps. Keep Surenoo modules in bags (avoid high temperature / high humidity and low temperatures below 0 °C. Whenever possible, Surenoo G raphic modules should be stored in the same conditions in which they were shipped from our company.

Others

Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subject to a low temperature. If Surenoo G raphic modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability. To minimize the performance degradation of the Graphic modules resulting from destruction caused by static electricity etc., exercise care to avoid holding the following sections when handling the modules.

- Exposed area of the printed circuit board.
- Terminal electrode sections.

In case of 'concentration', even the spots or the lines of 'disregarded' size should not be allowed. Following three situations should be treated as 'concentration'.

- 7 or over defects in circle of 5mm.
- 10 or over defects in circle of 10mm
- 20 or over defects in circle of 20mm

PRECAUTIONS FOR USING

Handling Precautions

- This device is susceptible to electrostatic discharge (ESD) damage. Observe Anti-Static precautions.
- Surenoo display panel is made of glass. Do not subject it to a mechanical shock by dropping it or impact.
- If Surenoo display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.
- Do not apply excessive force to the Surenoo display surface or the adjoining areas since this may cause the color tone to vary.
- The polarizer covering the Surenoo display surface of the Graphic module is soft and easily scratched. Handle this polarizer carefully.
- If Surenoo display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry

cloth. If it is heavily contaminated, moisten cloth with one of the following Isopropyl or alcohol.

- Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the Water.
- Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- Install the Surenoo Graphic Module by using the mounting holes. When mounting the Graphic module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the cable or the backlight cable.
- Do not attempt to disassemble or process Surenoo Graphic module.
- NC terminal should be open. Do not connect anything.
- If the logic circuit power is off, do not apply the input signals.
- To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Be sure to ground the body when handling Surenoo Graphic modules.
 - Tools required for assembling, such as soldering irons, must be properly grounded.
 - To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions.
 - The Graphic module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.

Power Supply Precautions

- Identify and, at all times, observe absolute maximum ratings for both logic and LC drivers. Note that there is some variance between models.
- Prevent the application of reverse polarity to VDD and VSS, however briefly.
- Use a clean power source free from transients. Power-up conditions are occasionally jolting and may exceed the maximum ratings of Surenoo modules.

The VDD power of Surenoo module should also supply the power to all devices that may access the display. Don't allow the data bus to be driven when the logic supply to the module is turned off.

USING Graphic MODULES

Liquid Crystal Display Modules

Surenoo Display is composed of glass and polarizer. Pay attention to the following items when handling.

- Please keep the temperature within the specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.
- Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.).
- N-hexane is recommended for cleaning the adhesives used to attach front/rear polarizers and reflectors made of organic substances which will be damaged by chemicals such as acetone, toluene, ethanol and isopropyl alcohol.
- When Surenoo display surface becomes dusty, wipe gently with absorbent cotton or other soft material like chamois soaked in petroleum benzine. Do not scrub hard to avoid damaging the display surface.
- Wipe off saliva or water drops immediately, contact with water over a long period of time may cause

deformation or color fading.

- Avoid contacting oil and fats.
- Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizers. After products are tested at low temperature they must be warmed up in a container before coming in contact with room temperature air.
Do not put or attach anything on Surenoo display area to avoid leaving marks on.
- Do not touch the display with bare hands. This will stain the display area and degrade insulation between terminals (some cosmetics are determined to the polarizers).
- As glass is fragile. It tends to become or chipped during handling especially on the edges. Please avoid dropping.

Installing Graphic Modules

- Cover the surface with a transparent protective plate to protect the polarizer and LC cell.
- When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual specifications for measurements. The measurement tolerance should be ± 0.1 mm.

Precaution for Handling Graphic Modules

Since Surenoo LCM has been assembled and adjusted with a high degree of precision; avoid applying excessive shocks to the module or making any alterations or modifications to it.

- Do not alter, modify or change the shape of the tab on the metal frame.
- Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
- Do not damage or modify the pattern writing on the printed circuit board.
- Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.
- Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
- Do not drop, bend or twist LCM.

Electro-Static Discharge Control

Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC.

- Make certain that you are grounded when handling LCM.
- Before remove LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential.
- When soldering the terminal of LCM, make certain the AC power source for the soldering iron does not leak.
- When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.
- As far as possible make the electric potential of your work clothes and that of the work bench the ground potential.

- To reduce the generation of static electricity be careful that the air in the work is not too dried. A relative humidity of 50%-60% is recommended.

Precaution for Soldering to Surenoo LCM

- Observe the following when soldering lead wire, connector cable and etc. to the LCM.
 - Soldering iron temperature : $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$
 - Soldering time: 3-4 sec.
 - Solder: eutectic solder.

If soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation. (This does not apply in the case of a non-halogen type of flux.) It is recommended that you protect the Panel surface with a cover during soldering to prevent any damage due to flux spatters.

- When soldering the electroluminescent panel and PC board, the panel and board should not be detached more than three times. This maximum number is determined by the temperature and time conditions mentioned above, though there may be some variance depending on the temperature of the soldering iron.
- When remove the electroluminescent panel from the PC board, be sure the solder has completely melted, the soldered pad on the PCs board could be damaged.

Precaution for Operation

- Driving the Surenoo Graphic in the voltage above the limit shortens its life.
- Response time is greatly delayed at temperature below the operating temperature range. However, this does not mean the Panel will be out of the order. It will recover when it returns to the specified temperature range.
- If Surenoo display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then back on.
- Condensation on terminals can cause an electrochemical reaction disrupting the terminal circuit. Therefore, it must be used under the relative condition of 40°C , 50% RH.
- When turning the power on, input each signal after the positive/negative voltage becomes stable

Limited Warranty

Unless agreed between Surenoo and customer, Surenoo will replace or repair any of its Graphic modules which are found to be functionally defective when inspected in accordance with Surenoo Graphic acceptance standards (copies available upon request) for a period of one year from date of shipments. Cosmetic/visual defects must be returned to Surenoo within 90 days of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of Surenoo limited to repair and/or replacement on the terms set forth above. Surenoo will not be responsible for any subsequent or consequential events.

Return Policy

- No warranty can be granted if the precautions stated above have been disregarded. The typical examples of violations are:
 - Broken Graphic glass.
 - PCB eyelet damaged or modified.

- PCB conductors damaged.
- Circuit modified in any way, including addition of components.
- PCB tampered with by grinding, engraving or painting varnish.
- Soldering to or modifying the bezel in any manner.

Module repairs will be invoiced to the customer upon mutual agreement. Modules must be returned with sufficient description of the failures or defects. Any connectors or cable installed by the customer must be removed completely damaging the PCB eyelet's, conductors and terminals

IMAGE STICKING

What is Image Sticking?

If you remain a fixed image on Graphic Display for a long period of time, you may experience a phenomenon called Image Sticking. Image Sticking – sometimes also called “image retention” or “ghosting”- is a phenomenon where a faint outline of a previously displayed image remains visible on the screen when the image is changed. It can occur at variable levels of intensity depending on the specific image makeup, as well as the amount of time the core image elements are allowed to remain unchanged on the screen. In POS applications, for example, a button menu that remains fixed, or in which the “frame” elements (core image) remain fixed and the buttons may change, may be susceptible to image sticking. It is important to note that if the screen is used exclusively for this application, the user may never notice this phenomenon since the screen never displays other content. It is only when an image other than the “retained” image is shown on the screen that this issue becomes evident. Image sticking is different than the “burn-in” effect commonly associated with phosphor-based devices.

What causes Image Sticking?

Image sticking is an intrinsic behavior of Graphic displays due to the susceptibility to the polarization of the interior materials (liquid crystals) when used under static, charged conditions (continuously displaying the same image). The individual liquid crystals in an Graphic panel have unique electrical properties. Displaying a fixed pattern – such as the POS menu described above – over prolonged periods can cause a parasitic charge build-up (polarization) within the liquid crystals which affects the crystals’ optical properties and ultimately prevents the liquid crystal from returning to its normal, relaxed state when the pattern is finally changed. This effect takes place at a cellular level within the Panel, and the effect can cause charged crystal alignment at the bottom or top of a crystal cell in the “z” axis, or even crystal migration to the edges of a cell, again based on their polarity. These conditions can cause image sticking over an entire area, or at boundaries of distinct color change respectively. In either case, when the liquid crystals in the pixels and sub-pixels utilized to display the static image are polarized such that they can not return fully to their “relaxed” state upon deactivation, the result is a faint, visible, retained image on the panel upon presentation of a new, different image. The actual rate of image retention depends on variation factors such as the specific image, how long it is displayed unchanged, the temperature within the panel and even the specific panel brand due to manufacturing differences amongst panel manufacturers.

How to Avoid Image Sticking?

- Try not to operate the Graphic with a “fixed” image on the screen for more than 2 hours.
- If you are operating the monitor in an elevated temperature environment and with a displayed image which is contrary to the recommendations in “For Software Developers” below, image stick can occur in as little as 30 minutes. Adjust your screen saver settings accordingly.
- Power down the unit during prolonged periods of inactivity such as the hours a store is closed or a shift during which the piece of equipment isn’t used.
- Use a screensaver with a black or medium gray background that is automatically set to come on if the device is inactive for more than 5-10 minutes.

- Avoid placing the monitor in poorly ventilated areas or in areas that will create excess heat around the monitor for software developers.
- In defining the icons, buttons, or windows in the screen, try to utilize block patterns instead of distinct lines as borders for dividing the display into distinct areas.
- If it is necessary to display a static image, try to use colors that are symmetric to the middle grey level at the boundary of two different colors, and slightly shift the borders line once in a while.
- Try to utilize medium gray hues for those areas that will have prolonged display times or remain static as other menu elements change.


How to Fix the Image Sticking?

Unlike the usually irreversible “burn-in” effects commonly associated with direct-view phosphor display devices such as CRTs, an image retained on an Graphic display can be reversed – often to a point of total invisibility. However, the severity of the underlying causes (as described above) of the image retained on a specific display, as well as the variation factors (see “For Software Developers” above) under which the retained image was created, will dictate the final level of retention reversal. One way to erase a retained image on a panel is to run the screen (monitor “on”) in an “all black” pattern for 4-6 hours. It is also helpful to do this in an elevated temperature environment of approximately 35° to 50°C. Again, utilizing a dynamic screen saver with an all black background during prolonged idle display periods is a good way to avoid image retention issues.

Is Image Sticking Covered by Surenoo RMA Warranty?

Image stacking is a phenomenon inherent to Graphic Display technology itself, and as such, the occurrence of this “ghosting” effect is considered normal operation by the manufacturers of the Graphic display modules which are integrated into today’s monitor solutions. Surenoo does not warrant any display against the occurrence of image sticking. We strongly advise that you follow the operating recommendations listed above to avoid the occurrence of this phenomenon

Documents / Resources

	<p>Surenoo SLG240128D Graphic LCD Module [pdf] User Manual SLG240128D Graphic LCD Module, SLG240128D, Graphic LCD Module, LCD Module, Module</p>
---	---

References

- [Surenoo Display](#)
- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.