


# Installation Guide



Please use a compatible LED dimmer switch as incompatible LED dimmers may cause lighting failures.

| Brand Name | Model         |   |
|------------|---------------|---|
| Lutron     | DVCL-153PR    | ✓ |
|            | DVCL-153PH    | ✓ |
|            | DVCL-253PH    | ✓ |
|            | MACL-153M     | ✓ |
|            | MACL-153MLH   | ✓ |
|            | MACL-153MR    | ✓ |
|            | MACL-153MH    | ✓ |
|            | SCL-153P      | ✓ |
|            | SCL-153PH     | ✓ |
|            | SCL-153PR-BL  | ✓ |
|            | SCL-153PR-WH  | ✓ |
|            | CTCL-153P     | ✓ |
|            | CTELV-303P-WH | ✓ |
| Leviton    | 06674-722     | ✓ |
|            | 06674-752     | ✓ |
|            | 06674-726     | ✓ |
|            | 06674-P0W     | ✓ |
|            | DSE06-102ELV  | ✓ |
|            | DSL06-ILZ     | ✓ |

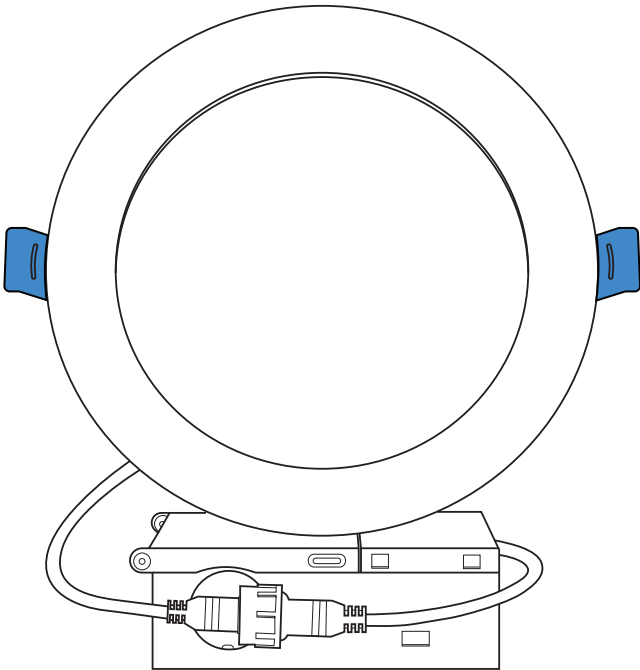


## Ultra-Thin LED Recessed Ceiling Light User Manual

# Installation Guide


## Friendly Remind

- ▶ For your safety, please to wear insulated gloves.
- ▶ Before putting them on the ceiling, please test if they can work.


## Installation Steps




- 1 Turn off the breaker switch for the electrical circuit to the ceiling light. This is very important to be sure of never work with circuits that are energized.
- 2 Mark out the location of each light. Put the template against the ceiling in the desired location and trace around it with a pencil.
- 3 Cut the openings for the lights.




- 4 Run electrical wire from the power source through the mounting hole. Remove the right knockout and insert a connector(1/2 in) into it. Put the wire through the hole.  
(You can buy the connectors from local hardware store.)




- 5 Connect the wire and the junction box, push the wire through the 4 head connectors.
- 6 Tuck the connected wire and close the cover.



- 7 Connect the junction box and the light with the provided male/female connector. Do the connection with the arrow signs on the ends of cable aligned. Screw the cap to protect the connector.



- 8 Insert the J-box through the cut hole in the ceiling.



- 9 Snap the spring clip and mount the light in the opening.
- 10 Turn on the circuit and test the fixture.

## NOTICE

All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. All work should be done by a qualified electrician.

1. Please be sure the power is shut off before process.
2. Keep away from environments where there is a risk of fire or electric shock.
3. Please don't alter, remove any wire and electrical component on the lighting kit. Otherwise, you are responsible for the consequences.