



TASK Power 2700K Lighted Power Strip Instruction Manual

[Home](#) » [TASK power](#) » TASK Power 2700K Lighted Power Strip Instruction Manual 

TASK Power 2700K Lighted Power Strip
Instruction Manual



LIGHTED POWER STRIP

installation instructions


January 2019

Contents

- 1 General Guidelines
- 2 Wiring for Combined Light and Receptacle Circuit – Non Dimmable
- 3 Wiring for Separate Light and Receptacle Circuits
- 4 Wiring Diagram for Combined Light & Receptacle Circuit – Non Dimmable
- 5 Wiring Diagram for Separate Light & Receptacle Circuits
- 6 Documents / Resources
 - 6.1 References


General Guidelines

- Power source MUST be a 20 amp branch circuit protected by a GFCI at the panel or GFCI prior to the connection at LPS.
- All wiring must meet NEC® and local codes.
- Light valance recommended.
- Firmly insert plug straight into receptacle, applying equal pressure to both blades at the same time. Gently rock plug, if needed.

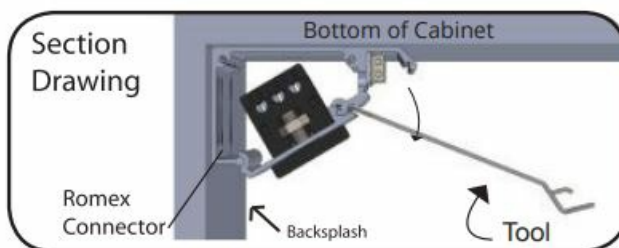

Turn power off at panel. Carefully pry open each piece with tool (provided). Insert Romex connector into knockout hole inside of back frame. Pull wires into LPS.

Wiring for Combined Light and Receptacle Circuit – Non Dimmable

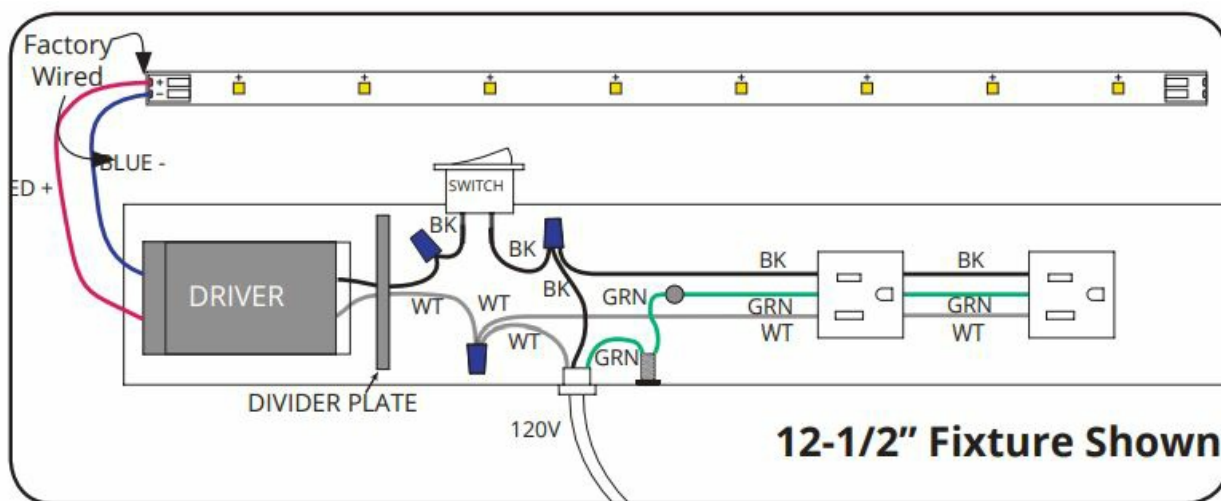


Step 1 Secure LPS to wall by screwing into wall studs or use anchors provided. Connect BLACK Romex wire to BLACK wire from receptacles and switch. Connect WHITE Romex wire to WHITE wire from receptacles and driver. Ground all GREEN wires to PEM studs inside of back frame.

Step 2 When connecting 2 or more LPS fixtures, run Romex from fixture to fixture. Ground each section to the next.

Step 3 To terminate last LPS, use wire nuts on ends of wires.

Step 4 Snap cover in place and turn power on.

Wiring for Separate Light and Receptacle Circuits

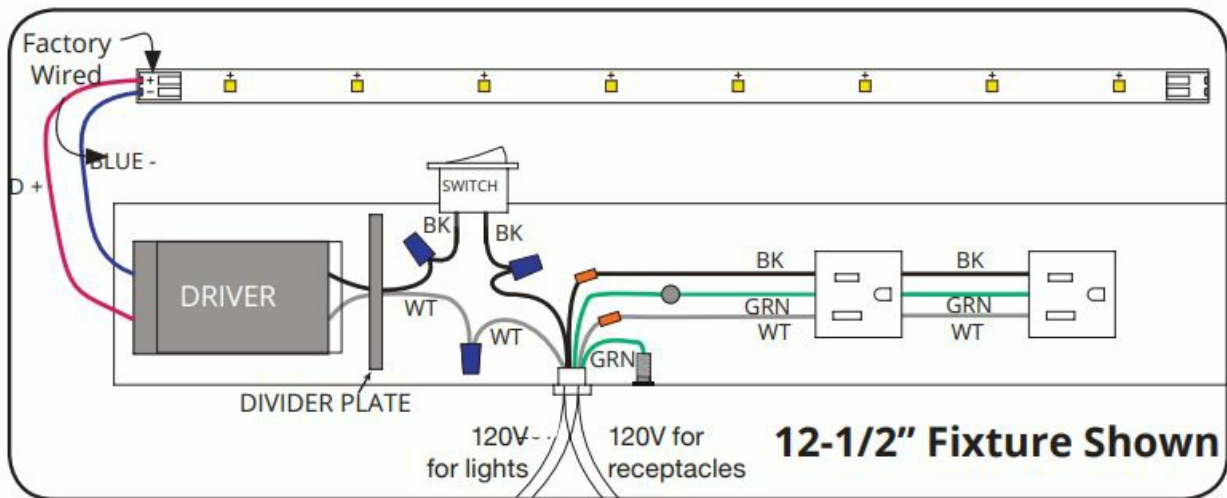


Step 1 Secure LPS to wall by screwing into wall studs or use anchors provided. If running two circuits, one for receptacles, one for lighting, connect fixture wires to appropriate Romex wires. BLACK to BLACK. WHITE to WHITE. Ground all GREEN wires to PEM studs inside of back frame.

Step 2 When connecting 2 or more LPS fixtures, run Romex from fixture to fixture. Ground each section to the next.


Step 3 To terminate last LPS, use wire nuts on ends of wires.

Step 4 Snap cover in place and turn power on.

Wiring Diagram for Combined Light & Receptacle Circuit – Non Dimmable

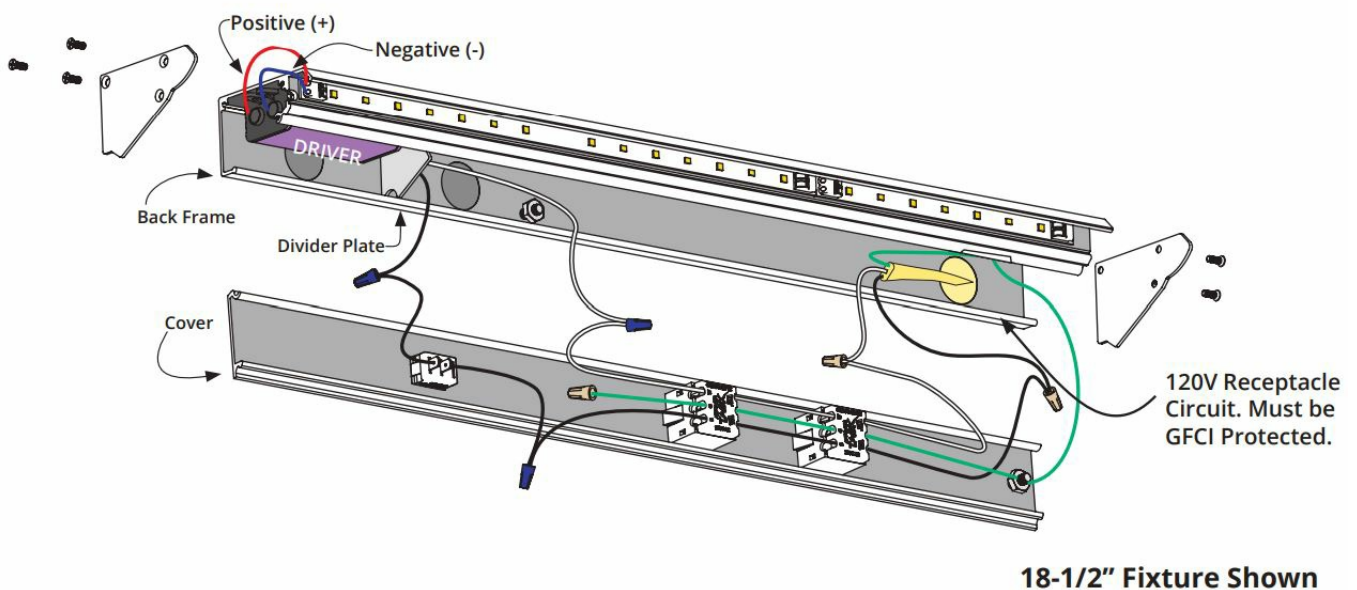


Wiring Diagram for Separate Light & Receptacle Circuits

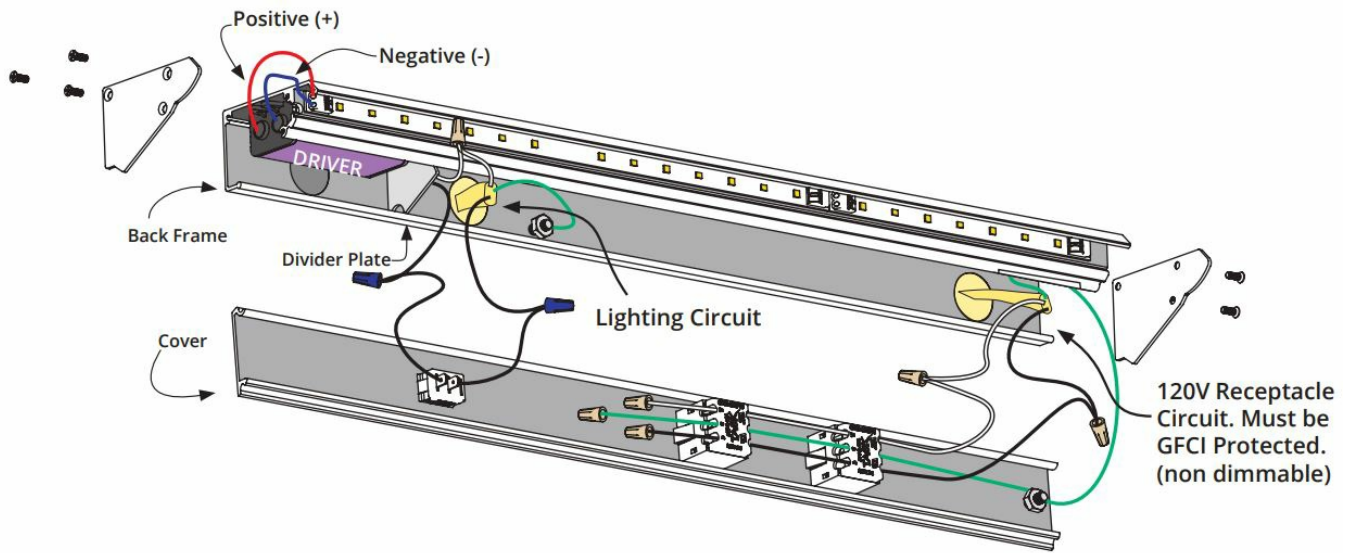



18-1/2" Fixture Shown

General Guidelines

- Power source **MUST** be a 20 amp branch circuit protected by a GFCI at the panel or GFCI prior to the connection at LPS.
- All wiring must meet NEC® and local codes.
- Light valance recommended.
- Firmly insert plug straight into receptacle, applying equal pressure to both blades at the same time. Gently rock plug, if needed.

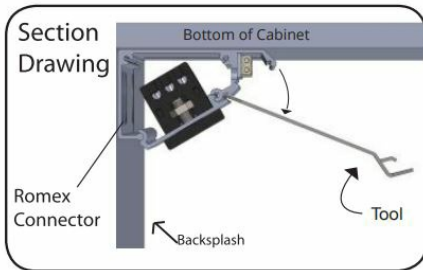

Turn power off at panel. Carefully pry open each piece with tool (provided). Insert Romex connector into knockout hole inside of back frame. Pull wires into LPS.

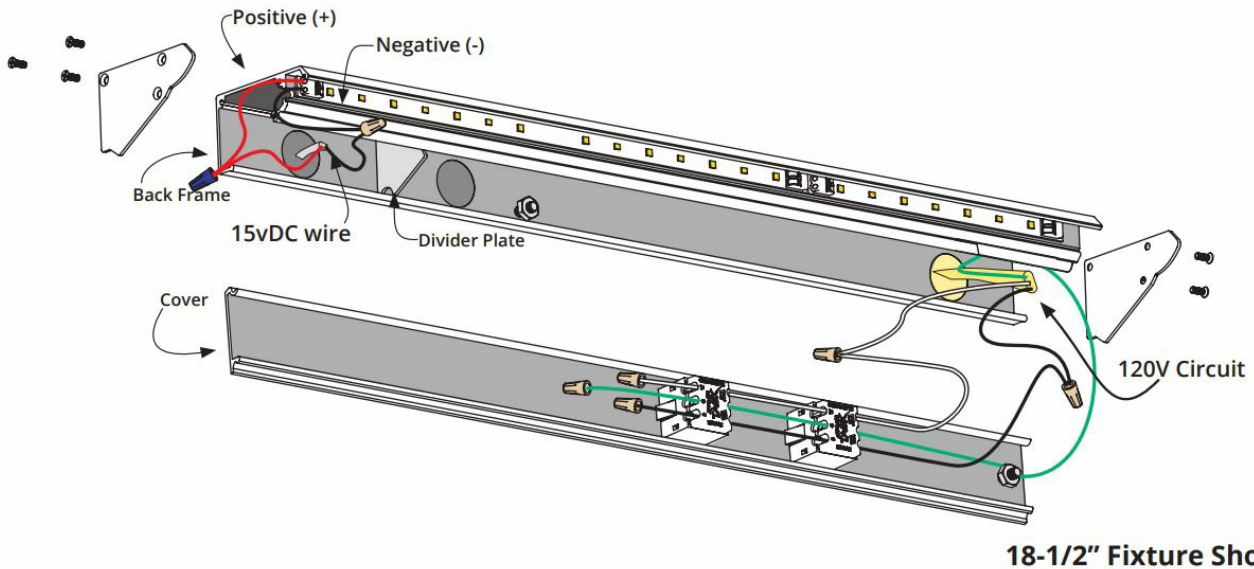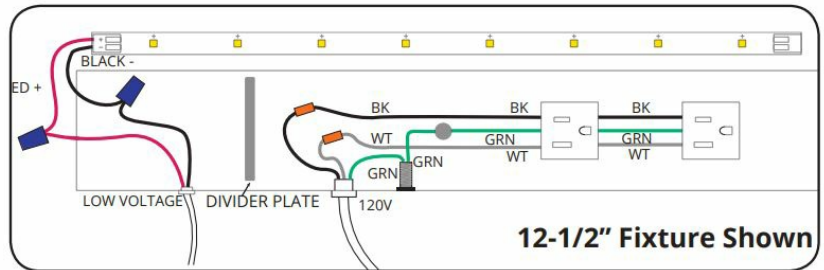

Remote Power Supply- 120V Entry

Step 1 Secure LPS to wall by screwing into wall studs or use anchors provided. Connect BLACK to BLACK, WHITE to WHITE. Ground all GREEN wires to PEM studs inside of back frame.

Step 2 When connecting two LPS, run Romex from fixture to fixture. Ground each section to the next.

Step 3 To terminate last LPS, use wire nuts on ends of wires.


Remote Power Supply-Low Voltage Entry

Step 4 Using appropriate knockout hole, pull low voltage wire from remote power supply into the low voltage space, connect BLACK wire (negative) to BLACK wire from lights and RED wire (positive) to RED wire.

Step 5 Snap cover in place and turn power on.

Customer Service: 800.445.6404 · Design Services/Technical Support: 866.848.9094 · TaskLighting.com

Documents / Resources

	<p>TASK Power 2700K Lighted Power Strip [pdf] Instruction Manual 2700K Lighted Power Strip, 2700K, Lighted Power Strip, Power Strip, Strip</p>
---	---

References

- [🌐 Task Lighting | Task Lighting Under Cabinet | Bathroom Lighting](#)
- [🌐 Task Lighting | Task Lighting Under Cabinet | Bathroom Lighting](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.