



## TERACOM TSM400-1-CP 1 Wire Carbon Dioxide Sensor User Manual

[Home](#) » [TERACOM](#) » TERACOM TSM400-1-CP 1 Wire Carbon Dioxide Sensor User Manual 



control solutions

# TERACOM

TSM400-1-CP 1 Wire Carbon Dioxide Sensor  
User Manual





[www.teracomsystems.com](http://www.teracomsystems.com)

## Contents

- [1 Short description](#)
- [2 Features](#)
- [3 Applications](#)
- [4 Specifications](#)
- [5 Pinout](#)
- [6 Installation](#)
- [7 Status indicator](#)
- [8 Installation tips](#)
- [9 Firmware update](#)
- [10 Recycling](#)
- [11 Documents / Resources](#)
- [12 Related Posts](#)

## Short description

TSM400-1-CP is a multi-parameter sensor that supports the 1-Wire protocol. The sensor measures the concentration of carbon dioxide and atmospheric pressure. Both basic sensor elements, for carbon dioxide and pressure, used in the device are digital. This ensures high measurement accuracy and long-term stability. The basic sensing element for atmospheric pressure is factory calibrated and it does not require any lifetime recalibration. Automatic calibration is available for carbon dioxide measurements. TSH400-1-CP is housed in a slim plastic enclosure. The bottom part of the enclosure is suitable for installation on standard flush-mounted/cavity wall boxes ø68mm, with installation openings on 61mm.

## Features

- LED indicator for status of communication
- Excellent long-term stability
- Firmware update with Teracom controller via the 1-Wire interface


## Applications

- Environmental quality monitoring and assessment for offices
- CO2 pollution monitoring
- Smart ventilation systems

## Specifications

- Physical characteristics  
Dimensions: 81 x 81 x 30 mm  
Weight: 66 g
- Environmental limits  
Operating temperature range: -20 to 60°C  
Operating relative humidity range: 5 to 95% (non-condensing)  
Storage temperature range: -20 to 60°C  
Storage relative humidity range: 5 to 95% (non-condensing)  
Ingress protection: IP20
- Power requirements  
Operating voltage range (including -15/+20% according to IEC 62368-1): 4.5 to 26 VDC  
Current consumption: 25 mA@5VDC (Peak: 150 mA@5VDC)
- CO2 measurements Range: 400 to 5000 ppm  
Accuracy:  $\pm (40 \text{ ppm} + 5 \%)$   
Resolution: 1 ppm  
Calibration: Automatic, if the sensor is exposed to fresh air for more than 30 minutes.
- Pressure measurements Range: 10 to 1200 hPa  
Accuracy (min):  $\pm 1.5$  (25°C, 750 hPa)  
Accuracy (max):  $\pm 2.5$  (-20°C to + 85°C, 300 to 1100 hPa)  
Resolution: 1 hPa
- Warranty period: 3 years


## Pinout

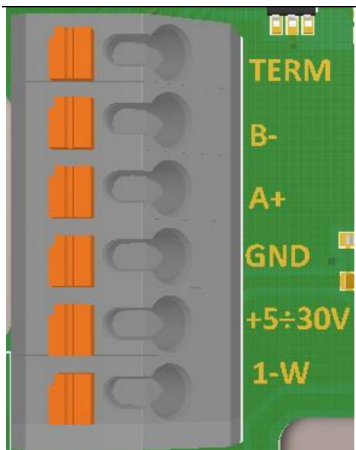	Pin	Description	UTP wires color
	1-W	1-Wire data	Green
	+5+30V	Positive power supply	Orange
	GND	A ground (negative) supply	Green/White tracer Orange/White Tracer
	A+	Not used	
	B-	Not used	
	TERM	Not used	

## Installation

It is strongly recommended to use UTP/FTP cables and daisy-chained (linear) topology for multiple sensors and keep the total cable length up to 30 meters.

**Attention!** Due to the high peak current, only one TSM400-1-CP sensor can be connected to a controller. The length of the cable between the controller and the sensor should not exceed 10 meters. If you want to connect more than one TSM400-1-CP sensor, please contact your supplier for technical guidance.

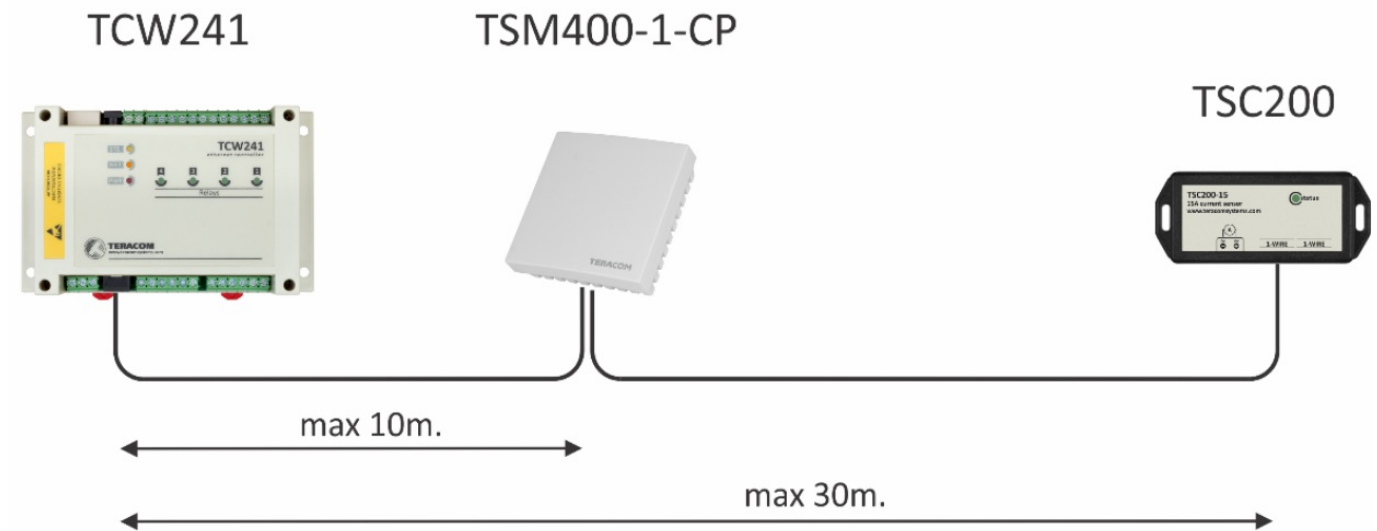

“Star” topology can be used only as a last resort for up to 4 sensors and a total cable length of up to 10 meters.



## Status indicator

The status of the device is shown by a single LED, located inside the box:

- If the LED blinks for a period of 1 second, the sensor works properly;
- If the LED blinks for a period of 3 seconds, there isn't communication with the controller;
- If the LED doesn't blink, there isn't a power supply.


## Installation tips

The location and the mounting position of sensors have a direct effect on the accuracy of the measurements. The tips below will ensure good measuring results:

- The sensor shall be installed about 1.2-1.4 m above the floor;
- To avoid solar radiation, the sensor should not be installed next to windows or directly in the sunlight;
- The sensors shall be installed in a place with sufficient air circulation.

1-Wire is a registered trademark of Maxim Integrated Products, Inc. It is strongly recommended to read Maxim's 1-Wire tips at <http://www.maxim-ic.com/appnotes/index.mvp/id/148>. TSM400-1-CP sensor is intended for installation on a cavity wall box with 68mm diameter and 61 mm screw spacing.

### Firmware update

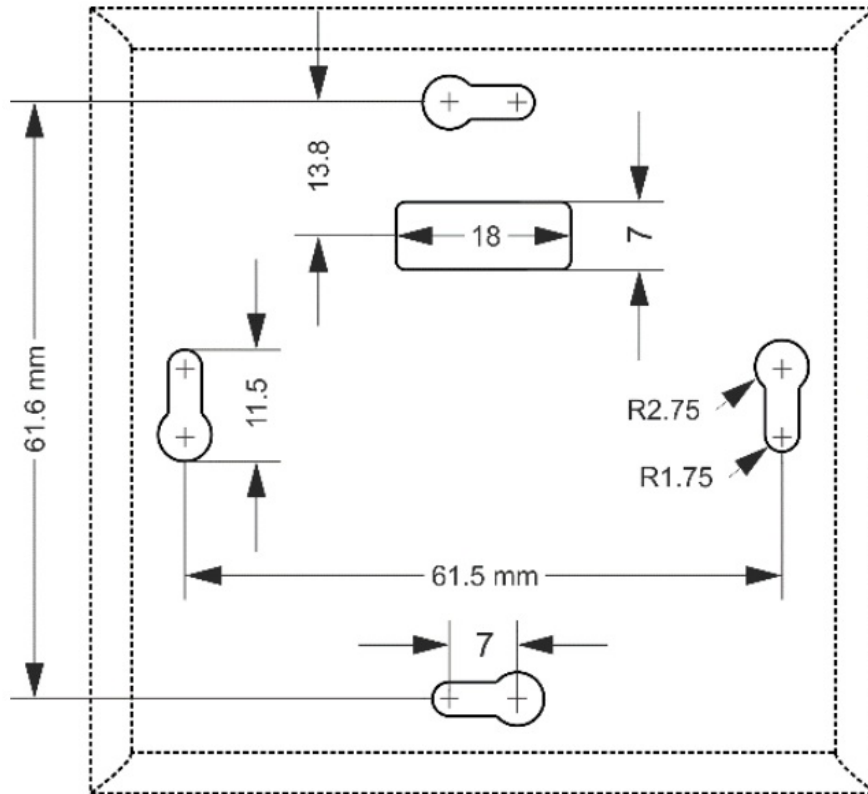

The firmware of the sensor can be updated with any Teracom controller which supports a 1-Wire interface. For more details ask your dealer.

### 10. 1-Wire scratchpad

	SCRATCHPAD	SCRATCHPAD EXAMPLE DATA
BYTE 0	CO2 LSB	OXBO
BYTE 1	CO2 MSB	0X04
BYTE 2	Pressure LSB	OXE3
BYTE 3	Pressure MSB	0X03
BYTE 4	User byte 1	OXFF
BYTE 5	User byte 2	OXFF
BYTE 6	RESERVED	OXFF
BYTE 7	RESERVED	OXFF
BYTE 8	CRC	0X29
CO2		Pressure
Hex value – 0x04B0		Hex value – 0x03E3
Decimal value 1200		Decimal value – 995
Real value -> 1200 ppm		Real value -> 995 hPa

The sub-family code is 0xC9

## Recycling



Recycle all applicable material.






Do not dispose of regular household refuse.

TSM400-1-CP\_R1.0

June 2022

## Documents / Resources

	<p><a href="#"><b>TERACOM TSM400-1-CP 1 Wire Carbon Dioxide Sensor</b></a> [pdf] User Manual TSM400-1-CP, 1 Wire Carbon Dioxide Sensor, TSM400-1-CP 1 Wire Carbon Dioxide Sensor</p>
	<p><a href="#"><b>TERACOM TSM400-1-CP 1 Wire Carbon Dioxide Sensor</b></a> [pdf] User Manual TSM400-1-CP, 1 Wire Carbon Dioxide Sensor, TSM400-1-CP 1 Wire Carbon Dioxide Sensor, Wire Carbon Dioxide Sensor, Carbon Dioxide Sensor, Dioxide Sensor, Sensor</p>
	<p><a href="#"><b>TERACOM TSM400-1-CP 1-Wire Carbon Dioxide Sensor</b></a> [pdf] User Manual TSM400-1-CP, 1-Wire Carbon Dioxide Sensor, Dioxide Sensor, 1-Wire Carbon Sensor, Sensor, Carbon Sensor</p>