

Outdoor Full-Color

Bullet Network Camera

MODEL: VIGI C345 (2.8mm/4mm/6mm)



4MP | H.265+
VIGI C345

Human & Vehicle
Classification

Smart Detection

Active Defense

True WDR


People & Vehicle
Analytics

// Human & Vehicle Classification

Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.



// Smart Detection



Intrusion Detection



Line-Crossing
Detection



Object Removal
Detection



Abandoned Object
Detection




Region Entering
Detection



Region Exiting
Detection



Loitering
Detection




Scene Change
Detection

// VIGI Surveillance Solution


The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

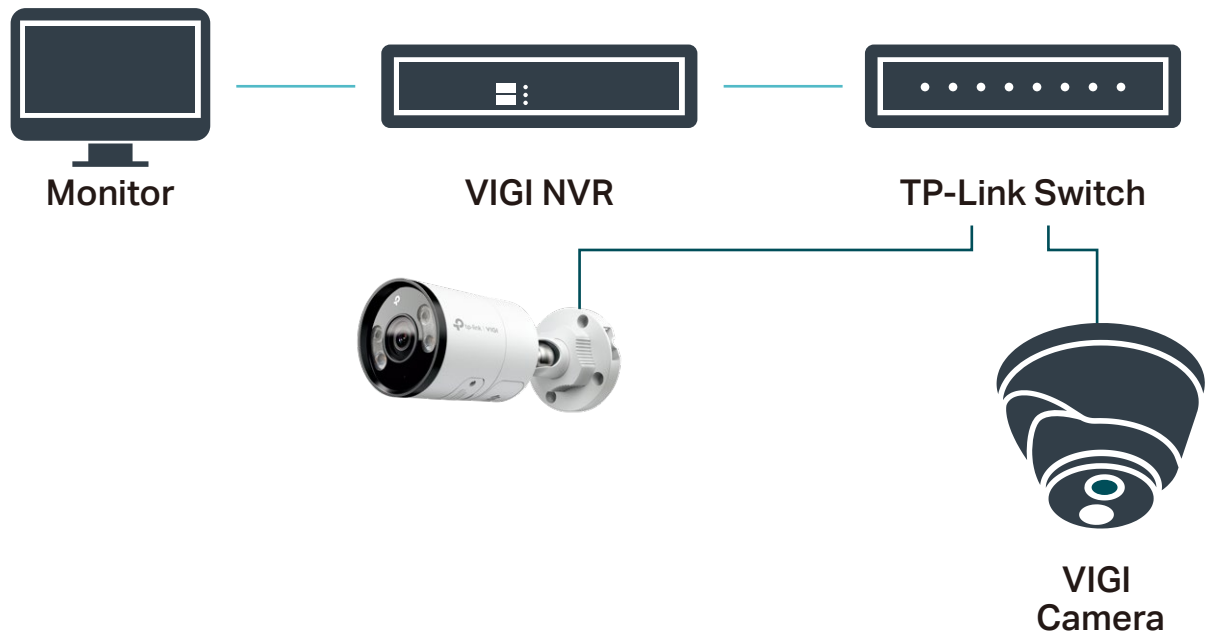

// Flexible Installation

Find the perfect vantage point by simply securing your camera to the ceiling, wall, or pole*.

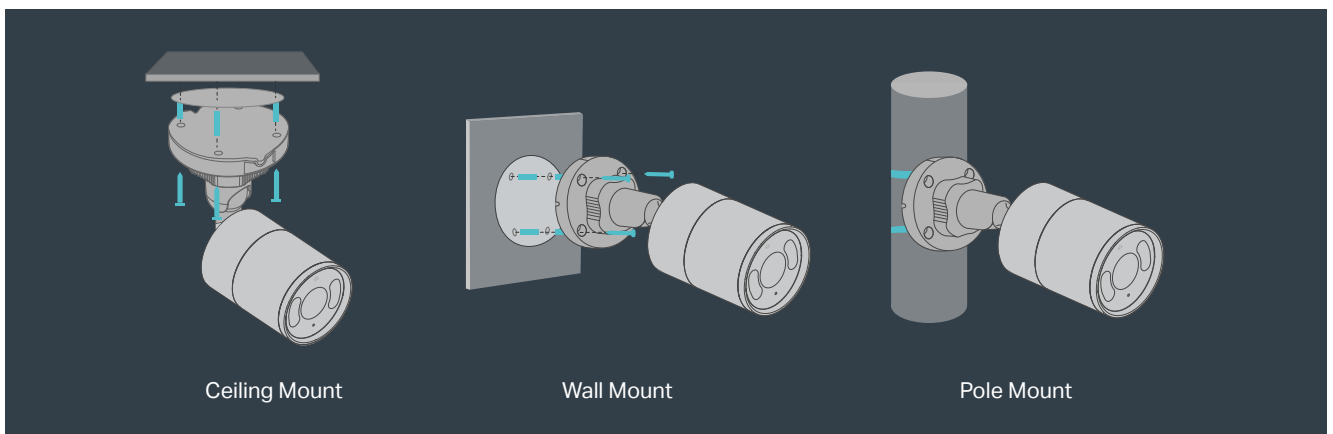


Specifications

| Camera | |
|-----------------------|--|
| Product Model | VIGI C345(2.8mm/4mm/6mm) |
| Image Sensor | 1/2.7" Progressive Scan CMOS |
| Min. Illumination | 0.005 Lux; 0 Lux with IR/White Light |
| Shutter Speed | 1/3 to 1/10000 s |
| Slow Shutter | Yes |
| Day & Night Mechanism | IR Cut Filter |
| Day/Night Switch | Unified/Scheduled/Auto |
| Lens | |
| Type | Fixed Focal Lens |
| Focal Length | 2.8mm/4 mm/6 mm |
| Aperture | F1.6 |
| FOV | <ul style="list-style-type: none"> • 2.8 mm: Horizontal FOV: 100°, Vertical FOV: 54°, Diagonal FOV: 118° • 4 mm: Horizontal FOV: 80.4°, Vertical FOV: 41.8°, Diagonal FOV: 98.7° • 6 mm: Horizontal FOV: 52.7°, Vertical FOV: 29°, Diagonal FOV: 60.8° |
| Lens Mount | M12*P 0.5 |
| DORI Distance | <ul style="list-style-type: none"> • 2.8 mm Detect: 64 m (210 ft) Observe: 27 m (89 ft) Recognize: 13 m (43 ft) Identify: 6 m (20 ft) • 4 mm Detect: 80 m (262 ft) Observe: 33 m (108 ft) Recognize: 16 m (52 ft) Identify: 8 m (26 ft) • 6 mm Detect: 120 m (394 ft) Observe: 50 m (164 ft) Recognize: 24 m (79 ft) Identify: 12 m (39 ft) |
| Illuminator | |
| IR LED | Quantity: 2 Range: 30m Wavelength: 850nm |
| White LED | Quantity: 2 Range: 30m |

| | |
|----------------------------|--|
| Illuminator On/Off Control | Auto/Scheduled/Always on/Always off |
| Video | |
| Max. Resolution | 2688x1520 |
| Main Stream | <ul style="list-style-type: none"> • Frame Rate 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps • Resolution: 2688x1520, 2560x1440, 2304x1296, 2048x1280, 1920x1080, 1280x720 Note: • If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps. |
| Sub-Stream | <ul style="list-style-type: none"> • Frame Rate 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps • Resolution: 2688x1520, 2560x1440, 2304x1296, 2048x1280, 1920x1080, 1280x720 Note: • If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps. |
| Bit Rate Control | CBR, VBR |
| Video Compression | Main stream: H.265/H.265+/H.264/H.264+ Sub-stream: H.265/H.264 |
| Video Bit Rate | <ul style="list-style-type: none"> • Main Stream: 256 Kbps to 6 Mbps • Sub-Stream: 64 Kbps to 512 Kbps |
| Image | |
| Image Settings | Mirror, Brightness, Contrast, Saturation, Sharpness, Exposure, WDR, White Balance, Prevent Overexposure to Infrared Light, HLC Adjustable by Client Software |
| Image Enhancement | BLC/3D DNR/HLC/SmartIR |
| Wide Dynamic Range (WDR) | 120dB Note: When People & Vehicle Analytics is enabled, only DWDR is supported. |
| SNR | ≥ 52 dB |
| Image Parameters Switch | Yes |
| Privacy Mask | Up to 4 Masks |
| ROI | 1 Region |
| OSD Setting | Yes |
| Audio | |
| Audio Communication | Two-way audio |
| Audio Input | Yes |
| Audio Output | Yes |

| | |
|-----------------------------------|--|
| Audio Compression | Yes |
| Audio Sampling Rate | 8KHz |
| Environment Noise Filtering | Yes |
| Audio Bit Rate | 64 Kbps(G.711 alaw) |
| Network | |
| Protocols | TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS |
| API | Open Network Video Interface (Profile S) |
| Web Browser | Google Chrome® 57 and above Firefox® 52 and above Safari® 11 and above Microsoft® Edge 91 and above |
| Security | Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication |
| Simultaneous Live View | 3 Main Streams & 3 Sub-Streams |
| Client | VIGI App, VIGI Security Manager, VIGI NVR, Web,VMS |
| Cloud | Yes |
| ONVIF | Yes |
| Interface | |
| Network Interface | 1 RJ45 10/100M Self-Adaptive Ethernet Port, PoE |
| On-board Storage | Built-In Memory Card Slot, Support MicroSD Card, Up to 256 GB |
| Built-in Speaker | Yes |
| Built-in Microphone | Yes; Records Anything Going on within a 15-ft Radius of the Camera |
| Audio | N/A |
| Alarm | N/A |
| Reset Button | Yes |
| Power | DC Power Port |
| Alarm and Event Management | |
| Smart Event | <ul style="list-style-type: none"> • Human & Vehicle Classification • Intrusion Detection • Line-Crossing Detection • Region Entering Detection • Region Exiting Detection • Object Abandoned Detection • Object Removal Detection • Loitering Detection • Smart Frame • People Detection • Vehicle Detection |
| Basic Event | <ul style="list-style-type: none"> • Motion Detection • Video Tampering Detection • Exception (Illegal Login) • Scene Change Detection |
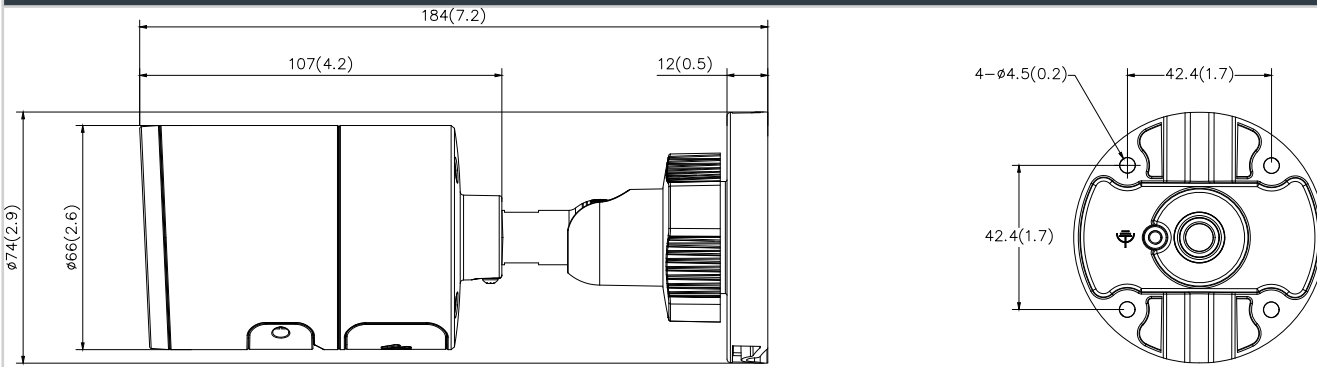
| | |
|--|--|
| Alarm Linkage | <ul style="list-style-type: none"> • Memory Card Video Recording • Message Push • Audible Warning • White Light Flashing |
| Linkage Method | N/A |
| Output Notification | Message Push |
| Deep Learning Function | |
| People & Vehicle Analytics | Search and filter to people or vehicle of interest based on many different attributes, making post-event search faster and easier. |
| General | |
| Operating Temperature | -30–60 °C |
| Storage Temperature | -40–60 °C |
| Operating Humidity | 95% or Less (Non-condensing) |
| Storage Humidity | 95% or Less (Non-condensing) |
| Power Supply | <ul style="list-style-type: none"> • 12V DC \pm 5%, Max. 9.7 W, 5.5 mm Coaxial Power Plug • PoE: 802.3af/at, class 0, Max. 10.7 W |
| Material | Metal |
| Protection | IP67 |
| Product Dimensions (L x W x H) | 74*74*184mm |
| Package Contents | VIGI Network Camera Quick Start Guide Waterproof Cable Attachments Mounting Accessories |
| Net Weight | 0.525 Kg |
| Certifications | CE, NTRA, VCCI, KC, BSMI, FCC, IC |
| Dimensions | |
|  <p>The technical drawing includes two views of the camera. The side view on the left shows a total length of 184(7.2) mm, a main body length of 107(4.2) mm, and a mounting bracket width of 12(0.5) mm. The diameter of the main body is 74(2.9) mm, and the diameter of the mounting bracket is 66(2.6) mm. The top view on the right shows a square mounting bracket with a side length of 42.4(1.7) mm. It features four mounting holes, each with a diameter of 4.5(0.2) mm, arranged in a square pattern.</p> | |

*Pole mounting kits and SD card are not included in the package.

Specifications are subject to change without notice and can be found at www.tp-link.com.

©2023 TP-Link