



thdstatic Multiple Pendant Light Instruction Manual

[Home](#) » [thdstatic](#) » thdstatic Multiple Pendant Light Instruction Manual 

Contents

- 1 thdstatic Multiple Pendant Light
- 2 INSTRUCTION MANUAL
- 3 HEIGHT ADJUSTMENT
- 4 STEP-BY-STEP INSTALLATION
- 5 After-sales Service
 - 5.1 Warranty
- 6 Documents / Resources

thdstatic

thdstatic Multiple Pendant Light



INSTRUCTION MANUAL

The installer and/or user must read, understand and follow these instructions before installing the product. This product must be properly installed before it is used. If instructions are not followed, the manufacturer will not be held responsible for any problems or product malfunction.

Failure to follow installation and/or operating instructions voids the warranty. We recommend that this product be installed by a certified electrician. In some states or provinces, it is a legal requirement for this type of product to be installed by a certified electrician, according to the electrical and building codes effective in the region where the unit is used.

WARNING:

- Risk of electrical shock. Turn off breaker at the panel.
- Switch off the main electrical supply from the fuse box/circuit breaker before installing the unit or doing any maintenance.
- Do not use outdoor. Residential use only. Indoor use only

HEIGHT ADJUSTMENT

NOTE: It is recommended to make any major adjustments to the height of the light fixture before installation.

1. With the power off, measure the distance from the ceiling to the bottom of where you would like your light fixture to hang.
2. To retract the wire, gently push it into the light fixture base (fig. 1).
3. To extend the wire, push the metal collar while gently pulling the wire down (fig. 2). When the metal collar is released, the wire will be fixed into position.
4. Turn the fixture over and slide the plastic wire retainer up to the wire nut, to prevent the pendant from slipping down when in use. Once the wire is at the desired length, turn the

fig. 1


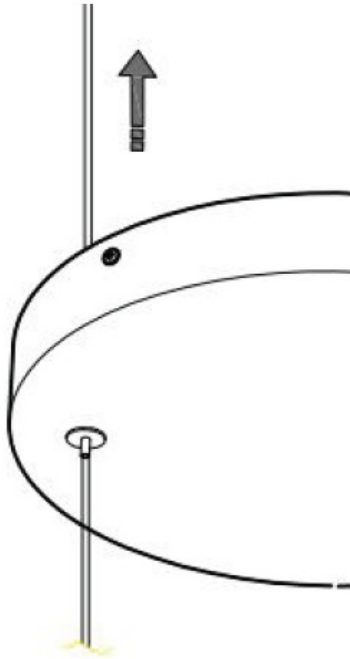


fig. 2

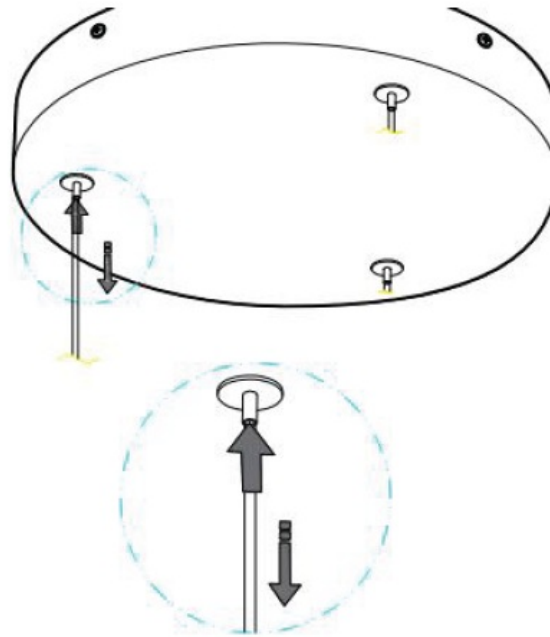

WARNING: Risk of electrical shock. Turn off breaker at the panel.

STEP-BY-STEP INSTALLATION

1. Turn off power at the circuit breaker and the light switch. Ensure the power is off before continuing.
2. Attach the mounting bracket to the junction box with the two junction box screws. Ensure the screws attached to the mounting bracket point away from the junction box (fig. 3).
3. Connect the white wire (N) from the light fixture to the white supply wire (N) from the junction box using a wire connector. Connect the black wire (L) from the light fixture to the black supply wire (L) from the junction box using a wire connector. Connect the ground wire (G) from the light fixture to the ground supply wire (G) from the junction box using a wire connector (fig. 4).
4. Put the wires into the canopy.
5. Mount the canopy onto the mounting bracket and secure it

fig. 3


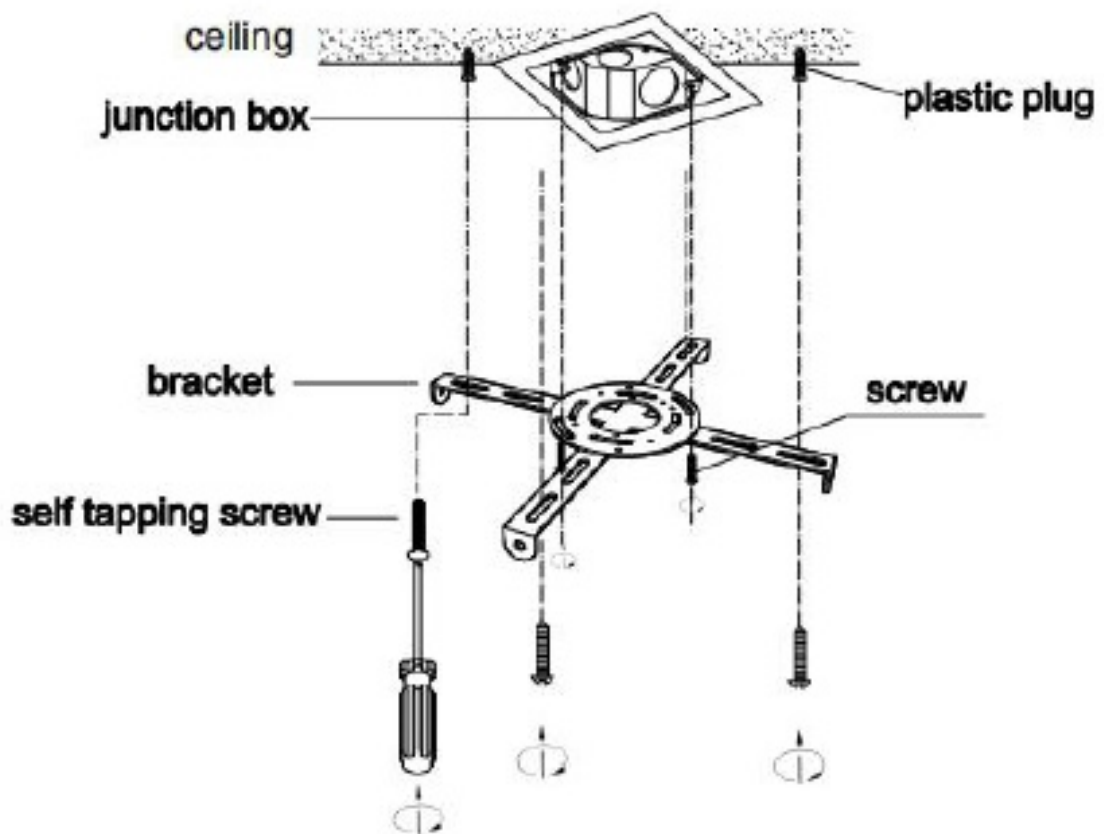


fig. 4

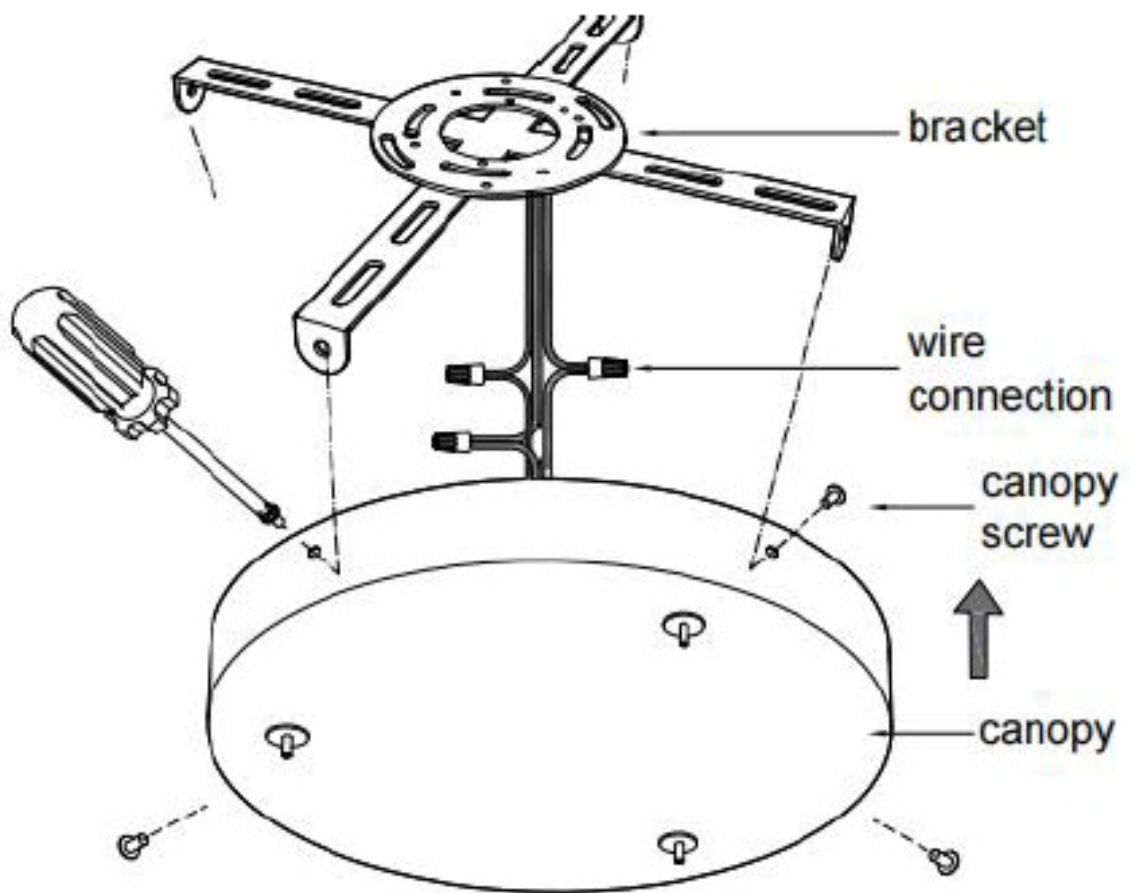

Warranty

Thank you for choosing JoollySun lighting. Our after-sales team would be glad to offer our top after-sales services to all our valued customers.

In case of a defect product and to deliver worry free products, we offer a limited warranty for different products. All JoollySun pendant light series enjoy a three-year warranty.

What does this warranty cover?

It covers any defects in material. It covers any defects in workmanship under normal use.

If a defect in materials or workmanship appears in our products, we will provide, at your choice, either free repair of the product, free replacement of the same model number components or a complete refund of the original purchase price.

2. What will we do to correct our problems?

We will repair the product at no cost if the product is still under warranty. We will repair any broken parts of the product using new or replacement parts.

We will exchange the defect product with a new one for free.

We will offer a complete refund of the original purchase price.

3. What do you need to do?

To obtain warranty services, you must first contact us to determine the problem and the most appropriate solution for you. The product must be in its original packaging or the customer can send it in any package.

Any documents or accessories that shipped with the product must be included in the package.

Please don't hesitate to contact us if you have any further questions.

Customer service: support@joollysun.com

Documents / Resources

<div><p>WARNING: READ CAREFULLY INSTRUCTION MANUAL IMPORTANT: READ CAREFULLY PLEASE READ CAREFULLY</p><p>The product must be used in accordance with the instructions in this manual. It is a high-voltage product and must be handled with care. It is not to be used in wet areas or near water. It is not to be used in areas where it may be exposed to rain or moisture. It is not to be used in areas where it may be exposed to dust or dirt. It is not to be used in areas where it may be exposed to oil or grease. It is not to be used in areas where it may be exposed to chemicals or other hazardous substances. It is not to be used in areas where it may be exposed to fire or heat. It is not to be used in areas where it may be exposed to vibration or shock. It is not to be used in areas where it may be exposed to any other conditions that may be hazardous to the product or to the user.</p><p>HEIGHT ADJUSTMENT To adjust the height of the product, please refer to the instructions in the manual. It is not to be adjusted in areas where it may be hazardous to the product or to the user.</p></div>	<p>thdstatic Multiple Pendant Light [pdf] Instruction Manual Multiple Pendant Light, Pendant Light, Light</p>
--	---