



The Retro Web Q Logic PCI-D Card Instructions

[Home](#) » [The Retro Web](#) » The Retro Web Q Logic PCI-D Card Instructions 

Contents

- [1 The Retro Web Q Logic PCI-D Card](#)
- [2 CONNECTIONS](#)
- [3 SCSI TERMINATION](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)




The Retro Web Q Logic PCI-D Card



- **Chipset** QLogic ISP-1020

- **Maximum Onboard Memory** 128KB SRAM
- **Data Bus** 32-bit PCI
- **Card Size** Full height, half length
- **Hard Drives Supported** Up to 15 SCSI-2 Fast/Wide Differential devices
- **Floppy Drives Supported** None

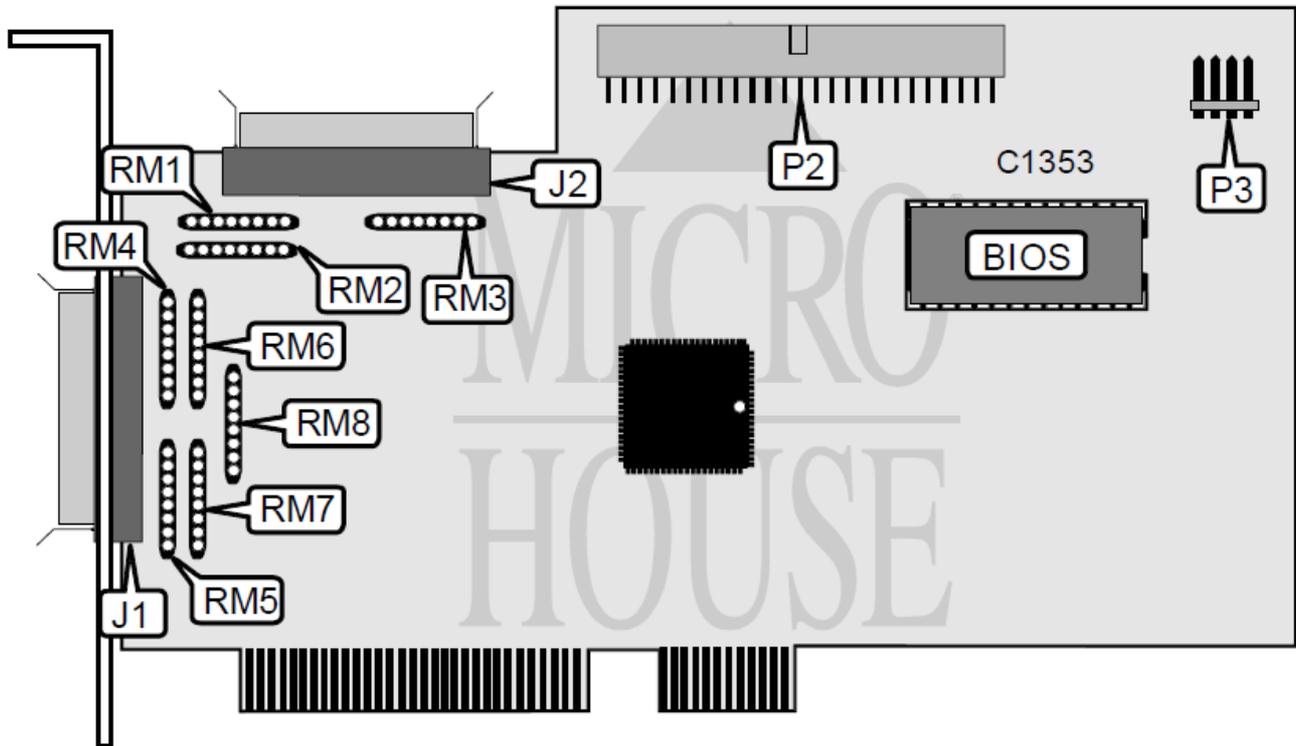

CONNECTIONS


CONNECTIONS			
Function	Label	Function	Label
68-pin SCSI-2 connector – external	J1	50-pin SCSI-2 connector – internal	P2
68-pin SCSI-2 connector – internal	J2	drive active LED	P3

SCSI TERMINATION

SCSI TERMINATION						
J1	J2	P2	RM1	RM2	RM3	RM4
Used	Not used	Not used	Installed	Installed	Installed	Installed
8-bit SCSI	Used	Not used	Installed	Installed	Installed	Not installed
16-bit SCSI	Used	Not used	Not installed	Not installed	Not installed	Not installed
16-bit SCSI	Not used	Used	Installed	Installed	Installed	Not installed
Not used	Used	Not used	Installed	Installed	Installed	Installed
Not used	Used	Used	Installed	Installed	Installed	Not installed
Not used	Not used	Used	Installed	Installed	Installed	Installed

J1	J2	P2	RM5	RM6	RM7	RM8
Used	Not used	Not used	Installed	Installed	Installed	Installed
8-bit SCSI	Used	Not used	Not installed	Not installed	Not installed	Not installed
16-bit SCSI	Used	Not used	Not installed	Not installed	Not installed	Not installed
16-bit SCSI	Not used	Used	Not installed	Not installed	Not installed	Not installed
Not used	Used	Not used	Installed	Installed	Installed	Installed
Not used	Used	Used	Not installed	Not installed	Not installed	Not installed
Not used	Not used	Used	Installed	Installed	Installed	Installed

Documents / Resources

	<p>The Retro Web Q Logic PCI-D Card [pdf] Instructions ISP-1020, Q Logic PCI-D Card, Q Logic Card, PCI-D Card, Q Logic, PCI-D, Q Logic PCI-D</p>
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.