



TOBENONE UDS030 Docking Station User Manual

[Home](#) » [TOBENONE](#) » TOBENONE UDS030 Docking Station User Manual 



**UDS030 Docking Station
User Manual**



Contents

- 1 UDS030 Docking Station
- 2 Ports and connectors
- 3 Dual 4k Extended Monitors Configuration
- 4 USB-C DP Alt Mode (DP 1.2HBR21)
- 5 Documents / Resources
- 6 Related Posts

UDS030 Docking Station


Free Warranty Extended

Register your product for a FREE upgrade to a 24-Month Warranty: <https://tobenone.com/warranty>

THANK YOU!

Thank you for purchase of Tobenone USB C dual 4K@60Hz Dock UDS-030! Our dock provides the ability to connect up to two 4K@60Hz displays, RJ45 Gigabit Ethernet, audio input and output, 8 USB peripherals and SD/TF slot to your USB C laptop via one USB C cable.

Ports and connectors

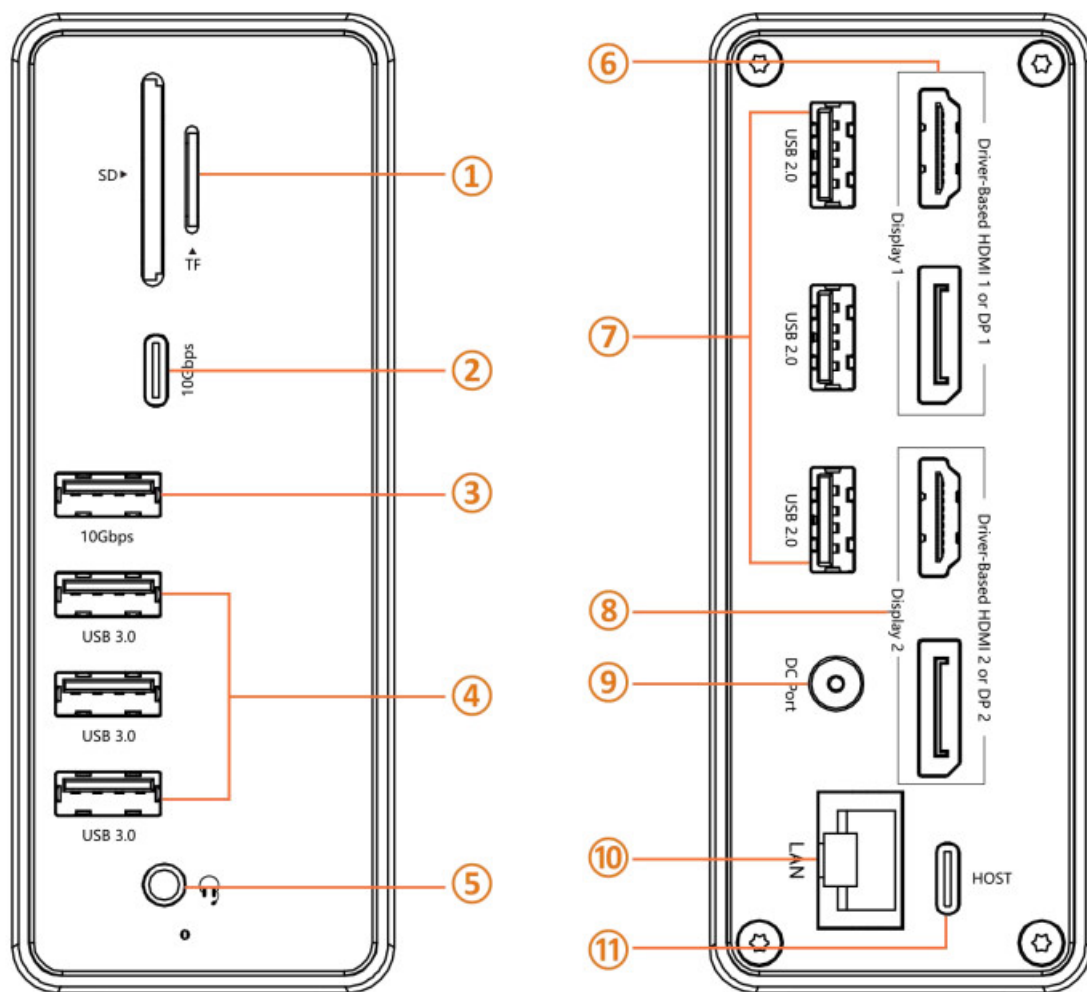

- 1. SD/TF: Support simultaneous reading
- 2. USB C 3.1: Speed up to 10Gbps
- 3. USB A 3.1: Speed up to 10Gbps
- 4. USB A 3.0: Speed up to 5Gbps

5. 3.5mm Audio/Microphone
6. Display 1: HDMI 1 or DP 1 resolution up to 4K@60Hz(driver-based)
7. USB A 2.0: Special for wireless devices
8. Display 2: HDMI 2 or DP 2 resolution up to 4K@60Hz(driver-based)
9. DC Port: Connect the 65W power supply
10. LAN Port: Speed up to 1000Mbps
11. HOST Port: Connect to the laptop

USB C Dual 4K Display Docking Station Quick Start Guide

Before connect the dock, please Install the driver by visiting: <https://www.synatics.com/products/displaylink-graphics>

Step 1: Connect the 65W power supply to the dock's DC Power input port (9)

Step 2: Use USB C cable coming with the dock to connect the dock and laptop via HOST port (11)

If your laptop does not equip with a USB C port, you can connect our dock to the USB3.0 Port of your laptop via the USB C to USB A cable.

Note: If you connect the dock to the USB C port that does not support charging or the USB 3.0 of your laptop, please connect your laptop power supply to your laptop for charging.

Step 3: Connect two monitors via HDMI 1 or DP 1 Port (6) and HDMI 2 or DP 2 Port(8)

Step 4: Please launch the Displaylink App

Dual 4k Extended Monitors Configuration



Step 5: Attach USB and USB-C devices(USB driver, keyboard, mouse, printer, etc.) to the USB ports on both the front and back of the dock (2,3,4,7). It is recommended to connect Wireless mouse and wireless devices to connect the USB 2.0 port (7).

Step 6: Connect the speaker, headphones, or microphone to the front audio ports(5).

And connect the Ethernet cable to RJ45 Ethernet port(10)

USB-C DP Alt Mode (DP 1.2HBR21)

HDMI 1	DP 1	HDMI 2	DP2	Remark
3840×2160/60Hz				Single video output
	3840×2160/60Hz			
		3840×2160/60Hz		
			3840×2160/60Hz	
3840×2160/60Hz		3840×2160/60Hz		Dual video output
3840×2160/60Hz			3840×2160/60Hz	
	3840×2160/60Hz	3840x.2160/60Hz		
	3840×2160/60Hz		3840×2160/60Hz	

Please note that you only can extend or mirror external dual monitors via:

HDMI 1 and HDMI 2

HDMI 1 and DP 2

DP 1 and HDMI 2

DP 1 and DP 2

**HDMI 1 and DP 1 cannot be used at the same time

**HDMI 2 and DP 2 cannot be used at the same time


Any questions, we are here to help! Email: support@tobenone.com

Because the only question we can't fix is the one we don't know



<https://tobenone.com/pages/warranty>

Documents / Resources

	<p>TOBENONE UDS030 Docking Station [pdf] User Manual UDS030 Docking Station, UDS030, Docking Station, Station</p>
---	---