



TOBENONE UDS030 Dual 4K Display Docking Station User Guide

[Home](#) » [TOBENONE](#) » TOBENONE UDS030 Dual 4K Display Docking Station User Guide 

Contents

- [1 TOBENONE UDS030 Dual 4K Display Docking Station](#)
- [2 Ports and connectors](#)
- [3 Extended Monitors Configuration](#)
- [4 More Information](#)
- [5 Warranty](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)




TOBENONE UDS030 Dual 4K Display Docking Station



THANK YOU!

Thank you for purchasing Tobenone Universal dual 4K@60Hz Dock UDS030! Our dock provides the ability to connect up to two 4K@60Hz displays, RJ45 Gigabit Ethernet, audio input and output, 8 USB peripherals and SD/TF slot to your laptop via one hybrid USB cable.

Ports and connectors

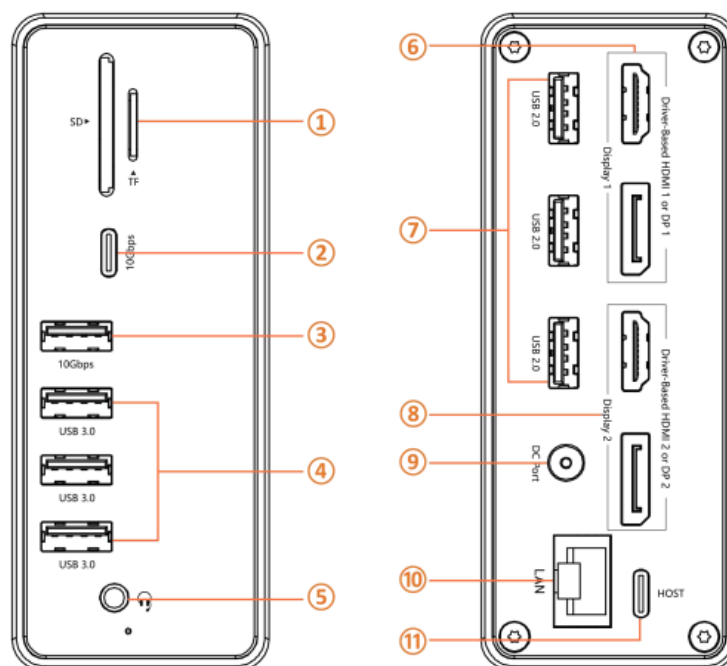


1. **SD/TF**: Support reading and writing
2. **USB C 3.1** : Speed up to 1 0Gbps
3. **USB A 3.1** : Speed up to 1 0Gbps
4. **USB A 3.0**: Speed up to 5Gbps
5. 3.5mm Audio/Microphone
6. **Display 1**: HDMI 1 or DP 1, resolution up to 4K@60Hz(driver-based)
7. **USB A 2.0**: Special for wireless devices

8. **Display 2:** HDMI 2 or DP 2, resolution up to 4K@60Hz(driver-based)
9. **DC Port:** Connect the 65W power supply
10. **LAN Port:** Speed up to 1 000Mbps
11. **HOST Port:** Connect the laptop

Before connecting the dock, please download the driver by visiting:

<https://www.synaptics.com/products/displaylink-graphics/downloads> You also can scan the right QR code and send it to MacBook!

Extended Monitors Configuration



- **Step 1:** Connect the 65W power supply to the dock's DC port(9)
- **Step 2:** Use hybrid USB cable coming with the dock to connect the dock and laptop via HOST port(11)
 - **Note:** If the laptop's USB C port don't support charging or use the USB C to USB adapter, you need to run your laptop off of its own power supply!
- **Step 3:** Connect the display 1 via HDM 1 or DP 1 port(6), connect the display 2 via HDMI 2 or DP 2 port(8)
- **Step 4:** Please install the DisplayLink App

Dual 4k Extended Monitors Configuration



- **Step 5:** Attach USB and USB-C devices(USB driver, keyboard, mouse, printer, etc.) to the USB ports(2,3,4,7)). It is recommended to connect wireless mouse and keyboard to connect the USB 2.0 port (7).
- **Step 6:** Connect the speaker, headphones, or microphone to the audio port (5). And connect the ethernet cable to the RJ45 ethernet port(10)

USB-C DP Alt Mode [DP1.2/DP1.4]

HDMI 1	DP 1	HDMI2	DP2	Remark
3840×2160/60Hz				Single video output
	3840×2160/60Hz			
		3840×2160/ 60Hz		
			3840×2160/ 60Hz	
3840×2160/60Hz		3840×2160/60Hz		Dual video output
3840×2160/60Hz			3840×2160/ 60Hz	
	3840×2160/ 60Hz	3840×2160/60Hz		
	3840×2160/60Hz		3840×2160/ 60Hz	

Please note that you only can extend or mirror external dual monitors via:

- HDMI 1 and HDMI 2 / HDMI 1 and DP 2 / DP 1 and HDMI 2 / DP 1 and DP 2
 - **HDMI 1 and DP 1 cannot be used at the same time
 - **HDMI 2 and DP 2 cannot be used at the same time

More Information

Any questions, we are here to help!

Email: support@tobenone.com

Because the only question we can't fix is the one we don't know
The only question we can't fix is the one we don't know

Scan



Warranty

Free Warranty Extended

- 24-Month Warranty

- Register your product for a FREE upgrade to a 24-Month Warranty: <https://tobenone.com/warranty>

Documents / Resources

	TOBENONE UDS030 Dual 4K Display Docking Station [pdf] User Guide UDS030 Dual 4K Display Docking Station, UDS030, Dual 4K Display Docking Station, 4K Display Docking Station, Display Docking Station, Docking Station
---	---

References

- [User Manual](#)