



TONMIND Sip IP Speaker User Guide

[Home](#) » [TONMIND](#) » TONMIND Sip IP Speaker User Guide 

Contents

- [1 TONMIND Sip IP Speaker](#)
- [2 Models](#)
- [3 Features](#)
- [4 Specification](#)
- [5 Hardware Interface](#)
 - [5.1 Web Setting](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

TONMIND

TONMIND Sip IP Speaker



Models



SIP-S01



SIP-S11(T)



SIP-S21



SIP-S21T



SIP-S22



SIP-S22T

Features

- Excellent sound for music and announcement.
- The standard package includes PoE cable.
- 48K OPUS Audio Codec enables excellent sound quality.
- Support web firmware upgrade for easy maintenance.


- Standard SIP protocol to compatible with other SIP devices.
- Support RTP Multicast as alternation of SIP backend system.

Specification

Model	SIP-S01	SIP-S11	SIP-SIIT	SIP-S21	SIP-S21T	SIP-522	SIP-S22T
Protocol	SIP, RTP Multicast, HTTP						
Power	PoE or DC 12V/24V						
Codec	OPUS, G711U,G711A, G722, GSM, MPI,MP2, MP3, WAV, LPCM s16le						
Network Interface	RJ45, 10BASE-T/100BASE-TX						
Rated Power	15W	15W	30W	15W	30W	15W	30W
Max SPL	96dB	101dB	105dB	113dB	120dB	113dB	120dB
Frequency Response	100Hz- 18KHz	80Hz- 20KHz	80Hz- 20KHz	300Hz- 8KHz	300Hz- 8KHz	300Hz- 8KHz	350Hz- 8KHz
Type	Ceiling	Wall	Wall	Horn	Horn	Horn	Horn
Material	Metal	ABS(IPSS)	ABS (IPSS)	ABS (IP67)	ABS(IP67)	ABS (IP67)	ABS (IP67)
Weight	1KG	2.4KG	2.5KG	1.3KG	2KG	1.3KG	2KG
Size	200 X 90 mm	296 x 196 ,c157mm	296 x 196 x 157 mm	225 K 165 x 240mm	285 x 205 x 290mm	200 x 230 mm	246 11 29 2 mm

Hardware Interface

Set SIP-SII as example, the SIP speaker power supply is PoE or DC 12V/24V, which can not be used the same time.

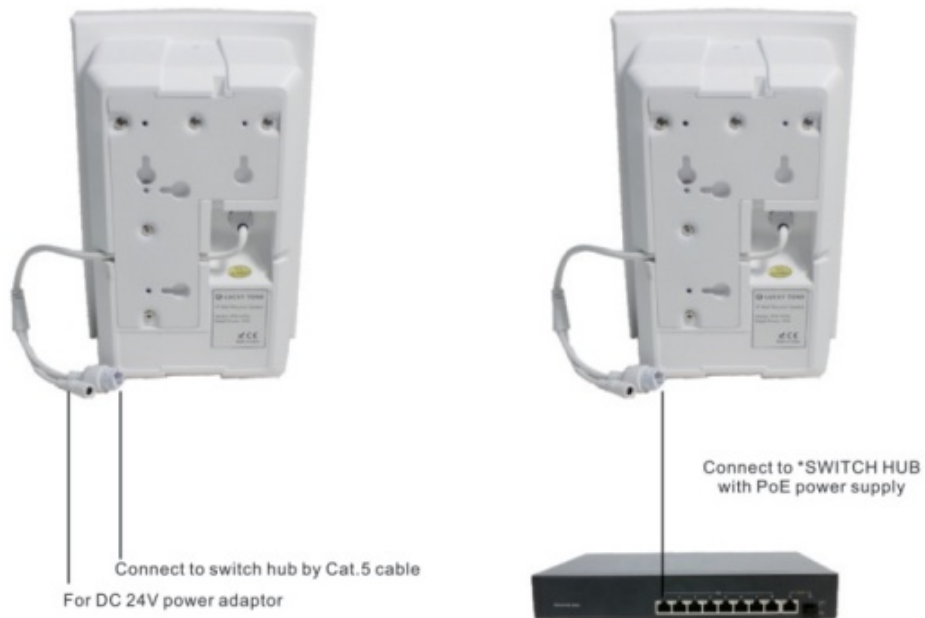

IPTool Setting

1. Enter www.tonmind.com to download IPTool for configuration. (Download routine: Support>Download Center>Software).
2. Scan Local area network devices.
3. Start your setting.

Web Setting

1. Change the IP of computer to 192.168.5.X network segment.
2. Open a browser and type in <http://192.168.5.200>
3. Enter the user name and password in Login page.
Default user: admin password: tm1234
4. Start your setting.

Status	
Network	
SIP Account	
Audio	
RTP Multicast	
Upgrade	
Security	

Status	
Serial Number	E4607CD01B172434
Firmware Version	CS20-V2.6.0
Up Time	00:02:18
SIP1 Status	REG SUCCESS
SIP2 Status	NONE

Network	
MAC Address	A2:C0:A4:13:09:FC
IP Address	192.168.5.186
Subnet Mask	255.255.255.0
Gateway	192.168.5.1
Primary DNS	218.85.152.99
Secondary DNS	218.85.157.99

If you need any technical support, please contact : support@tonmind.com

Web: www.Jpnmind.com

TON MIND TECHNOLOGY LIMITED

Documents / Resources

	TONMIND Sip IP Speaker [pdf] User Guide Sip IP Speaker, Sip IP Speaker, IP Speaker
---	---