





ToSee Security S3454 Wifi Siren Alarm Sensor Smart Alarm Siren Home Security System Instructions

[Home](#) » [ToSee Security](#) » ToSee Security S3454 Wifi Siren Alarm Sensor Smart Alarm Siren Home Security System Instructions 

ToSee


DETECT CONNECT PROTECT
SIREN ALARM
INSTRUCTION

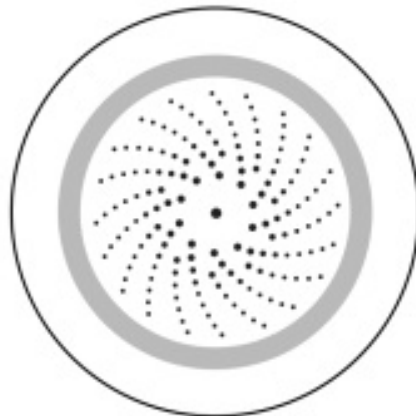

Contents

- [1 Product Configuration](#)
- [2 Specifications](#)
- [3 LED State](#)
- [4 Get Started with Tuya Smart App](#)
- [5 What's the App User Interface Like](#)
- [6 Experience Advanced Features](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

Product Configuration

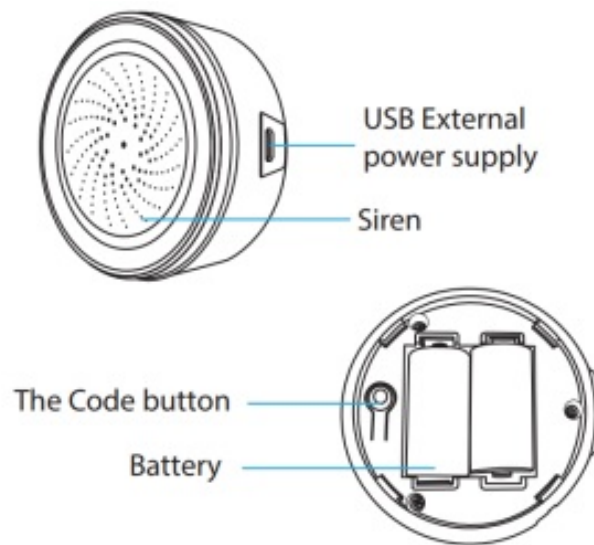

Notice: Please use a USB power supply, the backup battery can only work for two days. Plug in the USB power supply and load the battery at the same time, then the Sensor will work in priority.

Specifications

Siren with humidity and temperature sensor Trigger alarm make sound and light

Power Supply: USB 5V/1A

Backup Battery: CR123A-3V X 2

Volume: 105db (Max)

Wireless Type: 2.4GHz

Wireless Standard: IEEE 802.11b/g/n

Wireless Range: 45M

Operating Temperature: 0°C 40°C (32°F 104°F)

Operating Humidity: 20% 85%

Storage Temperature: 0°C 60°C (32°F 140°F)

Storage Humidity: 0% 90%

Size: 68 mm x68 mm x33mm

Support: Amazon Echo, IFTTT, TMALL GENIE, Rokid



Smart Life



IFTTT

LED State

| Device Status | LED State |
|---------------|--|
| Smart Wi-Fi | Indicator flashes quickly |
| AP mode | Indicator flashes slowly |
| Triggered | Indicator flashes |
| Standby | Indicator OFF |
| Reset | Indicator lights up for 4s and after 2 seconds lights off, device goes into configuration mode |

How to reset?

1. Press the reset button for 6 seconds till the indicator flash rapidly. Then device turns to smart wifi mode.
2. Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

Notice: The device has a memory function. it will return to the prior state after re-power on . Users can remove the recording by resetting the button and APP setting.

Get Started with Tuya Smart App



<http://smartapp.tuya.com/smartlife>



1. Download APP

- Download the “Smart Life” app from APP Store or Google Play to your mobile.

2. Register and Login

- Launch the “Smart life” app.
- To register, enter your mobile phone number or email address, create a password, then login to the app.

- Log in if you have an account already.

3. Add Device

- Power on the smart sensor which default mode is **Smart WiFi** mode.
- Select the “+” symbol on the top right-hand corner.
- Select your product type and follow the instructions of the app.
- **If the connecting fails, try using AP Mode**
- On the “Add device” page select “AP Mode” on the top right-hand corner and follow the instructions of the app.
- Finally, have fun!

What's the App User Interface Like ?



Experience Advanced Features

You can experience the various advanced features of the product with the app, just try and do it yourself.

Main function

- Timed alarm: it will have an error of about 30 seconds
- Settings: modify the temperature and humidity alarm range; modify the alarm duration and alarm sound
- Alarm History: check the alarm history of added devices in the message center

Linkage alarm setting

- To connect two Sensors via scene-setting.

Device sharing

- Allow others to control the device

Push notification

- Open/close push notification


Remove device

- Restore default settings; Delete and add the device again to clear the record by APP.



Make Your Home Smarter

Documents / Resources

| | |
|---|--|
|  | ToSee Security S3454 Wifi Siren Alarm Sensor Smart Alarm Siren Home Security System [pdf] Instructions S3454, Wifi Siren Alarm Sensor Smart Alarm Siren Home Security System |
|---|--|