

200 series wall hood

AW 230

AW 230 790

Stainless steel, Width 36" (90 cm).
HVI CFM: 360, High Speed.
Air extraction/Air recirculation.
Standard duct cover included.

Installation accessories

AD 200 322

Stainless steel duct cover extension,
Length: 3' 3 3/8" (1000 mm).

AD 200 392

Stainless steel ceiling collar, covers
screws on duct cover and uneven
gaps of ceilings that are not
completely flat.

Optional accessories

Part #17004654

Air recirculation module with
activated charcoal filter installed on
the inside of the duct cover.

Part #11049036

Activated charcoal filter for
recirculation module AA442810.

AD 223 356

Adapter for roof inclination left/right.

AD 223 366

Adapter for roof inclination front/
back.

Good to know:

The hood has to be larger than the
cooktop(s) or it has to be as large as
the cooktop(s). Please check the
requirements in chapter ventilation.

HVI Performance Values (CFM & SONES)

Model AW 230 790

Blower Internal

Exhaust Discharge: vertical
Speed: High Speed
Static Pressure (in H2O): 0.1"
HVI Wats: 274
CFM/Watt: 1.32
HVI CFM: 360
Sones (Reportable): 6.5

Model AW 230 790

Blower Internal

Exhaust Discharge: vertical
Speed: Working Speed
Static Pressure (in H2O): 0.027"
HVI Wats: 193
CFM/Watt: 0.98
HVI CFM: 180
Sones (Reportable): 1.5

Highlights

- Highly efficient extraction of cooking vapors.
- Low-noise blower.
- Patented filter technology with high level of grease absorption.
- Rim extraction filter with flat and easy-to-clean stainless steel surface.
- Dimmable LED light for optimum illumination of the entire cooktop.
- Air extraction or recirculation system.
- Air recirculation module with activated charcoal filters: quiet and highly efficient recirculation solution with odor reduction as in air extraction mode, and long replacement intervals.

Features

Three electronically controlled power levels and an intensive mode.
Grease filter saturation indicator.
Patented rim extraction filter, dishwasher-safe.
Warm white LED light (3,600 K), continuously dimmable.
Airflow-optimized interior for efficient air circulation.
Easy mounting system for simple installation and alignment.
A one-way flap comes included with the hood.


Planning notes

The hood includes a two-part duct cover with the dimensions from 22 15/16" (582 mm) to 34" (864 mm). Individual planning solutions can be accommodated using the optional duct cover accessory AD200322 or by shortening the lower edge of the telescopic duct cover.
Minimum clearance above gas or induction cooktops is 30".
The air recirculation module with activated charcoal filter can be installed on the external duct cover or on the inside of the duct cover.


Rating

Total rating: 425 W.
Total Amps: 3 A.
120 V / 60 Hz.
Connecting cable 51 3/16" with plug.


Numbers indicated
inside parenthesis () = mm

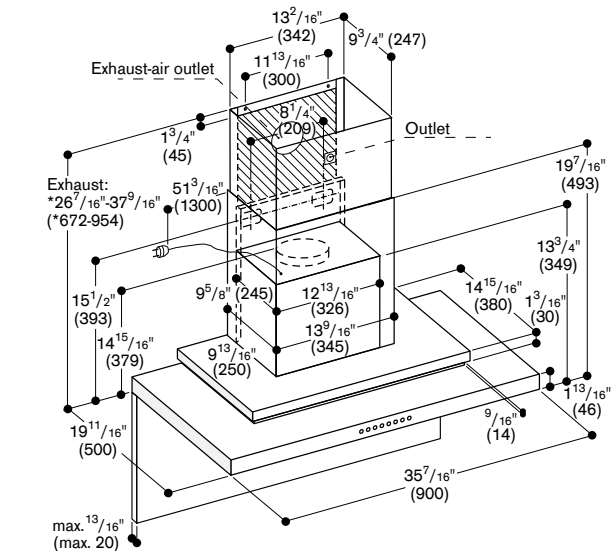

* Suitable for ceiling heights of 7.4 ft. (2.27 m) to 8.4 ft. (2.55 m);
Specifications refer to a distance from floor to lower duct cover edge of 5.2 ft. (1.60 m).

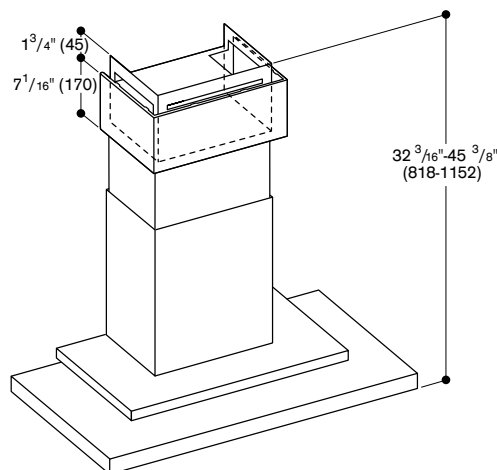

* Suitable for ceiling heights of 8 ft. (2.45 m) to 9 ft. (2.75 m);
Specifications refer to a distance from floor to lower duct cover edge of 5.2 ft. (1.60 m).

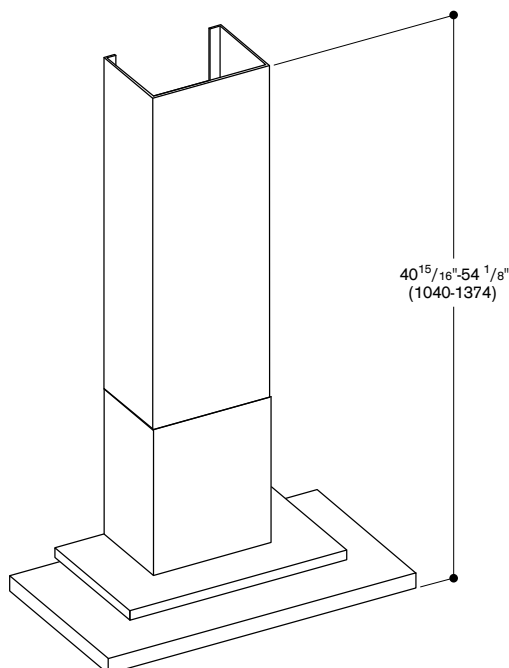

* Suitable for ceiling heights of 8.7 ft. (2.64 m) to 9.7 ft. (2.97 m);
Specifications refer to a distance from floor to lower duct cover edge of 5.2 ft. (1.60 m).

www.gaggenau.com/us
Revised: March 2025