

# tp-link NVR1008H VIGI 8 Channel Network Video Recorder Installation Guide

[Home](#) » [tp-link](#) » tp-link NVR1008H VIGI 8 Channel Network Video Recorder Installation Guide 



## Installation Guide Network Video Recorder

### Contents

- [1 NVR1008H VIGI 8 Channel Network Video Recorder](#)
- [2 Hard Drive Installation](#)
- [3 Hardware Connection](#)
- [4 Configuration](#)
- [5 More Management Methods](#)
- [6 FAQ \(Frequently Asked Questions\)](#)
- [7 Safety Information](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)

## NVR1008H VIGI 8 Channel Network Video Recorder

**Note:** images may differ from the actual products.



### Hard Drive Installation

For first time installation, please prepare a 3.5-inch hard disk drive (HDD). It is recommended to use the HDD of



enterprise or surveillance level. Before installation, please disconnect the power from the network video recorder (NVR).

### For steel shell products

1. Remove the fixing screws on the side and back panels to open the cover of the NVR.

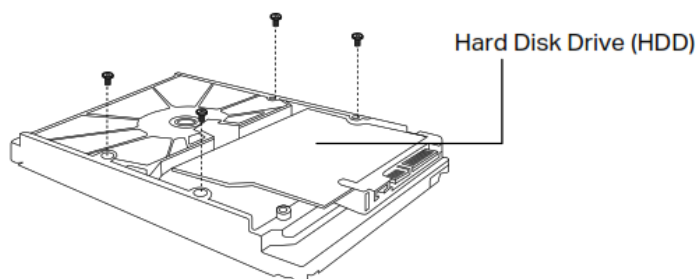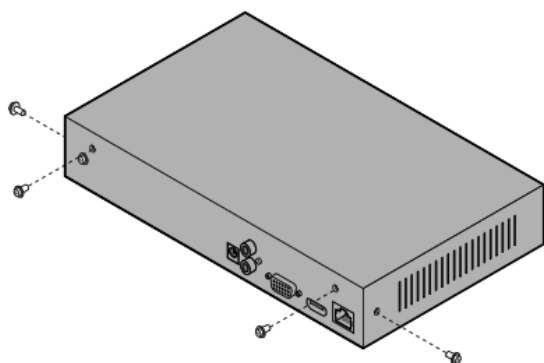



2. Attach the 4 included HDD screws to your hard drive. Do not fasten.
3. Match the 4 screws on the HDD with the 4 holes on the NVR, and insert the HDD interface into the slot.

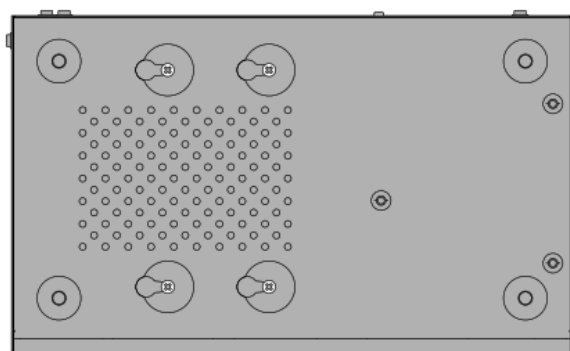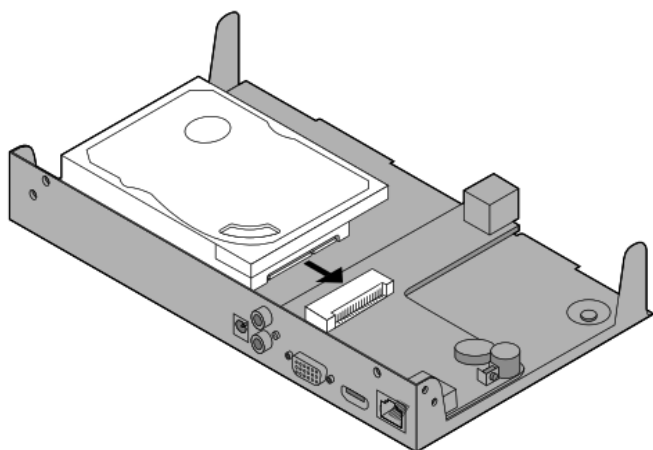

4. Flip the NVR upside down and fasten the HDD screws. Replace the cover and fasten the screws of the NVR.



### For plastic shell products

1. Press and hold the side cover button to remove the side cover.

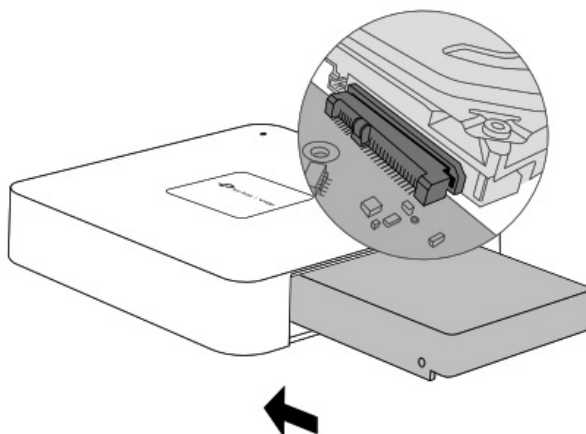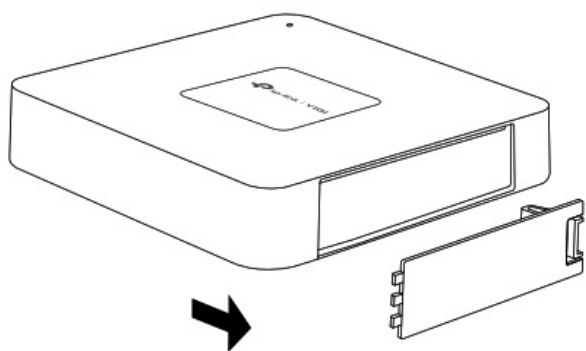


2. Push the HDD and insert it into the hard disk slot.

3. Fasten the screws to secure the HDD according to the actual HDD screw holes.

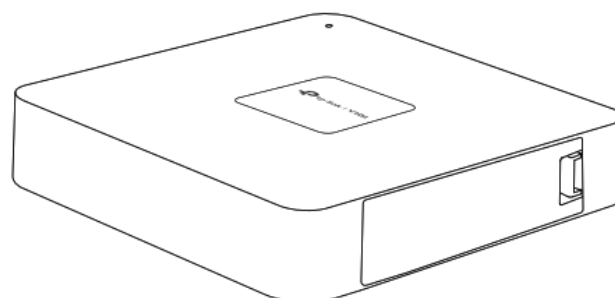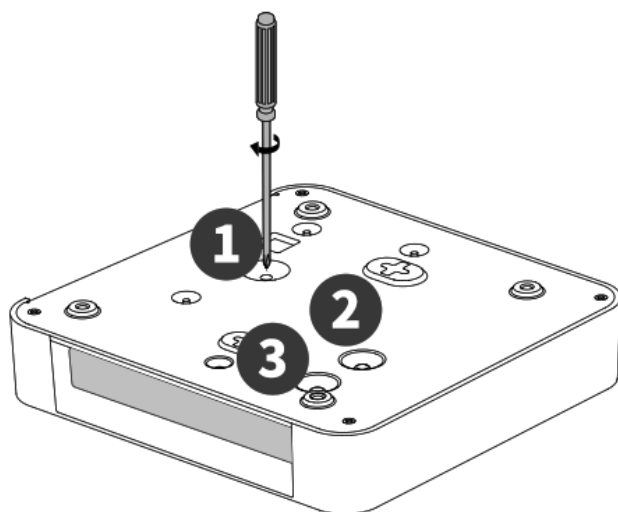

4. Install back the side cover.

## Hardware Connection

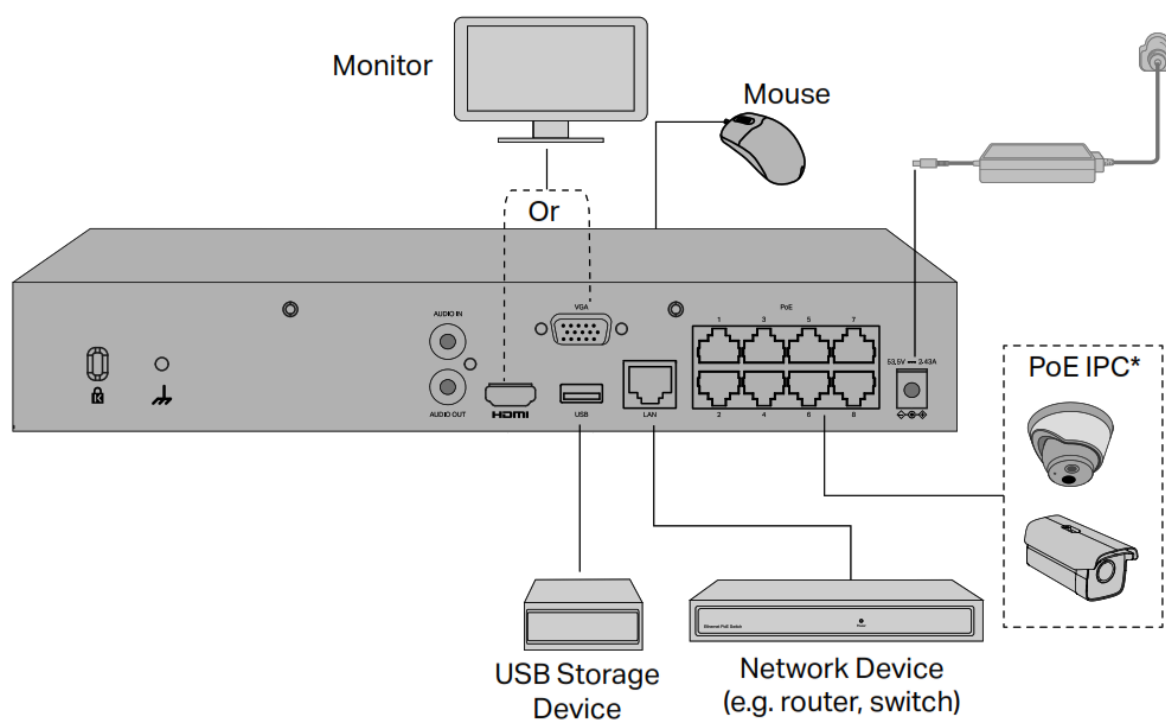

**Follow the steps below to complete the hardware connection.**

1. Connect your monitor to the HDMI or VGA port according to the connection port it supports.
2. Connect your monitor to a power source and turn it on.
3. Connect the LAN port of the NVR to a network device with an Ethernet cable.
4. Connect the provided USB Mouse to the USB Interface of the NVR.
5. Connect the power adapter to the NVR.

\*For PoE NVR, you can directly connect the PoE cameras to the PoE ports of the NVR for data transmission and power supply.

## Cautions

- If you want to turn off the NVR after hard drive installation, click the Power button on the web UI of NVR. Do not unplug it directly.
- The input voltage should match with the device power requirements.

## Configuration

NVR can add and manage cameras in batches.

\* Here we use TP-Link cameras as an example. For other camera brands, please refer to their User Manuals to add the cameras.

Step 1. Connect your cameras to the same network as your NVR.

Step 2. Follow the instructions to finish Quick Setup.

1. Create a login password for the NVR and a preset password for your unset cameras.

2. Click Auto Initialize and the NVR will automatically find and add the cameras in your network.

**Note:** If you don't want to use Auto Initialize, click Manually Initialize and follow the Setup Wizard to add cameras in your network and complete the setup.

**Step 3.** Right click on the Live View screen to open the Main Menu for management.

**Note:** For more instructions, please refer to the NVR's User Guide.

(Optional) Step 4. Bind your NVR to a TP-Link ID for remote access and management. (Internet required)

**Note:** If you don't have a TP-Link ID, sign up first.

## More Management Methods

### ■ VIGI Security Manager (Windows only)

You can use the VIGI Security Manager to view live video and modify NVR settings on your computer. Please Download it on your computer at <https://www.tp-link.com/download-center/>

### ■ VIGI App

The VIGI App provides a simple and intuitive way to remotely view live video, manage NVR, and get instant alerts.



<https://www.tp-link.com/app/qrcode/?app=vigi>

Scan the QR code to download and install the VIGI app from the App Store or Google Play.

### ■ Web Browser

Find the NVR's IP address on your router's client page. On your local computer, open a web browser and enter https://NVR's IP address (<https://192.168.0.240> by default). Follow the web instructions to activate the NVR.

## FAQ (Frequently Asked Questions)

Q1. What should I do if I forget the login password of my NVR?
A1. Click Forgot Password on the login page and then follow the instructions to reset the password.
A2. For steel shell products, remove the cover, then press and hold the Reset button inside the NVR for over 3 seconds, release the button when you hear a beep. The NVR will restore to the factory settings. Then follow Quick Setup to create a login password.
Q2. What can I do if my NVR fails to connect to the Internet?
A1. Check if the internet is working properly.
A2. Make sure your NVR is in the same network segment as your network devices. For more details, please refer to the NVR's User Guide.

If you have more questions, please visit <https://www.tp-link.com/support/faq/2850/>.

## Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended.
- Adapter shall be installed near the equipment and shall be easily accessible.
- Use only power supplies that are provided by the manufacturer and in the original packing of this product. If you have any questions, please don't hesitate to contact us.
- Avoid the disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
- Place the device with its bottom surface downward. Install it at stable places, and prevent it from falling.

### CAUTION!

Risk of explosion if the battery is replaced by an incorrect type

### CAUTION: Do not ingest battery, Chemical Burn Hazard

This product contains a coin / button cell battery. If the coin / button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.

Keep new and used batteries away from children.

If the battery compartment does not close securely, stop using the product and keep it away from children.

If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of device. Please use this product with care and operate at your own risk.


TP-Link hereby declares that this device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863.

The original EU declaration of conformity may be found at <https://www.tp-link.com/en/support/ce/>.



© 2022 TP-Link 7106509912 REV1.2.0

## Documents / Resources

<div data-bbox="140 902 209 913">  TP-link   VIGI </div> <div data-bbox="161 976 256 987"> Installation Guide </div> <div data-bbox="173 1108 242 1115"> Network Video Recorder </div>	<div data-bbox="319 949 1458 1077"> <p><a href="#">tp-link NVR1008H VIGI 8 Channel Network Video Recorder</a> [pdf] Installation Guide  VIGI-NVR1104H-4P, NVR1008H VIGI 8 Channel Network Video Recorder, NVR1008H, VIGI 8  Channel Network Video Recorder, 8 Channel Network Video Recorder, Network Video  Recorder, Video Recorder, Recorder</p> </div>
---	--

## References

- [!\[\]\(9bf097d682561b2ffd12d57a40ca73b1\_img.jpg\) Download Center | TP-Link](#)
- [!\[\]\(51d3868eac81c232f6ef399d2bd16077\_img.jpg\) Anatel — Agência Nacional de Telecomunicações](#)
- [!\[\]\(a2c132b99b4fcf21fd2bcbbdcf2be642\_img.jpg\) Download Center | TP-Link](#)
- [!\[\]\(5ec38675172d195694038a5f80a05d7e\_img.jpg\) WiFi Networking Equipment for Home & Business | TP-Link](#)
- [!\[\]\(6e5db9be9f6501972c386bc8b9567019\_img.jpg\) Download Center | TP-Link](#)
- [!\[\]\(fde93ec981d89b92cd01f5b6a2a111a5\_img.jpg\) TP-Link](#)
- [!\[\]\(1239c315756aa530b61a30defc626f03\_img.jpg\) CE Regulatory Compliance | TP-Link](#)