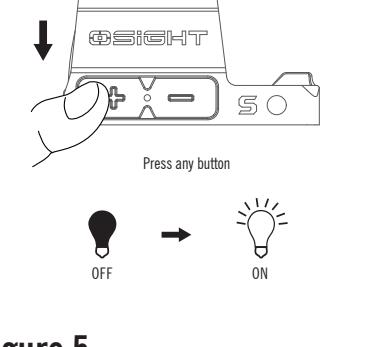
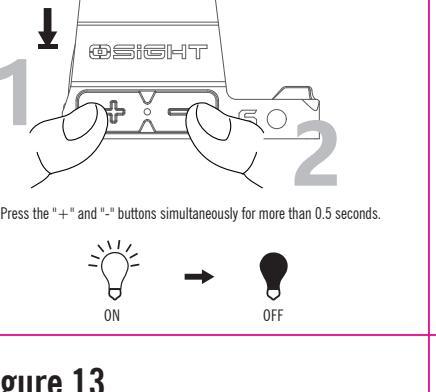
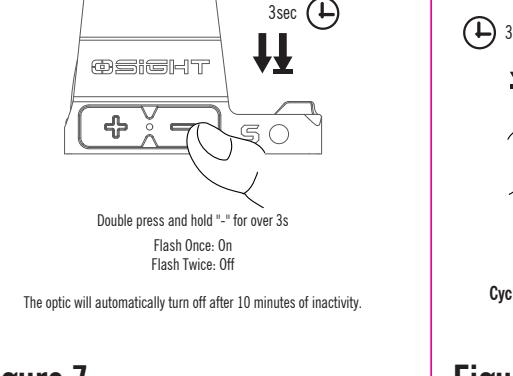
Table 2:
O sight S Charging Cover

Main Body	Plastic + AL6061
Dimensions	42.5*30*37.5 mm / 1.67*1.18*1.48 in
Weight	33 g / 1.16 oz
Battery Capacity	220 mAh (3.8 V (0.85 Wh))
Input	DC 5 V / 2 A (MAX)
Output	DC 4.45 V / 50mA
Time to Fully Charge the Optic	1.5 H

Table 1: Optic
SPECIFICATIONS


Mode	Mode 3	2000 H	2100 H	2000 H
This is at 100% brightness, with motion detection on and ambient light sense on. For more runtime details please visit osight.com .				
Note: Please fully charge the product every three months to maintain stable power consumption.				
Charging Cover	45 mAh 3.87 V (18 Wh)	1.0 m	IPX7	Working Temperature 0°C~40°C
Time to Fully Charge the Charging Cover	1.5 H (Requiring a 5 V / 2 A (10 W) power source. When the power source capacity is insufficient, the charging time will be longer.)			
	27.5 g / 0.97 oz (Housing Material)			

Optic Operation Instructions

Figure 4
Manual OnFigure 5
Manual OffFigure 6
Motion Sensor Function
On/OffFigure 7
Brightness Adjustment (Manual Mode)

CONTENTS

(EN) English	01
(CN) 简体中文	03
(DE) Deutsch	05
(FR) Français	08
(JP) 日本語	10
(TH) ไทย	14
(ES) Español	16
(KR) 한국어	18
(IT) Italiano	21

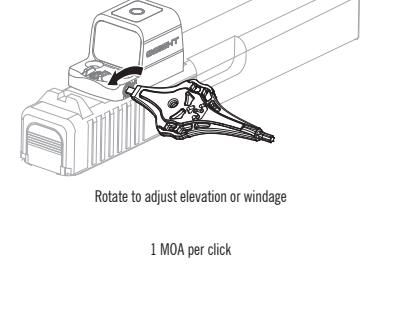Figure 13
Zero Setting

1 MOA per click

1. Rotate to adjust elevation or windage

2. Press the “+” and “-“ buttons simultaneously for over 0.5 seconds to set the optic.

3. Auto mode (off) is selected.

4. Turn the dial to the right (up) or left (down) to adjust the reticle height.

5. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

6. Turn the dial to the right (up) or left (down) to adjust the reticle height.

7. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

8. Turn the dial to the right (up) or left (down) to adjust the reticle height.

9. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

10. Turn the dial to the right (up) or left (down) to adjust the reticle height.

11. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

12. Turn the dial to the right (up) or left (down) to adjust the reticle height.

13. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

14. Turn the dial to the right (up) or left (down) to adjust the reticle height.

15. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

16. Turn the dial to the right (up) or left (down) to adjust the reticle height.

17. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

18. Turn the dial to the right (up) or left (down) to adjust the reticle height.

19. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

20. Turn the dial to the right (up) or left (down) to adjust the reticle height.

21. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

22. Turn the dial to the right (up) or left (down) to adjust the reticle height.

23. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

24. Turn the dial to the right (up) or left (down) to adjust the reticle height.

25. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

26. Turn the dial to the right (up) or left (down) to adjust the reticle height.

27. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

28. Turn the dial to the right (up) or left (down) to adjust the reticle height.

29. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

30. Turn the dial to the right (up) or left (down) to adjust the reticle height.

31. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

32. Turn the dial to the right (up) or left (down) to adjust the reticle height.

33. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

34. Turn the dial to the right (up) or left (down) to adjust the reticle height.

35. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

36. Turn the dial to the right (up) or left (down) to adjust the reticle height.

37. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

38. Turn the dial to the right (up) or left (down) to adjust the reticle height.

39. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

40. Turn the dial to the right (up) or left (down) to adjust the reticle height.

41. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

42. Turn the dial to the right (up) or left (down) to adjust the reticle height.

43. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

44. Turn the dial to the right (up) or left (down) to adjust the reticle height.

45. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

46. Turn the dial to the right (up) or left (down) to adjust the reticle height.

47. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

48. Turn the dial to the right (up) or left (down) to adjust the reticle height.

49. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

50. Turn the dial to the right (up) or left (down) to adjust the reticle height.

51. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

52. Turn the dial to the right (up) or left (down) to adjust the reticle height.

53. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

54. Turn the dial to the right (up) or left (down) to adjust the reticle height.

55. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

56. Turn the dial to the right (up) or left (down) to adjust the reticle height.

57. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

58. Turn the dial to the right (up) or left (down) to adjust the reticle height.

59. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

60. Turn the dial to the right (up) or left (down) to adjust the reticle height.

61. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

62. Turn the dial to the right (up) or left (down) to adjust the reticle height.

63. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

64. Turn the dial to the right (up) or left (down) to adjust the reticle height.

65. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

66. Turn the dial to the right (up) or left (down) to adjust the reticle height.

67. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

68. Turn the dial to the right (up) or left (down) to adjust the reticle height.

69. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

70. Turn the dial to the right (up) or left (down) to adjust the reticle height.

71. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

72. Turn the dial to the right (up) or left (down) to adjust the reticle height.

73. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

74. Turn the dial to the right (up) or left (down) to adjust the reticle height.

75. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

76. Turn the dial to the right (up) or left (down) to adjust the reticle height.

77. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

78. Turn the dial to the right (up) or left (down) to adjust the reticle height.

79. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

80. Turn the dial to the right (up) or left (down) to adjust the reticle height.

81. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

82. Turn the dial to the right (up) or left (down) to adjust the reticle height.

83. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

84. Turn the dial to the right (up) or left (down) to adjust the reticle height.

85. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

86. Turn the dial to the right (up) or left (down) to adjust the reticle height.

87. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

88. Turn the dial to the right (up) or left (down) to adjust the reticle height.

89. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

90. Turn the dial to the right (up) or left (down) to adjust the reticle height.

91. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

92. Turn the dial to the right (up) or left (down) to adjust the reticle height.

93. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

94. Turn the dial to the right (up) or left (down) to adjust the reticle height.

95. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

96. Turn the dial to the right (up) or left (down) to adjust the reticle height.

97. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

98. Turn the dial to the right (up) or left (down) to adjust the reticle height.

99. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

100. Turn the dial to the right (up) or left (down) to adjust the reticle height.

101. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

102. Turn the dial to the right (up) or left (down) to adjust the reticle height.

103. Turn the dial to the right (up) or left (down) to adjust the reticle left-right position.

104. Turn the dial to the right (up) or left (down) to adjust the ret