



U-CLOUDLINK GLMU20A02 4G Wireless Data Terminal User Manual


[Home](#) » [uCloudlink](#) » U-CLOUDLINK GLMU20A02 4G Wireless Data Terminal User Manual 



Contents

- [1 Product Overview](#)
- [2 Function Introduction](#)
- [3 Local SIM Guide](#)
- [4 Quick Start Guide](#)
- [5 Technical Specification](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

Product Overview

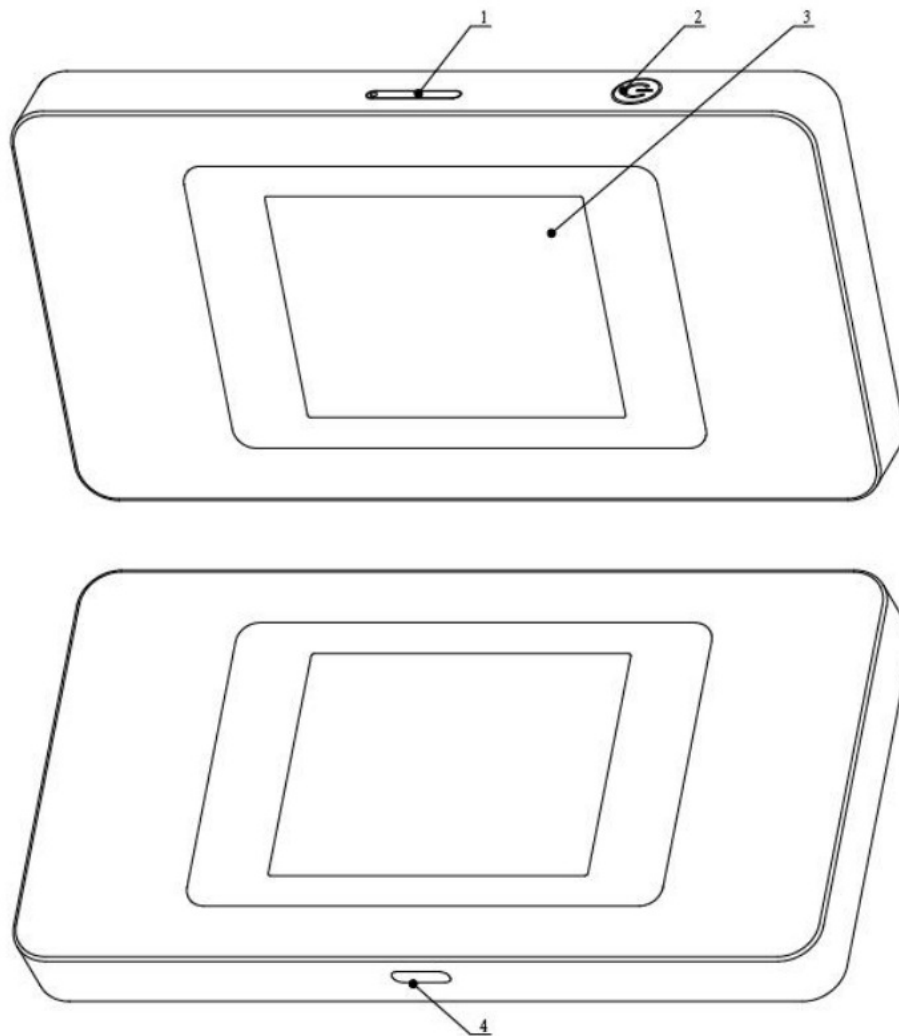


1. SIM Slot
2. Power Button
3. LCD Touch Display
4. Type-C(Input)

Function Introduction

1. Power on: Press power button for 3 seconds.
2. Power off : Press power button for 5 seconds.
3. Reset Press the power button for 18 seconds.

Local SIM Guide

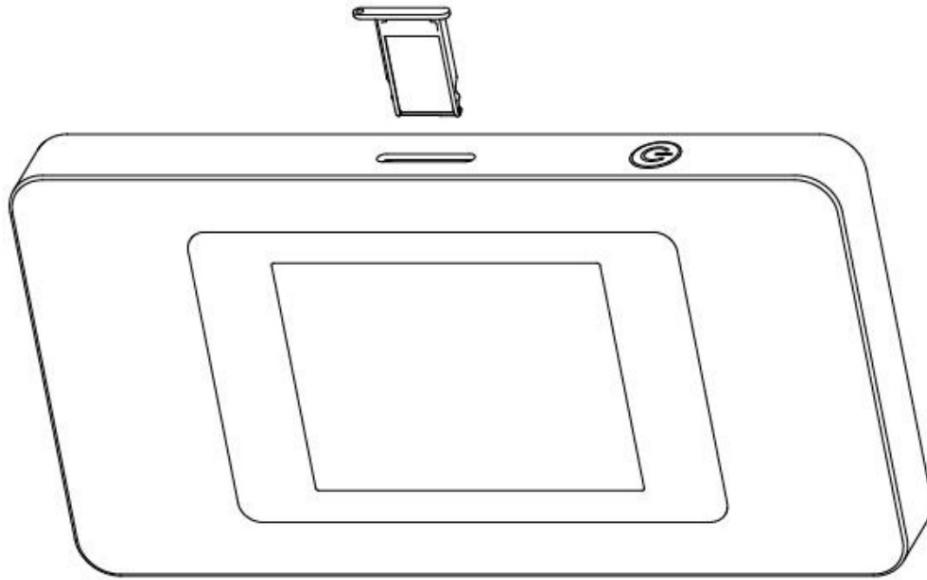

1. Local SIM is supported by U3X, Only insert Nano-SIM card (small card). Please turn off the device first if you want to insert/pull out the SIM card.
2. Use a needle to pull out the SIM cards as shown in the picture below. Please contact customer service if any issue encountered

Tips: U3 device does not support SIM cards with PIN codes, if you want to use this type of SIM card, please unlock the PIN code first.


User Interface(Subject to actual latest software)



1. Data usage SSID: Show data package usage, WiFi name, and WiFi password
2. QR Code For downloading apps and binding the device.
3. Connections Management of devices that access Wi-Fi.
4. Network optimization: optimize the network with one click to improve the Internet experience.




5. Flow Protection Turning on flow protection will block some applications and websites from the abnormally consuming flow.
6. SIM Card After the user inserts the local SIM card, the user can choose whether to use the cloud card or local SIM card; including the APN configuration of the local card.
7. USB network sharing: Use USB to share device network
8. Language Set the User Interface language

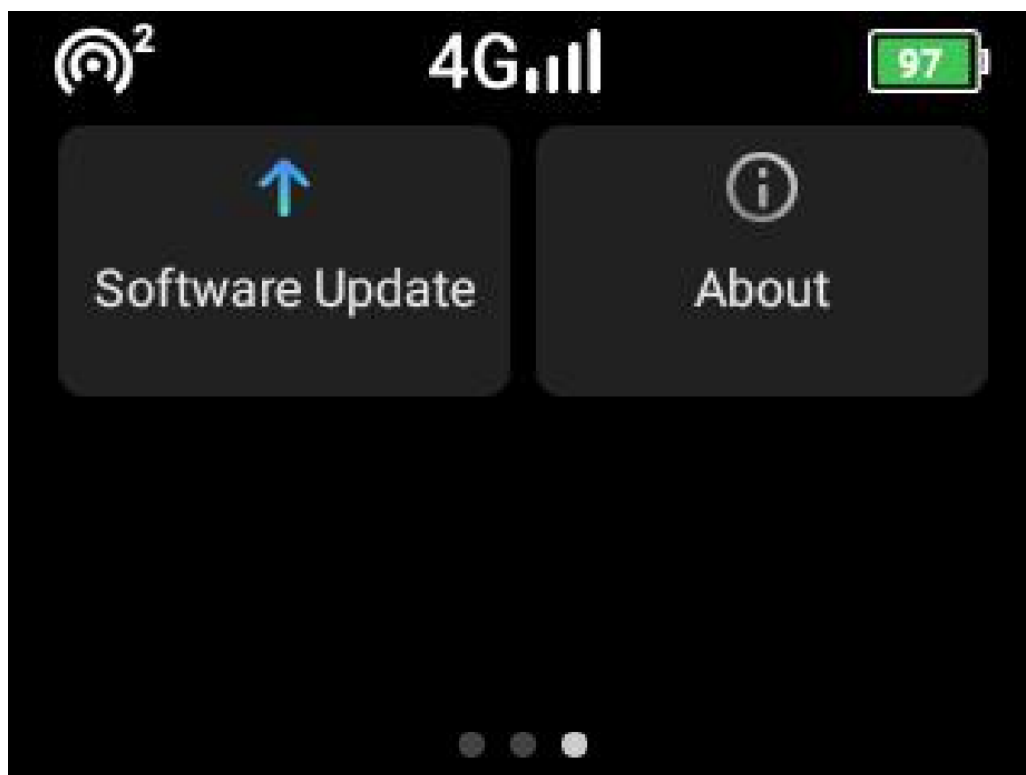

9. Software Update It will automatically upgrade to the latest version after clicking the button. To save flow you can connect your device to other WiFi by turning on the WiFi switch and using other WiFi networks to download the upgrade package.
10. About Displays the software version, IMEI number, and factory settings of the device.

Quick Start Guide

1. Turn on

Press and hold the power button “” for 3 seconds and wait for the device to boot.

Select “Login” to finish the following steps.

2. Registration of GlocalMe accounts.

Scan the QR code displayed on the device screen or search “GlocalMe” in App Store or another marketplace to download the GlocalMe App on your cell phone and Register a GlocalMe account;

If you could not download the App after scanning the QR code, please choose to open it in safari to complete the download.

3. Use the App to log in to your local account, then click “My Device” “Activate Device” to scan the above QR code again to bind the device.

Or, you could also log in to your GlocalMe account on the device directly to complete binding.

4. Reboot the U3X device and Open the cellphone Wi-Fi, search for GlocalMe-****. Enter the Wi-Fi password displayed on the U3X screen.

Note:

1. After successful binding, please restart the device, and then it can be normally used.
2. Before you run out of the initial data, please recharge your account as soon as possible by selecting the appropriate amount in the charging center of the App. We support Alipay, Paypal, and other means to pay. After recharging, you can purchase any data packages in the package center, to enjoy lower Internet fees.

For more information, please pay a visit to GlocalMe’s website: www.glocalme.com.

Technical Specification

Model GLMU20A02

Box content: Device, User Manual, Type-C cable, SIM removal tool

Technical Specification

- Size 126 x 66 x 12.6mm
- Screen Size: 2.4 inch
- LTE FDD B1/2/3/4/5/7/8/9/12/13/17/18/19/20/25/26/28/66
- LTE TDD B34/38/39/40/41
- WCDMA B1/2/4/5/6/8/9/19
- GSM 850/900/1800/1900
- Wi-Fi 2.4G; 802.11 b/g/n
- SIM Slot Nano SIM
- USB Port: Type-C (input)
- Battery Capacity:3500mAh typical
- Power Input: 5V–2A

V. Warning

Specific Absorption Rate (SAR) information. SAR tests are conducted using standard operating positions accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while

operating can be well below the maximum value, in general, the closer you are to a wireless base station antenna, the lower the power output.

Before a new device can be made available for sale to the public, it must be tested and certified by the FCC that it does not exceed the exposure limit established by the FCC. Tests for each device are performed in positions and locations as required by the FCC. For body-worn operation, this device has been tested and meets the FCC RF exposure guidelines when used with an accessory designated for this product or when used with an accessory that contains no metal and that positions the device a minimum of 1.0 cm from the body.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause.

Undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and complies with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur during installation. If the device does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is suggested to try to correct the interference by the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and receiver.
- Connect the equipment to an outlet on a different circuit to the receiver.
- Consult the manufacturer or an experienced radio/TV technician for help.



Information on the disposal and recycling of the device

This symbol (with or without a solid bar) on the device, batteries (if included), and/or the packaging, indicates that the device and its electrical accessories (for example, a headset, adapter, or cable) and batteries should not be disposed of as household garbage. These items should not be disposed of as unsorted municipal waste and should be taken to a certified collection point for recycling or proper disposal. For detailed information about device or battery recycling, contact your local city office, household waste disposal service, or retail store.

Disposal of the device and batteries (if included) is subject to WEEE.

Directive Recast (Directive 2012/19/EU) and Battery Directive (Directive 2006/66/EC). The purpose of separating WEEE and batteries from other waste is to minimize the potential environmental impacts and human health risks of any hazardous substances that may be present.



Hong Kong uCloudlink Network Technology Limited

E-mail: service@ucloudlink.com

Hotline: +852 8191 2660

Facebook: GlocalMe

Instagram: @GlocalMeMoments

Twitter: @GlocalMeMoments


Youtube: GlocalMe

Address: Suite 603, 6/F, Laws Commercial Plaza
788 Cheung Sha Wan Road, Kowloon, Hong Kong

This product and related system are protected by one or more of uCloudlink's patents, for details please refer to <https://www.ucloudlink.com/patents>

Copyright © 2020 uCloudlink All Rights Reserved

Documents / Resources



[UCLLOUDLINK GLMU20A02 4G Wireless Data Terminal](#) [pdf] User Manual
GLMU20A02 4G Wireless Data Terminal, 4G Wireless Data Terminal, Data Terminal

References

-  [GlocalMe® - Always Better Connected](#)
-  [HyperConnect uCloudlink | Connecting and Sharing without Limitations](#)