



Contents [[hide](#)]

- [1 Umeox F04 Zikr Ring Flex](#)
- [2 Introduction](#)
- [3 Charging](#)
- [4 Basic operations](#)
- [5 Connect iQIBLA Life APP](#)
- [6 Basic functions](#)
- [7 Different sizes](#)
- [8 FCC](#)
- [9 Frequently Asked Questions](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)


Umeox

Umeox F04 Zikr Ring Flex




Introduction

1. Display screen
2. Button
3. Ring base change switch
4. Charging port

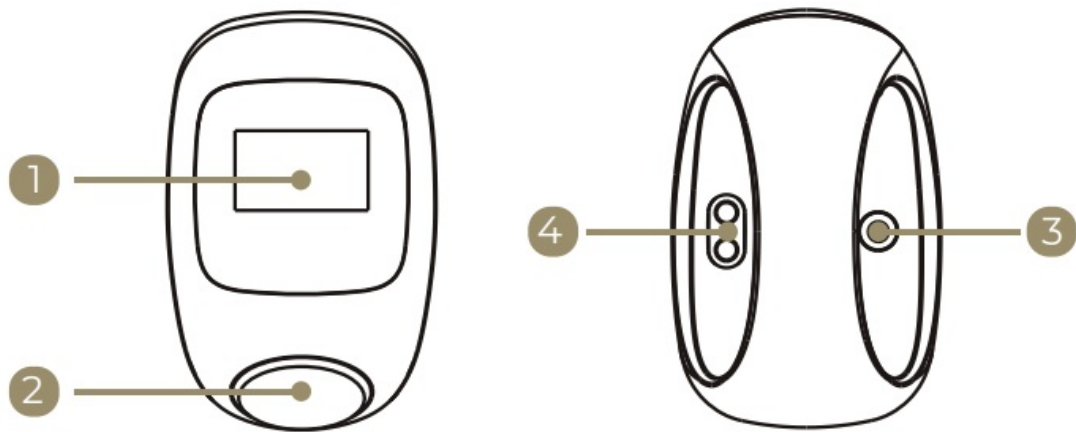

Charging

1. Make sure the charging case has been well charged.
2. Make the Ring's charging port and the thimble of the charging case on the same side, and put the Zikr Ring into the charging case.
3. When charging starts, the display screen displays the charging animation.
4. The current battery level is displayed when the Zikr Ring is taken out.
5. When charging is complete, the charging animation stops.

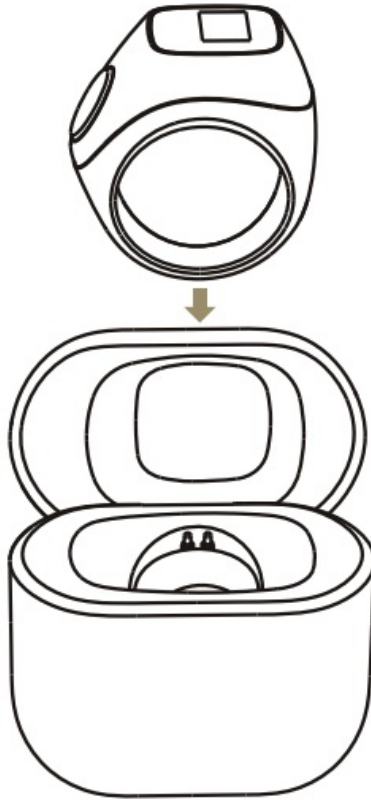

Note: Before starting to charge, check and clean up any water stains that may exist in the Zikr Ring charging port.

Basic operations


Button operations

1. Short press

- Wake up the screen and display home screen (before APP binding, the main screen is a tasbih counter but after binding, the main screen is time display).
- Short press on the button when displaying the time interface to enter tasbih counter.
- When the Bluetooth address is displayed, short press to flip the screen display direction.

2. Long press

- Long press on the button when displaying the main screen or tasbih counter interface to start a new count.
- Note: Counts updated to the APP only after reset the counts to zero. When tasbih counter is zero, long press to display the Bluetooth address.

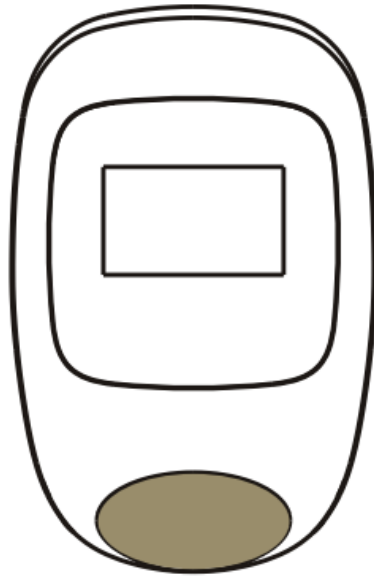

Interface display

1. Customized Tasbih icon
2. Battery
3. Bluetooth connection status
4. Time (APP binding required)
5. Tasbih counter



Connect iQIBLA Life APP

Bind Zikr Ring:

1. Use your smartphone to scan the QR code on the right to enter Google Play or App Store to download iQIBLA Life APP.
2. Open the APP to register a new account and fill in personal information.
3. Click on the iQibla logo at the bottom of the new device and choose “Zikr Ring Flex”
4. Select the device corresponding to the ring’s Bluetooth address. Complete the binding of Zikr Ring.



Note: Your ring can only be bind with one account, if you want to bind it to another account you would need to unbind it from the first account.

Unbind Zikr Ring:

1. Make sure that you are connecting the device you want to unbind.
2. Go to your ring page in the application and enter settings at the bottom of the menu.
3. Select “Unbind”.
4. Complete the unbinding by entering the verification number.

Basic functions

Tasbih counter

1. Tasbih Count: After the screen is turned on, use the button to make Tasbih.
2. Re-counting: Long press the button for 3 seconds, Zikr Ring will restart counting and save the last tasbih count record.
3. Synchronization: Open the APP, Zikr Ring will automatically synchronize the tasbih counting data to the APP after you reset the ring’s counter.

Adjusting prayer times

1. You can manually modify prayer times and reminders based on your region.
2. You can also customize the prayer reminder via the Azan in the APP.

Customize Tasbih

From iQIBLA Life APP you can customized your Tasbih by setting your own goals.

A) Tasbih

1. You can monitor the tasbih data displayed on the ring via APP.
2. You can customize tasbih notifications with specific numbers you choose, as well as their multiples.

B) Customized Tasbih

1. Go to iQIBLA Life APP and set your Tasbih target from Custom Tasbih part.
2. Choose the type of Zikr or set your own Zikr.
3. Set your target goal and press start.
4. Start using the ring to count, once the number reach your target the rings viberates and your Zikr will be saved in the Custom Tasbih records in the APP.

Find Zikr Ring

Click “Find Ring” on the ring interface of the APP, Zikr Ring will vibrate for 10 seconds, press the ring’s button to stop the vibration.

Prayer reminder

Turn on “Prayer Reminder” in the APP and synchronize, Zikr Ring will remind you for five times prayers .

Screen sleep

You can customize the ring’s screen sleep to suit your usage from 10 seconds to 60 seconds.

Tasbih reminder

Turn on “Tasbih Reminder” in APP and synchronize, Zikr Ring will remind you to make Tasbih.

Screen flip

After connecting APP, set the display direction of the screen according to your wearing

habits. You can also flip it by short pressing the ring's button while displaying the Bluetooth address on the ring's display.

Prayer calculation method

You can choose prayer calculation method based on your region or manually adjust prayers calculation angles for your region.

You can also choose the Asr Juristic Method based on the juristic of your region.

Multi-language switching

In the device settings, you can switch the device language and save it.


Languages supported by the device: العربية, English, Français, Deutsch, سیرفا, Türk, ,Bahasa Indonesia,

Different sizes

Zikr Ring Flex comes with two different sizes in one box together: small size (18mm, 20mm) and big size (20mm, 22mm). You can choose the type of size big or small that fits your finger.



Make sure the button faces iQibla logo

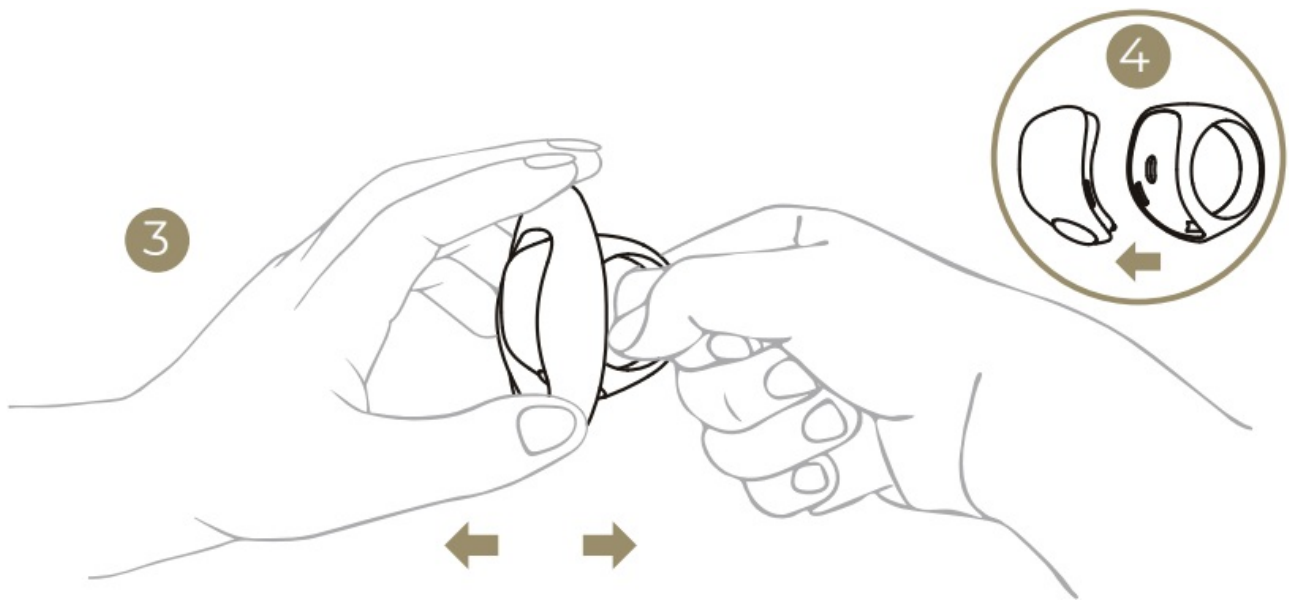

FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction

Frequently Asked Questions


- **Can I bind my Zikr Ring with multiple accounts?**

No, each Zikr Ring can only be bound to one account at a time. If you wish to bind it to another account, you must unbind it from the current account first.

- **How do I unbind my Zikr Ring from an account?**

To unbind your Zikr Ring, ensure you are connected to the device you want to unbind. Go to the ring page in the application, access settings at the bottom of the menu, select Unbind, and complete the unbinding process by entering the verification number.

Documents / Resources

	Umeox F04 Zikr Ring Flex [pdf] User Manual F04, 2A3D8-F04, 2A3D8F04, F04 Zikr Ring Flex, F04, Zikr Ring Flex, Ring Flex, Flex
---	--

References

- [User Manual](#)

📄 2A3D8-F04, 2A3D8F04, F04, F04 Zikr Ring Flex, FLEX, Ring Flex, UMEOX, Zikr Ring

📁 UMEOX Flex

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

Manuals+ | Upload | Deep Search | Privacy Policy | @manuals.plus | YouTube

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.