

UNI-T UT15B True RMS Digital Multimeter



# UNI-T UT15B True RMS Digital Multimeter Instruction Manual

[Home](#) » [UNI-T](#) » UNI-T UT15B True RMS Digital Multimeter Instruction Manual 

## Contents

- [1 UNI-T UT15B True RMS Digital Multimeter](#)
- [2 True RMS Digital Multimeter](#)
- [3 Compact & Ergonomics design](#)
- [4 Fast measurement](#)
- [5 Basic frequency measurement](#)
- [6 Technical Specifications](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)


# UNI-T

UNI-T UT15B True RMS Digital Multimeter




## True RMS Digital Multimeter

UT15B/17B/18B MAX series True RMS multi-meters have a compact and portable design, fast response, strong anti-interference to EMC interference, and come with standard gold-plated test leads and gold-plated fine-tipped test leads. They also feature full-range 1000V input protection, making them the ideal tool for electronic and electrical engineers.

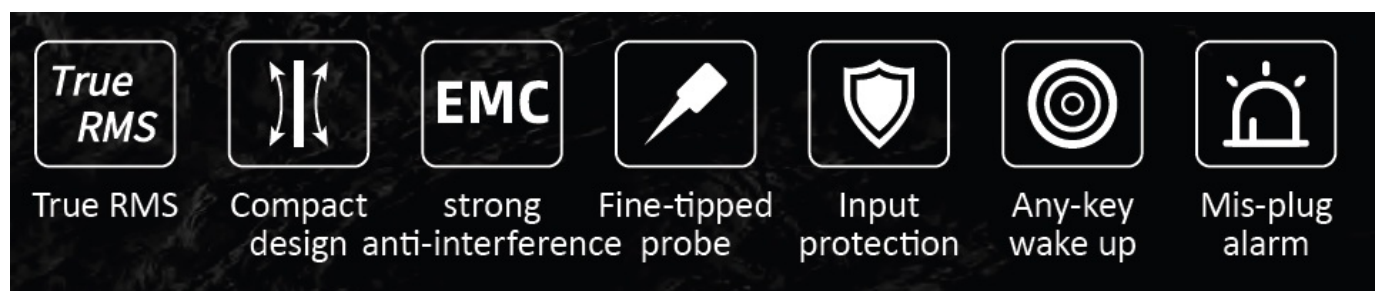

## Compact & Ergonomics design

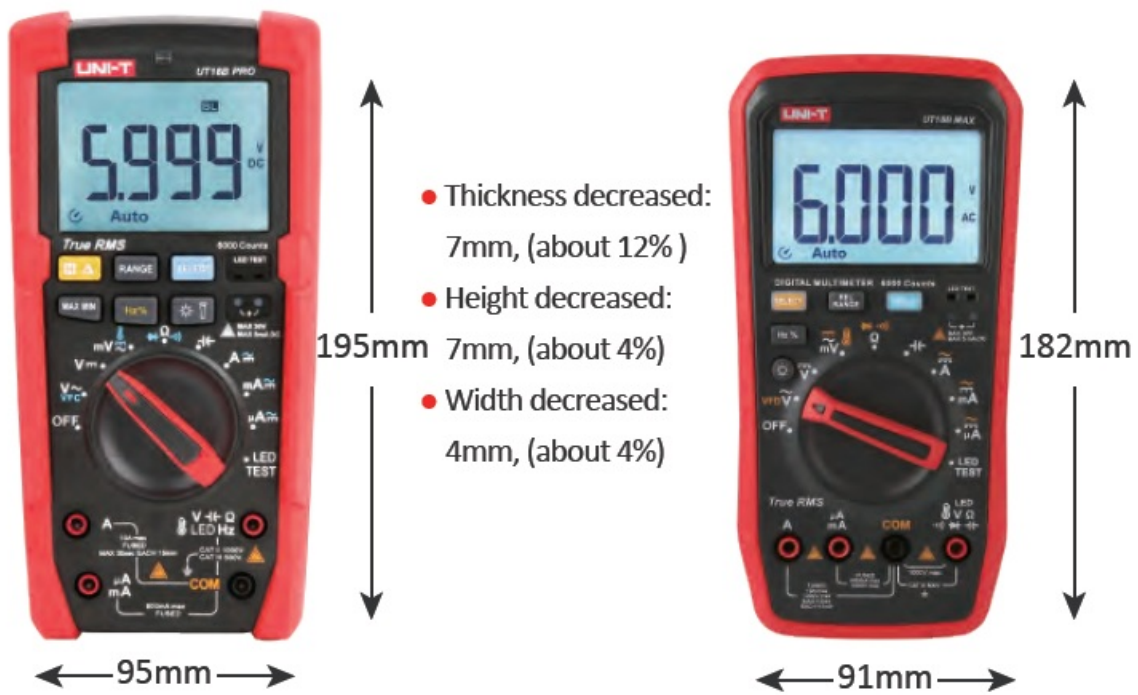

## Fast measurement




## Basic frequency measurement


- it can measure the Bias signal



Source

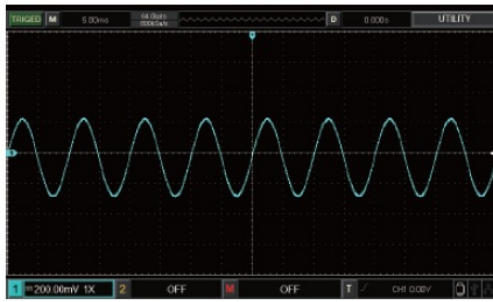

Normal signal

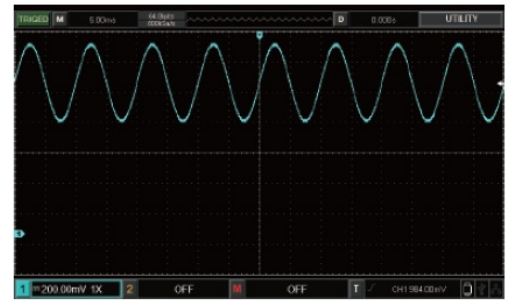

Bias signal



UT15B/17B/18B  
MAX series

Competitor



Measurement  
correct

Can't measure


- Using scenarios: Electronic product manufacturing and maintenance, such as Crystal oscillator frequency measurement

### Mis-plug alarm (LED)




### Full range input protection (2 fuses)



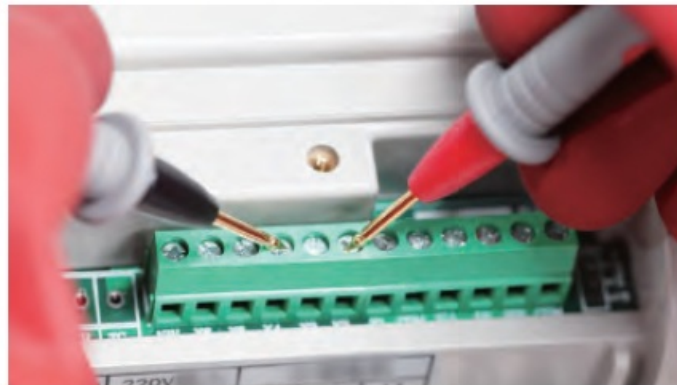


Normal probe (gold-plated)

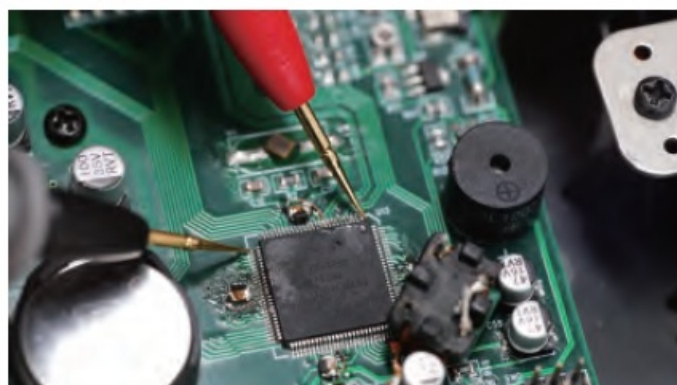

Fine-tipped probe (gold plated)


Using Scenarios

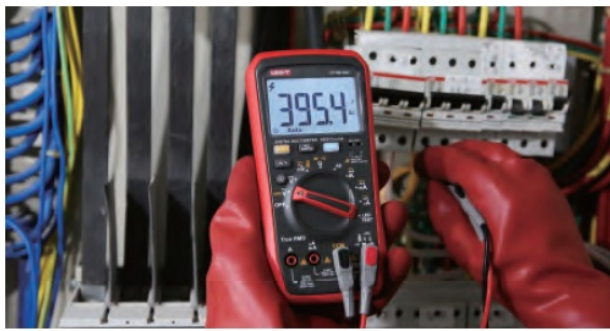

Voltage measurement (AC)



VFD function (Frequency)

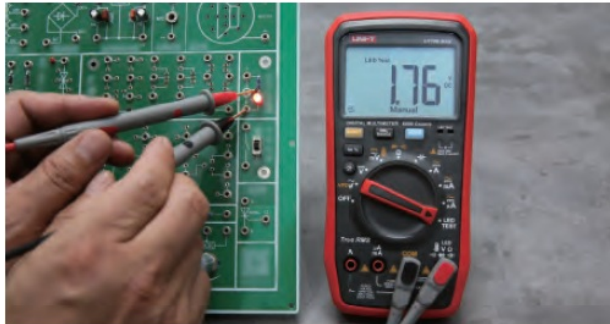

LED test (UT18B MAX only)



Temperature measurement (UT17B/18B MAX)

## Technical Specifications

Models		UT15B MAX	UT17B MAX	UT18B MAX
Voltage (DC)	600.0mV/6.000V/60.00V/600.0V/1000V	±(0.4%+3)	±(0.4%+3)	±(0.4%+3)
Voltage (AC)	600.0mV/6.000V/60.00V/600.0V/1000V	±(0.5%+5)	±(0.5%+5)	±(0.5%+5)
VFD (Voltage)	600.0V	±(8%)	±(8%)	±(8%)
Current (AC)	600.0μA/6000μA /60.00mA/600.0mA/6.000A/10.00A	±(1.2%+3)	±(1.2%+3)	±(1.2%+3)
Current (DC)	600.0μA/6000μA /60.00mA/600.0mA/6.000A/10.00A	±(1.2%+3)	±(1.2%+3)	±(1.2%+3)
Resistance	600.0Ω/6.000kΩ/60.00kΩ /600.0kΩ/6.000MΩ/60.00MΩ	±(0.5%+2)	±(0.5%+2)	±(0.5%+2)
Capacitance	6.000nF/60.00nF~600.0μF/6000μF	±(2.0%+5)	±(2.0%+5)	±(2.0%+5)
Frequency (Hz)	10Hz~10MHz	±(0.1%+3)	±(0.1%+3)	±(0.1%+3)
Duty cycle	1%~99.9%	±(1.0%+4)	±(1.0%+4)	±(1.0%+4)
Temperature (°C/°F)	-55°C~500°C/-67°F~932°F		±2°C/±4°F	±2°C/±4°F

Main features				
Display count		6000	6000	6000
Continuity/Diode		√	√	√
Data hold		√	√	√
MAX/MIN		√	√	
Relative mode		√	√	√
Backlight (adjustable)		√	√	√
Auto range/Manual range		√	√	√
Auto power off		√	√	√
Low battery indication		√	√	√
Audible & Visual alarm		√	√	√
LED test				√
Mis-plug alarm		√	√	√
Any-key wake up		√	√	√
Overvoltage category		CAT III 600V	CAT III 600V	CAT III 600V
General Characteristics				
General Characteristics				
Power supply		2 x 1.5V AA	2 x 1.5V AA	2 x 1.5V AA
Product color		426U+1797C	426U+1797C	426U+1797C
Product weight		455g	455g	455g
Product dimension		182 x 91 x 45mm	182 x 91 x 45mm	182 x 91 x 45mm
Accessories	1pcs User manual, 2 pair Test lead (normal gold plated probe & Fine-tipped probe), 1pcs K-type thermocouple (UT17B/UT18B MAX only), 2pcs battery, Magnetic hanger (optional)			
SPQ		10 pcs	10 pcs	10 pcs
Package dimension		480 x 370 x 195mm	480 x 370 x 195mm	480 x 370 x 195mm
Standard package gross weight		Around 9kg	Around 9kg	Around 9kg

**UNI-TREND TECHNOLOGY (CHINA) CO., LTD.**



No.6, Industrial North 1st Rd., Songshan Lake Park,  
Dongguan, China  
Post Code: 523 808  
Tel: (86-769) 8572 3888

**Documents / Resources**



**[UNI-T UT15B True RMS Digital Multimeter](#)** [pdf] Instruction Manual  
UT15B, UT15B True RMS Digital Multimeter, True RMS Digital Multimeter, RMS Digital Multimeter, Digital Multimeter, Multimeter

## References

-  **[Home - UNI-T Meters | Test & Measurement Tools and Solutions](#)**
- **[User Manual](#)**

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.