

UNICOL
PFT1 Universal
Table Stand



UNICOL PFT1 Universal Table Stand Installation Guide

[Home](#) » [UNICOL](#) » UNICOL PFT1 Universal Table Stand Installation Guide 

Contents

- [1 UNICOL PFT1 Universal Table Stand](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 Installation Steps](#)
- [5 TOOLS REQUIRED](#)
- [6 OVERVIEW](#)
- [7 COMPONENTS](#)
- [8 INSTALLATION](#)
- [9 SCANNER](#)
- [10 MORE INFORMATION](#)
- [11 Frequently Asked Questions](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)
- [13 Related Posts](#)



UNICOL PFT1 Universal Table Stand



Specifications

- **Model:** PFT1 / PFT3 / PFT4 / PFT9 / PFT21
- **Screen Size:** 33-110 inches
- **Maximum Weight Capacity:** 120kg

Product Usage Instructions

Tools Required

1. 5mm Allen Key
2. Pozidrive Screwdriver
3. 17mm Spanner / Socket

Installers Required

1-2 individuals

Components

- 1. Base
- 2. Mast
- 3. Screen Mount Backplate
- 4. Screen Mount Arms

Installation Steps

1. **Step 1:** Identify the base and place it on a solid surface.
2. **Step 2:** Fit the mast to base using the provided screws.
3. **Step 3:** Attach the screen mount backplate to the mast and adjust the height position of the screen.
4. **Step 4:** Attach arms to the back of your screen using grip locks and tag locks.
5. **Step 5:** Lift the screen with another person's help and place the arms onto the backplate.
6. **Step 6:** Secure the bottom of the screen by tightening the bottom arm screws.
7. **Step 7:** Cable up and carry out a functional test to complete installation.

WARNING

Please carefully inspect the product before assembling it. If you notice any apparent damage, call your carrier claims agent and do not continue the installation until it has been reviewed. Please watch for pinch points. Do not put your fingers between moveable parts. Do not tamper with or disassemble any spring-loaded parts. Before installing, make sure that the supporting surface will support five times the combined load of the solution and the hardware. Never exceed the maximum load capacity. Please also lay out all components to ensure that you have all of the required parts before proceeding (see the BOM list on the following page). Use of this product for anything other than its specified use may result in failure or personal injury. This product is intended for indoor use only. We recommend using a qualified tradesperson for installation. Use an assistant or lifting equipment to lift and position products.

For support, please call: +44 (0)1865 767676 or email: sales@unicol.com



TOOLS REQUIRED

- 1 5mm Allen Key
- 2 Pozidrive Screwdriver
- 3 17mm Spanner / Socket


INSTALLERS REQUIRED

- 1-2

OVERVIEW

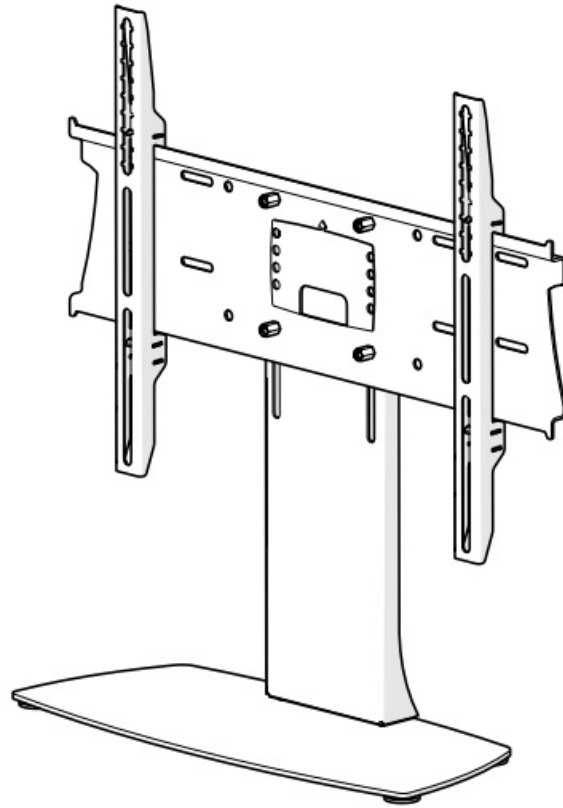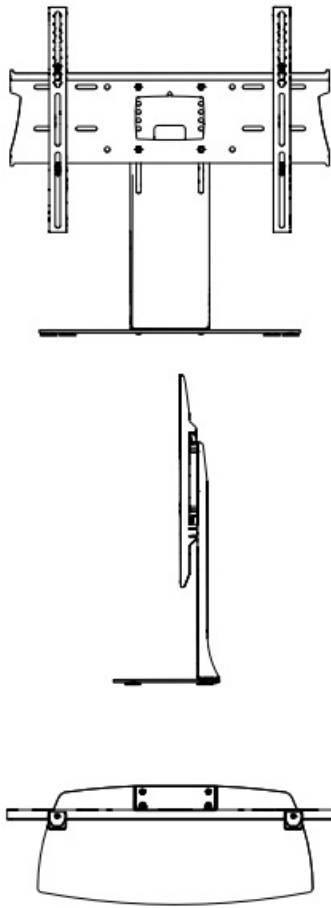


COMPONENTS

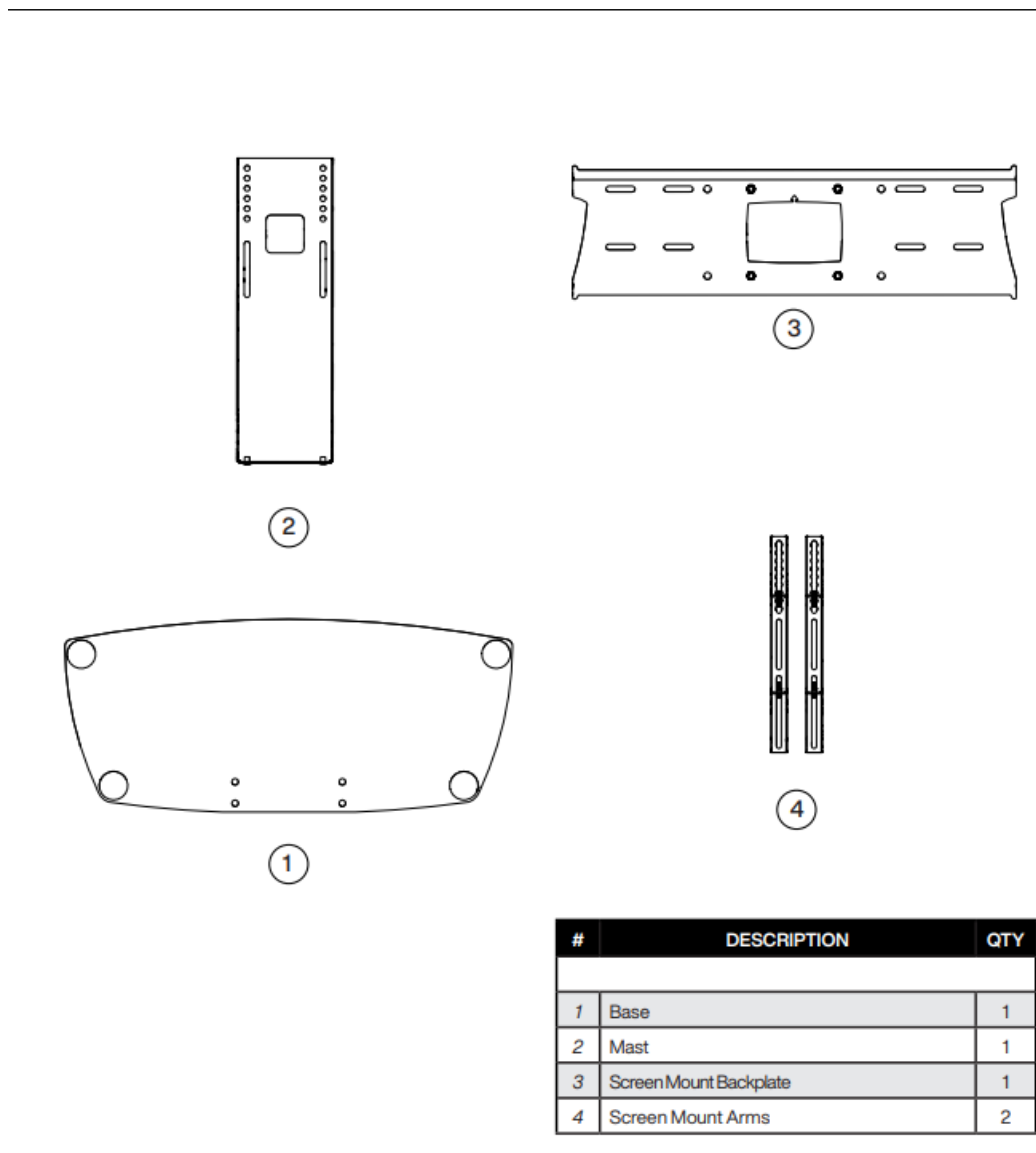

INSTALLATION


- **STEP 1** Identify base and place on a solid surface.
- **STEP 2:** Fit mast to base using the 4 x M8 x 20 dome head allen screws provided. Screw into mast from under the base.

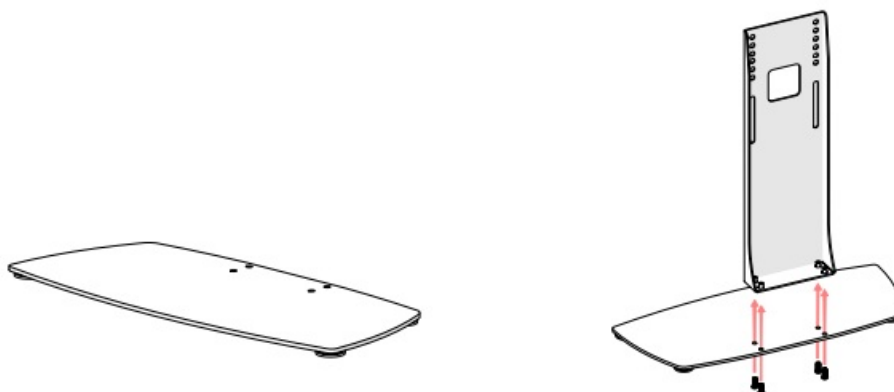

- **STEP 3**
 - Fit the screen mount backplate to the mast using the 4 x M10 x 25 hex screws provided.
 - The height position of the screen is dependent on which holes are used in the mast. Remember to leave enough room for the screen to fit above the base.
 - There is also height adjustment on the screen mount arms if further adjustment is required.

• STEP 4

- Utilising the grip locks (top), tag locks (bottom) and fixing pack provided with your mount, attach the arms to the back of your screen.
- Ensure the arms are the correct way up before tightening – the 'hook' part of the arm should be at the top.

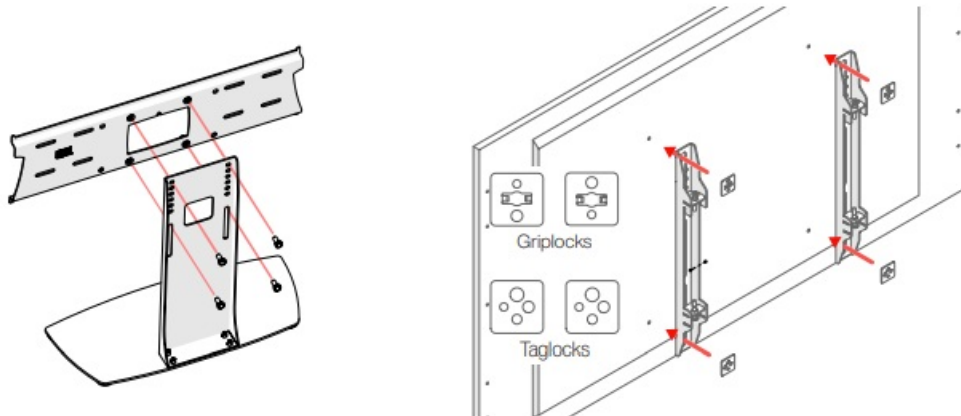


• STEP 5

- Dependent on screen size and weight, with the help of another, lift the screen with top tilted forward and place the hook part of the arms onto the top rail of the backplate. Allow the screen arms to rest on the backplate vertically. While still holding the screen position it centrally on the top rail by sliding it side to side.


• STEP 6

- The bottom of the screen is secured by screwing the bottom arm pozidrive screws so they impinge on the bottom rail of the backplate (do not fully tighten yet).
- There is a small amount of adjustment to level the screen by tightening or loosening one or both top arm screws. Once level tighten all arm screws.

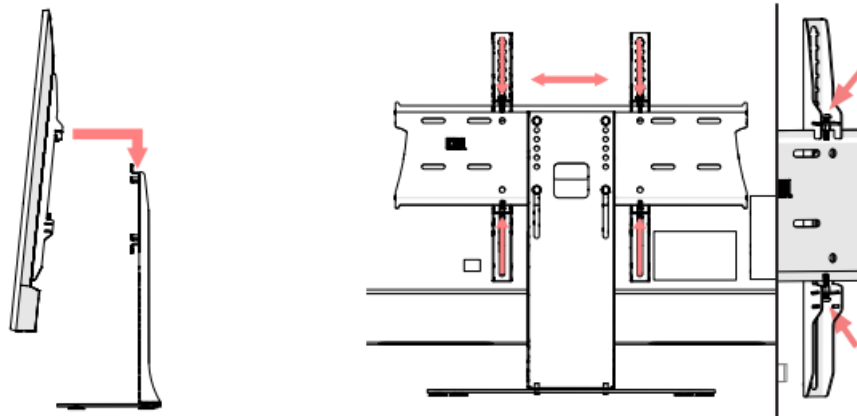

• STEP 7

- Cable up and carry out functional test to complete installation.

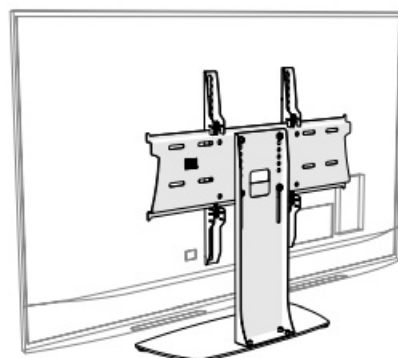

SCANNER



MORE INFORMATION

- 01865 767676
- sales@unicol.com
- www.unicol.com

Frequently Asked Questions

- **Q: What is the maximum screen size supported by this product?**
 - A: The product supports screen sizes ranging from 33 to 110 inches.
- **Q: How much weight can this product hold?**
 - A: The maximum weight capacity of this product is 120kg.

Documents / Resources

	<p>UNICOL PFT1 Universal Table Stand [pdf] Installation Guide PFT1, PFT1 Universal Table Stand, Universal Table Stand, Table Stand, Stand</p>
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.