



V I V O STAND-V002T-W Dual Vertically Stacked LCD Monitor Desk Mount Instruction Manual

[Home](#) » [V I V O](#) » V I V O STAND-V002T-W Dual Vertically Stacked LCD Monitor Desk Mount Instruction Manual



Contents

- 1 V I V O STAND-V002T-W Dual Vertically Stacked LCD Monitor Desk Mount
- 2 Product Information
- 3 Product Usage Instructions
- 4 PACKAGE CONTENTS
- 5 ASSEMBLY STEPS
- 6 Adjust as Desired
- 7 Documents / Resources
 - 7.1 References



V I V O STAND-V002T-W Dual Vertically Stacked LCD Monitor Desk Mount



Product Information

Specifications

- **SKU:** STAND-V002T/W
- **Weight Capacity:** 22 lbs (10 kg) per arm
- Supports dual monitors
- Comes with VESA plates, brackets, clamp, poles, cable clips, grommet base, and screws

Product Usage Instructions

Step 1: Attach Pole Cap to Upper Pole

Take the Upper Pole (E) and attach the Pole Cap (F) to the top of it.

Step 2: Clamp Installation or Grommet Base Installation

Option A: Clamp Installation

1. Stick Rubber Pads (J) to the underside of the Clamp (C).
2. Attach the Lower Pole (D) to the Clamp (C) using M6x16mm Screws (S-A).
3. Tighten the screws using a 4mm Allen Wrench (T-B).
4. Attach the Clamp (C) to your desktop.

Option B: Grommet Base Installation

1. For grommet hole mounting, remove the screw in the top of the bolt on the Clamp (C).
2. Stick Rubber Pads (J) to the bottom of the Grommet Base (I).
3. Attach the Support Plate (K) to the bolt and run it through the grommet hole into the Grommet Base (I).
4. Thread the bolt into the Lower Pole (D) as shown in the diagram.

Step 3: Attach Cable Clip and Bracket to Lower Pole

Slide the Cable Clip (H) and Bracket (B) onto the Lower Pole (D) and tighten them using a 6mm Allen Wrench (T-C).

Step 4: Connect Upper Pole to Lower Pole

Attach the Upper Pole (E) to the Lower Pole (D) using the Pole Connector (G). Tighten the grub screws in the pole connector using a 3mm Allen Wrench (T-A). Slide the remaining Cable Clip (H) and Bracket (B) onto the Upper Pole (E) and tighten them using a 6mm Allen Wrench (T-C).

Step 5: Attach VESA Plates to Monitors

Option A: Flat Back Monitor

1. Attach the VESA Plates (A) to the back of your monitors using the appropriate Screws (M-A, M-C) and Washers (M-E).

Option B: Curved Back Monitor

1. Attach the VESA Plates (A) to the back of your monitors using the appropriate Screws (M-B or M-D).
2. If the screws are too long, Spacers (M-F) may be required.

Step 6: Secure Monitors to Brackets

Slide the VESA Plates (A) into the Brackets (B) and secure them using Thumb Screws (S-B).

Step 7: Adjust Monitor Tension

Use a 6mm Allen Wrench (T-C) to adjust the tension in the monitor brackets.

Step 8: Cable Management

Run your cables through the Cable Clips (H) for a tidy setup.

Step 9: Store Allen Wrenches

Store the Allen Wrenches (T-A, T-B, T-C) in the cable management clips (H) for future adjustments.

FAQ

- **Q: What is the weight capacity of this dual monitor desk mount?**
 - A: The weight capacity is 22 lbs (10 kg) per arm.
- **Q: Can this desk mount support curved back monitors?**
 - A: Yes, it can support both flat back and curved back monitors. If the screws are too long, spacers may be required for curved back monitors.
- **Q: How can I contact customer support?**
 - A: You can contact our dedicated support team Monday-Friday from 7:00am-7:00pm CST via email at help@vivo-us.com, phone at 309-278-5303, or live chat on our website www.vivo-us.com.

SKU: STAND-V002T/W

Scan the QR code with your mobile device or follow the link for helpful videos and specifications related to this product.

- <https://vivo-us.com/products/stand-v002t>



GET IN TOUCH | Monday-Friday from 7:00am-7:00pm CST

- help@vivo-us.com
- www.vivo-us.com Chat live with an agent!
- 309-278-5303

WARNING!

If you do not understand these directions, or if you have any doubts about the safety of the installation, please call a qualified technician. Check carefully to make sure there are no missing or defective parts. Improper installation may cause damage or serious injury. Do not use this product for any purpose that is not explicitly specified in this manual. Do not exceed weight capacity.

We cannot be liable for damage or injury caused by improper mounting, incorrect assembly or inappropriate use.

TIPOVER WARNING

SERIOUS OR FATAL CRUSHING INJURIES CAN OCCUR FROM TIPOVER.

TO HELP PREVENT TIPOVER

- NEVER ALLOW CHILDREN TO CLIMB, STAND, HANG, OR PLAY ON ANY PART OF MONITOR OR STAND.
- USE TIPOVER RESTRAINT OR ANCHOR STAND TO WALL

USE OF TIPOVER RESTRAINTS MAY ONLY REDUCE, BUT NOT ELIMINATE RISK OF TIPOVER.


WARNING: CHOKING HAZARD

SMALL PARTS – NOT FOR CHILDREN UNDER 3 YEARS. ADULT SUPERVISION IS REQUIRED.

PACKAGE CONTENTS



A (x2)
VESA Plate



B (x2)
Bracket



C (x1)
Clamp



D (x1)
Lower Pole



E (x1)
Upper Pole



F (x1)
Pole Cap



G (x1)
Pole Connector



H (x2)
Cable Clip



I (x1)
Grommet
Race



J (x5)
Rubber Pad




K (x1)
Support Plate




S-A (x3)
M6x16mm
Screw




S-B (x2)
Thumbscrew




M-A (x8)
M4x12mm
Screw



M-B (x8)
M4x16mm
Screw



M-C (x8)
M5x12mm
Screw



M-D (x8)
M5x16mm
Screw



M-E (x8)
M5 Washer



M-F (x8)
Spacer



T-A (x1)
3mm Allen Key



T-B (x1)
4mm Allen Key



T-C (x1)
6mm Allen Key


TOOLS NEEDED



- DO NOT EXCEED WEIGHT CAPACITY.
- Failure to do so may result in serious injury.


ASSEMBLY STEPS

- **STEP 1** Attach Pole Cap (F) to top of Upper Pole (E).

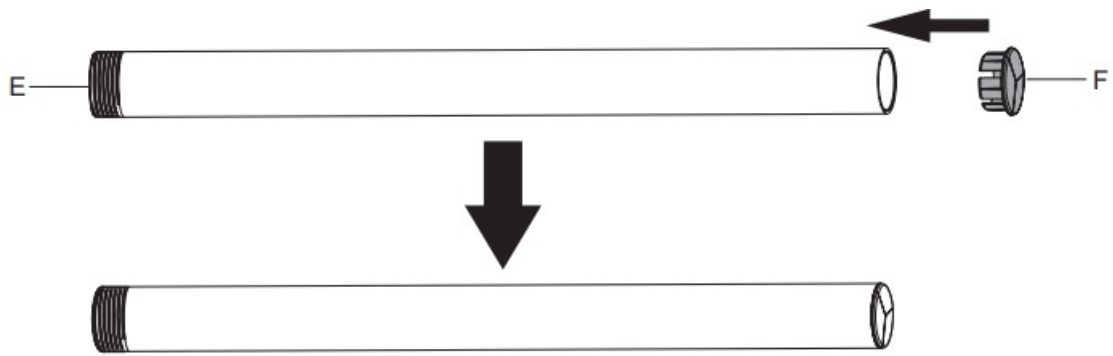


• STEP 2


- **OPTION A: Clamp Installation**
- Stick Rubber Pads (J) to the underside of Clamp (C). Attach Lower Pole (D) to Clamp (C) using M6x16mm Screws (S-A). Tighten using 4mm Allen Wrench (T-B). Attach Clamp (C) to desktop.

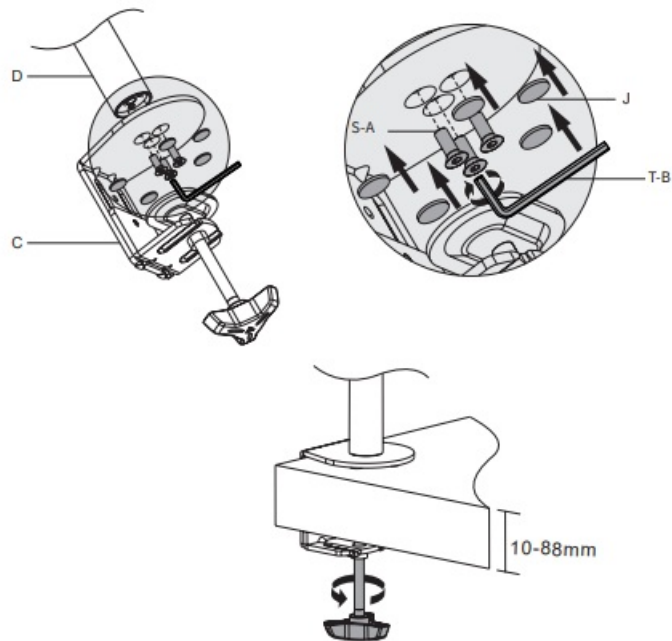


- **OPTION B: Grommet Base Installation**
- For grommet hole mounting, remove screw in top of bolt on Clamp (C). Stick Rubber Pads (J) to bottom of Grommet Base (I). Attach Support Plate (K) to bolt and run through grommet hole into Grommet Base (I) and thread into Lower Pole (D) as shown in diagram.

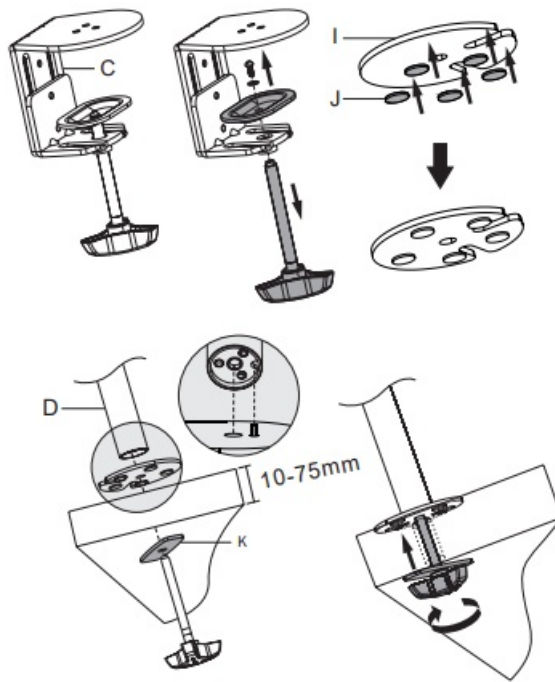

- **STEP 3** Slide Cable Clip (H) and Bracket (B) onto Lower Pole (D) and tighten using 6mm Allen Wrench (T-C).

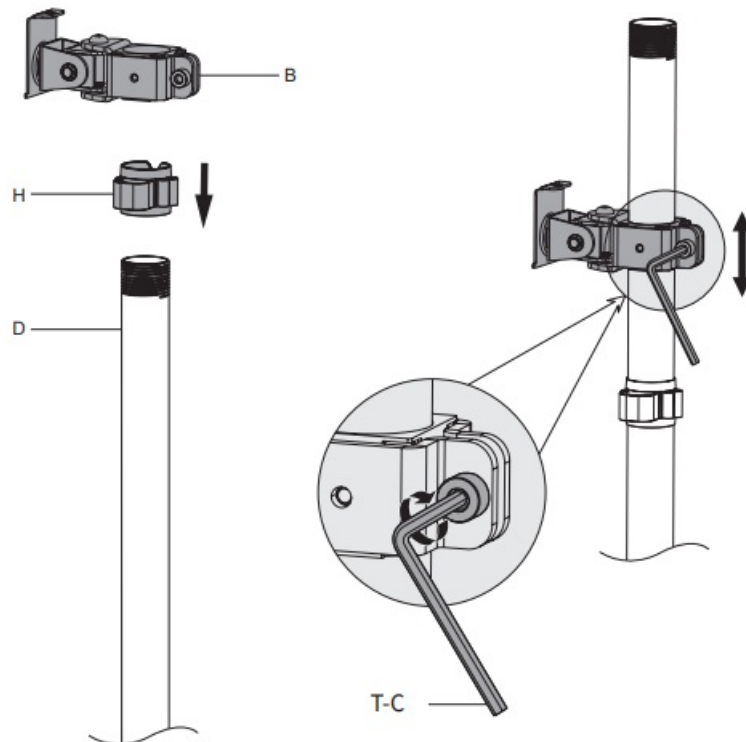


- **STEP 4** Attach Upper Pole (E) to Lower Pole (D) using Pole Connector (G). Tighten grub screws in pole connector using 3mm Allen Wrench (T-A). Slide remaining Cable Clup (H) and Bracket (B) onto Upper Pole (E) and tighten using 6mm Allen Wrench (T-C).

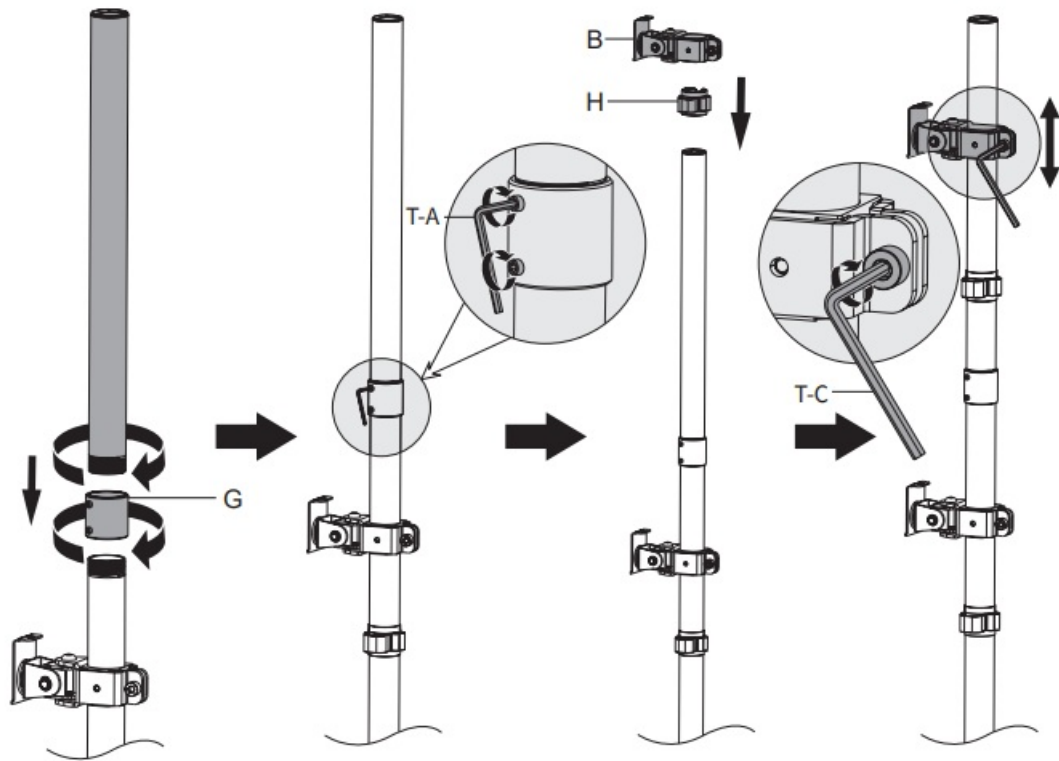

• **STEP 5 OPTION A: Flat Back Monitor**



- Attach VESA Plates (A) to back of monitors using appropriate Screws (M-A, M-C) and Washers (M-E).

•

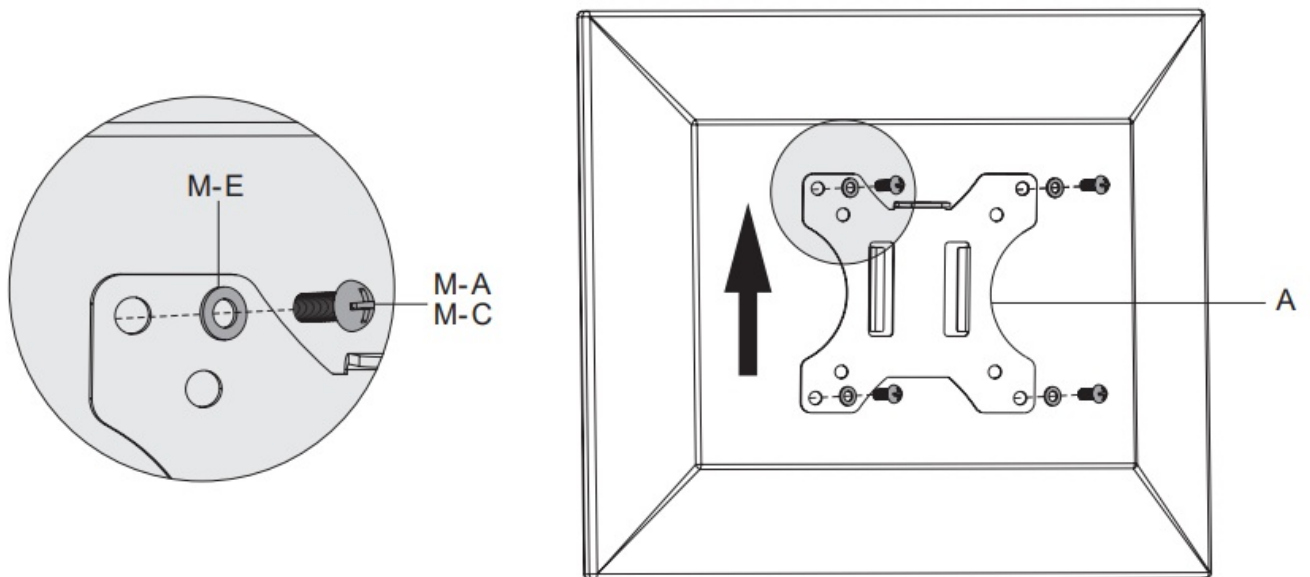


OPTION B: Curved Back Monitor


- Attach VESA Plates (A) to back of monitors using appropriate Screws (M-B or M-D). If screws are too long, Spacers (M-F) may be required.

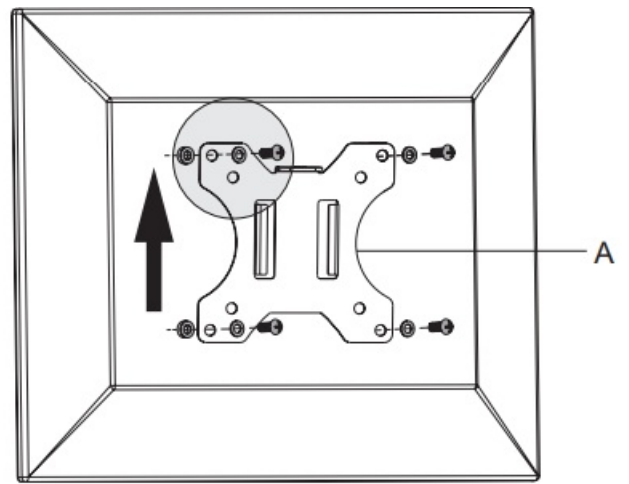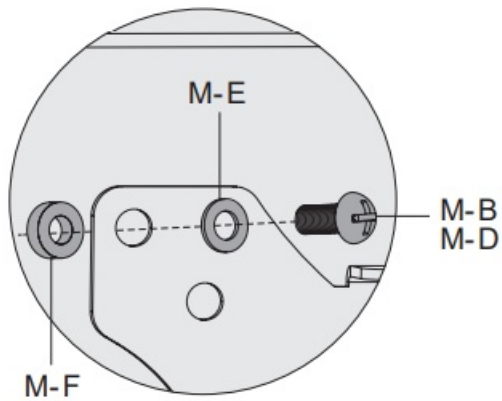


- **STEP 6** Slide VESA Plates (A) into Brackets (B) and secure using Thumb Screws (S-B) as shown in diagram.

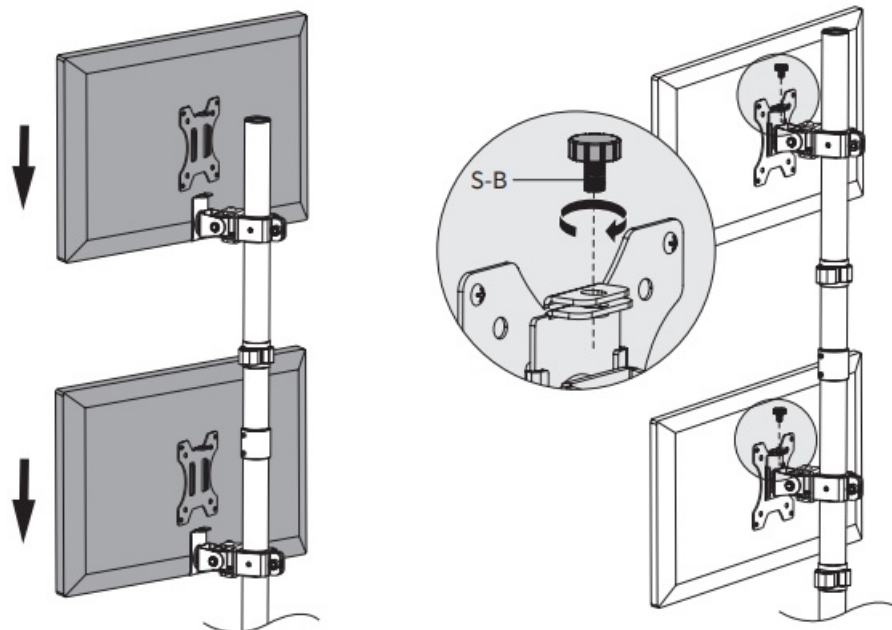


- **STEP 7** Adjust tension in monitor bracket with 6mm Allen Wrench (T-C).

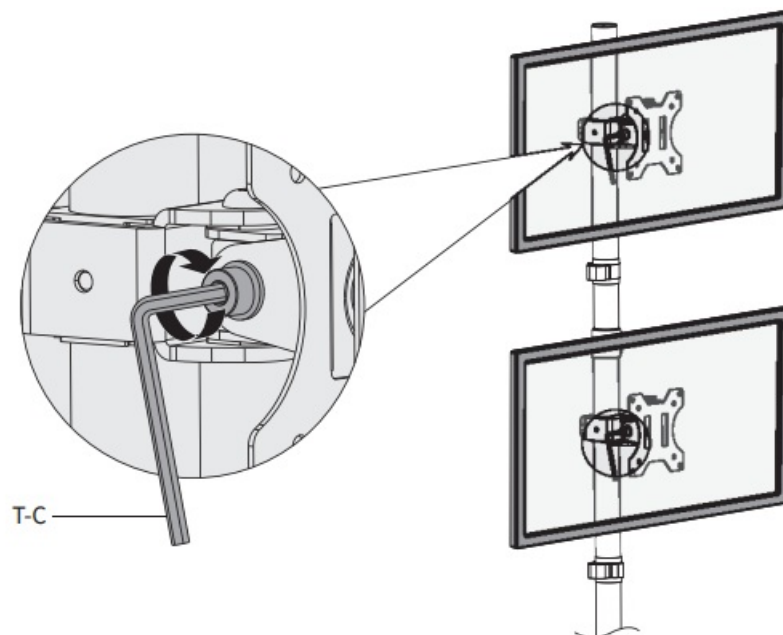


- **STEP 8** Run cables through Cable Clips (H).

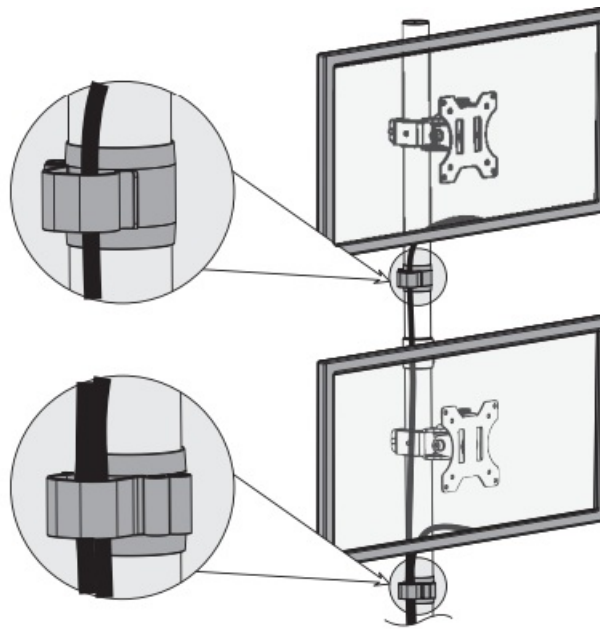

- **STEP 9** Store Allen Wrenches (T-A, T-B, T-C) in cable management clips (H) for future adjustments.

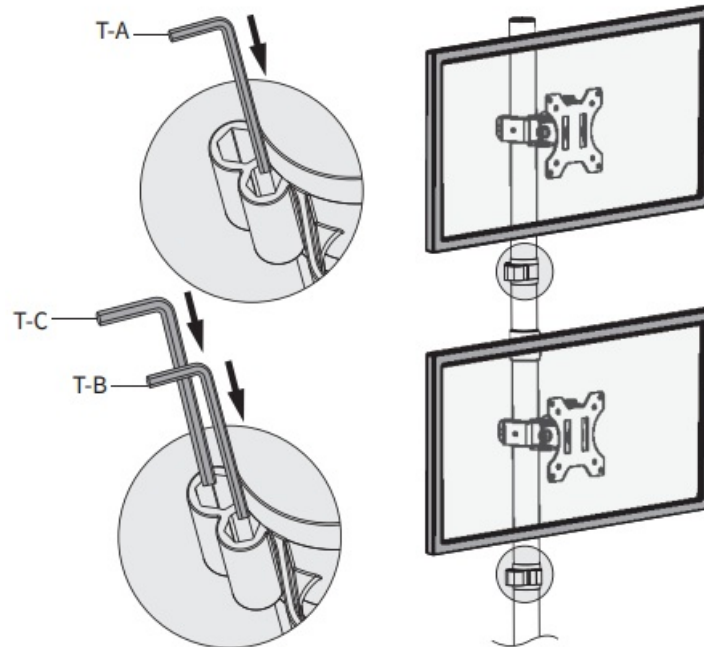

Adjust as Desired

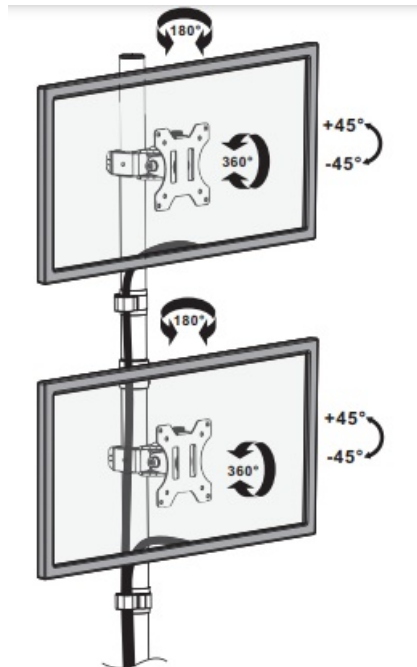

- Love your new VIVO setup and want to share? Tag us in your photo! @vivo_us
- **LAST UPDATED:** 03/24/2023 REV1



- Open Monday – Friday 7:00am – 7:00pm CST, our dedicated support team can offer immediate assistance with rapid response times. If any parts are received damaged or defective, please contact us.


We are happy to replace parts to ensure you have a fully functioning product.

- **309-278-5303**
- **AVG. RESOLUTION TIME (within office hrs): 5M 4S**
- www.vivo-us.com Chat live with an agent!
- **AVG. RESOLUTION TIME (within office hrs): < 15 M**
- help@vivo-us.com
- **AVG. RESPONSE TIME (within office hrs): 1HR 8M**
 - 23% within < 15m
 - 38% within < 30m
 - 61% within < 1hr
 - 83% within < 2hr

- 92% within < 3hr

FOR MORE VIVO PRODUCTS, CHECK OUT OUR WEBSITE AT: www.vivo-us.com

Documents / Resources

	<p>V I V O STAND-V002T-W Dual Vertically Stacked LCD Monitor Desk Mount [pdf] Instruction Manual</p> <p>STAND-V002T-W, STAND-V002T-W Dual Vertically Stacked LCD Monitor Desk Mount, Dual Vertically Stacked LCD Monitor Desk Mount, Vertically Stacked LCD Monitor Desk Mount, Stacked LCD Monitor Desk Mount, LCD Monitor Desk Mount, Monitor Desk Mount, Desk Mount, Mount</p>
---	---

References

- [🌐 Register a .US.COM domain today!](#)
- [🕒 VIVO - Desks, Monitor Mounting, and More Home & Office Solutions – VIVO - desk solutions, screen mounting, and more](#)
- [🕒 Dual Monitor Desk Mount – VIVO - desk solutions, screen mounting, and more](#)
- [🕒 User Manual](#)