



VIDEX VLFH056 1400 MAX LUMENS Power Bank Function Instructions

[Home](#) » [VIDEX](#) » VIDEX VLFH056 1400 MAX LUMENS Power Bank Function Instructions 

Contents

- [1 VIDEX VLFH056 1400 MAX LUMENS Power Bank Function](#)
- [2 TECHNICAL PARAMETERS](#)
- [3 FEATURES](#)
- [4 MAIN FEATURES](#)
- [5 INCLUDED](#)
- [6 OPERATING INSTRUCTION](#)
- [7 CHARGING](#)
- [8 BATTERY REPLACEMENT](#)
- [9 QR CODE](#)
- [10 WARRANTY](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)

VIDEX


VIDEX VLFH056 1400 MAX LUMENS Power Bank Function




TECHNICAL PARAMETERS

- Output.
- Runtime.
- Distance.
- Intensity.
- Correlated color temperature.
- LED type.
- Compatible battery.
- Charging port type, voltage and current.
- Charging time.
- Dust and moisture protection level.
- Impact resistance.
- Product sizes.
- Product weight (without batteries).
- Color: black.
- Optical system type: textured refl ector
- Materials: polyamide, polycarbonate

		HIGH*	LOW	STROBE	RED ON	RED FLASH
1		1400Lm	170Lm	1400Lm	4Lm	4Lm
2		2h 30min	14h 30min	3h	18h 30min	31h
3		161m	57m	161m	-	-
4		6480cd	800cd	6480cd	-	-
5		6500 K				
6		LUMINUS SST40 20W				
7		2x Li-ion 18650, 3.7V				
8		IN (USB-C, 5V 2A); OUT (USB2.0, 5V 2A)				
9		3 h				
10		IP65				
11		1m				
12		65x48x32 mm				
13		171 g (without battery)				

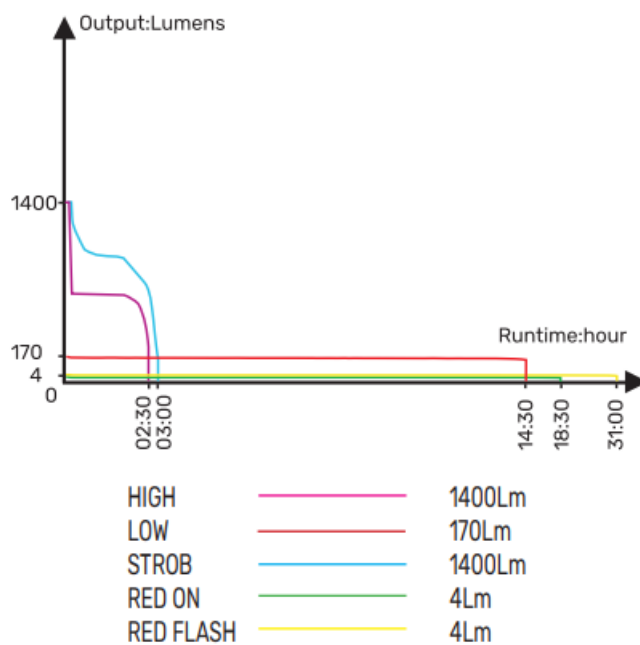

FEATURES

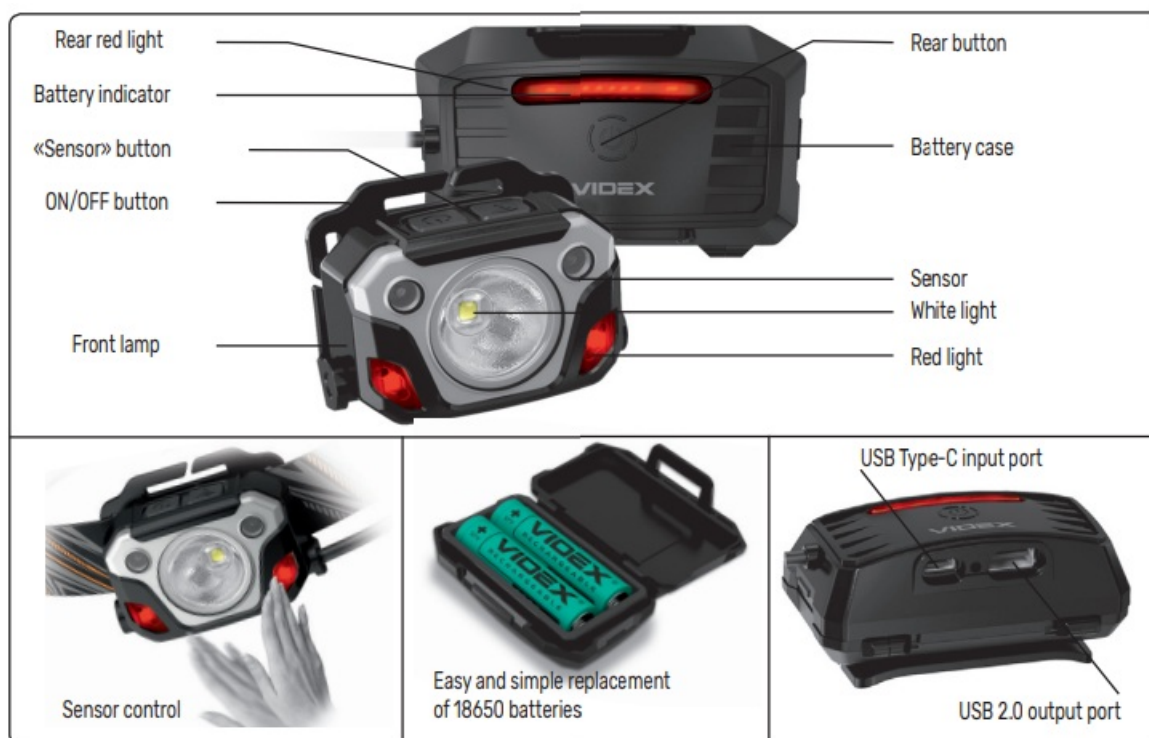

MAIN FEATURES

- Maximum brightness 1400 lumens with powerful LED
- Built-in motion sensor for swift turning on/off
- Additional USB output with power bank function.
- Water resistance IP65 (protected from all precipitation)
- Front and rear signal red lights

INCLUDED

- Headlamp VLF-H056;
- Charging cable;
- Nylon headband;
- Li-ion rechargeable batteries Videx 18650 2200 mAh 2pcs
- User's manual.

LIGHTING MODES

- High – maximum brightness
- Low – minimum brightness
- Strobe – flashing light
- Red on – constant red light
- Red flash – flashing red light

OPERATING INSTRUCTION

- **Short press button** – turn on the light, cyclically switch between modes and turn off the light. Long press (0.5

seconds) button with the light switched on – remember current mode and switch the light off .

- **Short press again** – turn on the last remembered mode. Short press button with the light switched off – activate the sensor mode. A blue indicator informs that the sensor is activated. After that, you can control the light by a hand waves closely to the device:
- **1st waving** – turn ON Low mode
- **2nd waving** – turn on High mode;
- **3rd waving** – turn Off the light. Short press button with the light switched on – remember current lighting mode and later switch it on/off by the sensor
- **Lock/unlock** – with the light switched off , press and hold the and the buttons together for 3 seconds to lock the headlamp (the headlamp will respond by appropriate double fl icker). Repeat the same operation to unlock.

BATTERY STATUS INDICATION

With the light and sensor switched off , long touch the rear button for 1 second to see the battery status. The indication will last for 3 seconds. The battery status is also continuously displayed when the light or sensor are turned on. 5 divisions – $\leq 100\%$ charge;

- 4 divisions – $\leq 80\%$ charge;
- 3 divisions – $\leq 60\%$ charge;
- 2 divisions – $\leq 40\%$ charge;
- 1 division – $\leq 20\%$ charge
- 1 division fl ashes – battery discharged.

CHARGING

Plug the USB-A socket of the charging cable into electrical outlet. Switch off the light, open the protective cover and connect the charging cable to the fl ashlights USB-C input port. When charging, the divisions fl ash indicating the current battery level. When fully charged, all 5 indicator bars are constantly on. After a full charge, unplug the charging cable and close the protective cover to prevent water and dust from entering inside. © The original rechargeable batteries are supplied charged and can be used immediately after purchase, however it is recommended that the battery be fully charged before fi rst use. The battery needs to be charged in time before it is completely discharged. During long periods of storage, it is recommended to keep the battery charging level at about half capacity to extend its service life.

CHARGING EXTERNAL DEVICES

The rear battery case has an additional USB 2.0 output port that allows you to charge external devices, such as mobile phone, smart watch, tablet etc. Switch off the light, open the protective cover and plug the USB-A socket of the charging cable to the fl ashlights output port. Then connect the charging cable to the input port of the external charging device. After charging fi nished, unplug the charging cable and close the protective cover to prevent water and dust from entering inside.

BATTERY REPLACEMENT

- Pull up the lock located on top of the battery case and open the back lid;
- Insert compatible batteries according to the diagram shown on the inside of the battery case;
- Close the lid until it snaps and test the headlamp.

MAINTENANCE AND SAFETY INSTRUCTIONS

- For long-term storage, it is necessary to remove the batteries from the headlamp.
- It is recommended to keep the battery case contacts clean to maintain the original performance.
- Lock the headlamp to avoid accidental activation during carrying and storage
- Avoid direct shining into eyes as it may cause the eyes damage.
- The headlamp can accumulate a significant amount of heat when used for a long time, which can cause the body to become hot.
- Therefore, be careful to avoid burns.
- It is forbidden to shine the headlamp in a critical proximity to easily flammable substances in order to avoid fire.
- Do not use batteries other than those specified in the technical specifications.
- Do not disassemble the sealed body of the headlamp as this may compromise performance and void the warranty.
- Keep out of the reach of children.

ENVIRONMENTAL PROTECTION

ENVIRONMENTAL PROTECTION Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health. The producer shall not be responsible for any damage resulting from the failure to follow above instructions. The producer reserves the right to make updates of this user's manual.

QR CODE

Producer/Producent: Allegro Opt Sp. z o.o., Handlowa 23, 05-120 Legionowo, Poland. Made in P.R.C.




WARRANTY

The warranty for the headlamp is 3 years, for the batteries – 1 year. The warranty does not cover accessories. The LED light source inside the headlamp is not replaceable. If the LED fails, the whole headlamp should be replaced. During the warranty period, a faulty headlamp and the batteries can be exchanged or returned with a proof of purchase and all accessories saved. The following does not apply with the scope of limited warranty: –

- Misuse the product and cause the product's integral components damage
- Unauthorized disassembly or the presence of deep mechanical damage to the product
- Damage due to force majeure

Documents / Resources

	<p>VIDEX VLFH056 1400 MAX LUMENS Power Bank Function [pdf] Instructions</p> <p>VLF 056 1400 MAX LUMENS Power Bank Function, VLF 056, VLF 056 Power Bank Function, 1400 MAX LUMENS Power Bank Function, LUMENS Power Bank Function, LUMENS Power Bank, Power Bank, Power Bank Function</p>
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

References

-  [Manufacturer of lighting in Poland - VIDEX](#)
-  [Офіційний інтернет-магазин Videx.ua](#)