

VEVOR

Affordable. Reliable. Home Improvement.

ROOF BIKE RACK

MODEL:CT-5669B

VEVOR

Affordable. Reliable. Home Improvement.

ROOF BIKE RACK

MODEL:CT-5669B



<Picture Only For Reference >

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

IMPORTANT SAFEGUARDS



WARNING: Read and understand this entire manual before operating or servicing this product. Failure to follow these warnings and instructions can cause personal injury or damage to valuable property.

- Avoid children using the product. And this product is not a toy. Do not allow children to play.
- It is highly recommended that you go to a professional car modification service shop for replacement installation.

ASSEMBLY PRECAUTIONS










1. Assemble only according to these instructions. Improper assembly can create hazards.
2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly and use.
3. Keep the assembly area clean and well-lit.
4. Keep bystanders out of the area during assembly.
5. Do not assemble when tired or when under the influence of alcohol, drugs or medication.
6. Product capabilities apply to properly and completely assembled products only.
7. For additional information regarding the parts listed in the following pages, please refer to the Assembly Diagram of this manual. Unwrap and separate all parts in a clean work area. Please keep small spare parts out of children's reach.

SAVE THESE INSTRUCTIONS

SPECIFICATION

Model	CT-5669B
Material	Aluminum+steel+plastic
Color	Black
Fixed number of bikes	One
Wheel diameter	20~29in(508~737mm)
Fit wheel width	Max2.5in(63.5mm)


PACKAGE LIST

No.	Name	Picture	QTY
1	Main body		1
2	Square screw-long		1
3	Square screw-short		2
4	Lockable fastener with T-screw		1
5	U-screw with tri-wing nut		2
6	Spacer		2
7	C hook		1
8	Rubber pad		2
9	Key		2
10	Manual		1


2 How to install the bike rack on the cross bar

Note:

- Before installation, please check your cross bar.
- ※ If the cross bar is without slot and the width is less than 6cm, please use the fittings U -screw and C hook.

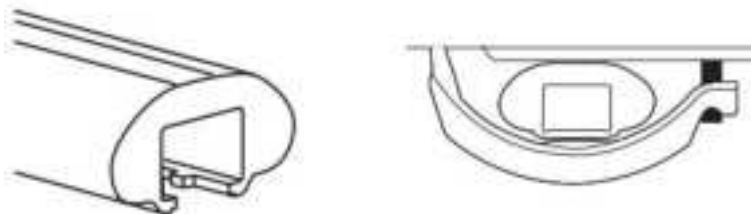


- ※ If the width of the cross bar is more than 6cm, and with slot, please use the fittings square-screw.

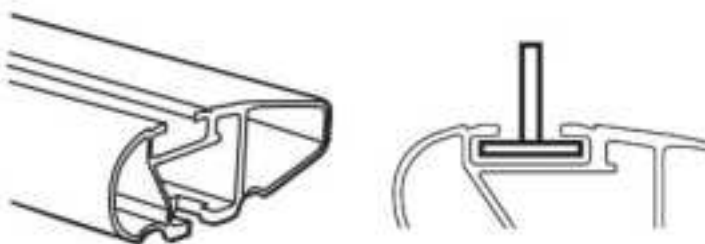

20 mm T-track

- Attaching to crossbar: Open up and check the hatchback does not hit the end of the Wheel Tray.

Note the mounting distance of the roof bar.

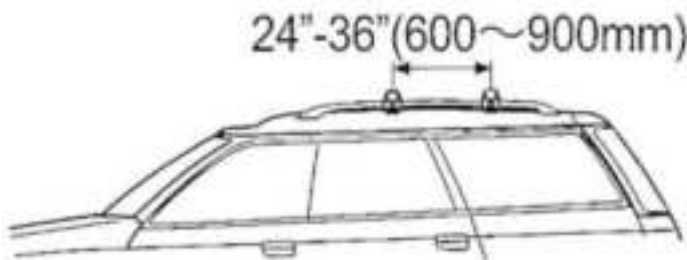

U-screw and C hook installation steps

1.1. Put the bike rack on the cross bar and adjust its position.



Fig.1.1

1.2. Assemble the spacer into the U-screw as shown(Fig.1.2), put it on the front plate, and turn the tri-wing to tight.



Fig.1.2

1.3. Put the C hook into the hole of the rear plate and around the cross bar, use T-screw to connect the C hook across the hole as shown(Fig.1.3). Use the lockable fastener to rotate clockwise until it is a little hard to button up. Use the key to lock.



Fig.1.3

2 Square-screw installation steps:

2.1. Put two short square screws in the slot of one bar, and long square screw on the other bar. Adjust its position properly.



Fig.2.1

2.2. Put the bike rack on the cross bar according to the position of the screws. Using tri-wing nut to tighten the front plate on the bar.



Fig.2.2

2.3. Use the lockable fastener to rotate clockwise until it is a little hard to button up. Use the key to lock.



Fig.2.3

Note:

When installing on cross bar (width is more than 6cm) please use the rubber pad to cover the nut under the front plate to avoid scratches while installing as shown(Fig.2.4).



Fig.2.4

3 How to install the bike on the rack

3.1. Loosen the wheel belt and open the lockable frame.



Fig.3.1

3.2. Put the bike on the rack, adjust the wheel cradle into proper position to catch the wheel as shown.



Fig.3.2

3.3. Use the belt around the bike wheel and fasten it, fix the lockable frame on the bike frame, and turn the button clockwise until it is up to tight and lock.

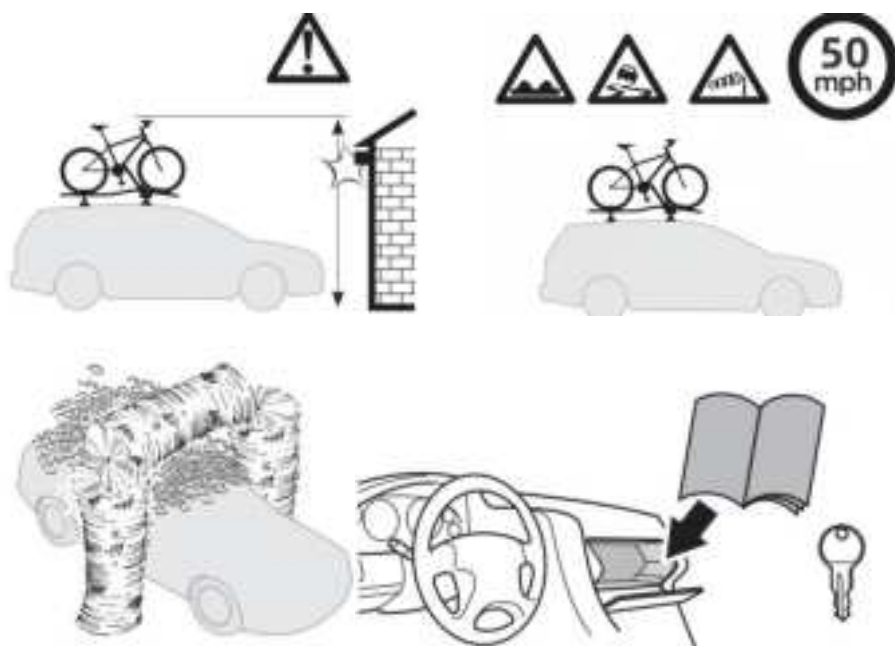


Fig.3.3

Finish installation



Caution



Safety information:

- Check the screws for the first time after driving a short distance and then at regular intervals.
- Please note that the load on the roof will change the driving properties of your vehicle during braking, in the case of side winds, and when driving around bends.
- Adjust your driving speed accordingly. In particular, observe the information provided by the manufacturer of the vehicle about the permitted roof loads.
- Parts of the cycles, such as handlebars or pedals, should not protrude over the edge of the roof.
- If not needed, the cycle rack should be dismantled for reasons of safety for other road users and the economy (petrol consumption).

CAUTION:

When the cycle is mounted, note the greater height of your vehicle when entering underground car parks tunnels etc. Before setting off on your journey, always check that the attachments are all correct.

IMPORTANT: Always use the supplied holding belt.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.

Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia

Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP
----	-----

YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147,
Centurion House, London Road,
Staines-upon-Thames, Surrey, TW18 4AX

EC	REP
----	-----

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.

