



16 Channel Network Video Recorder

MODEL: VIGI NVR2016H



H.265+

VIGI NVR2016H

4K HDMI Output

Provides Finer Details and Crystal Clarity

Quick Playback

16-Channel Synchronous Playback*

2 SATA Interfaces

Up to 16 TB Capability for Each HDD**

Remote Management

Dedicated VIGI app and PC Client

ONVIF

Comprehensive Compatibility

Overview

VIGI Surveillance Solution

The VIGI network video recorder coordinates with camera systems to help you view, store, and play back videos.

Highlight



16-Channel Live View

Ensure a real-time display of every monitored area on one screen and take everything under your control.



Streamlined Setup

Simply connect your VIGI NVR and VIGI cameras to a switch, and plug in a monitor, then you're ready to go.



4K HDMI Output

Show more details with up to 8MP resolution for one channel and 20MP decoding capacity in total for all channels.



Remote Management

Take full control over your security anytime and anywhere on the VIGI app or PC client.



Practical Playback


Find the target footage easily by date, event types, and tags. Replay with variable playback speeds to quickly review footage.



Non-Stop Recording

Stores up to 32 TB of footage from connected cameras to secure your data for quick and convenient access.

Network Topology

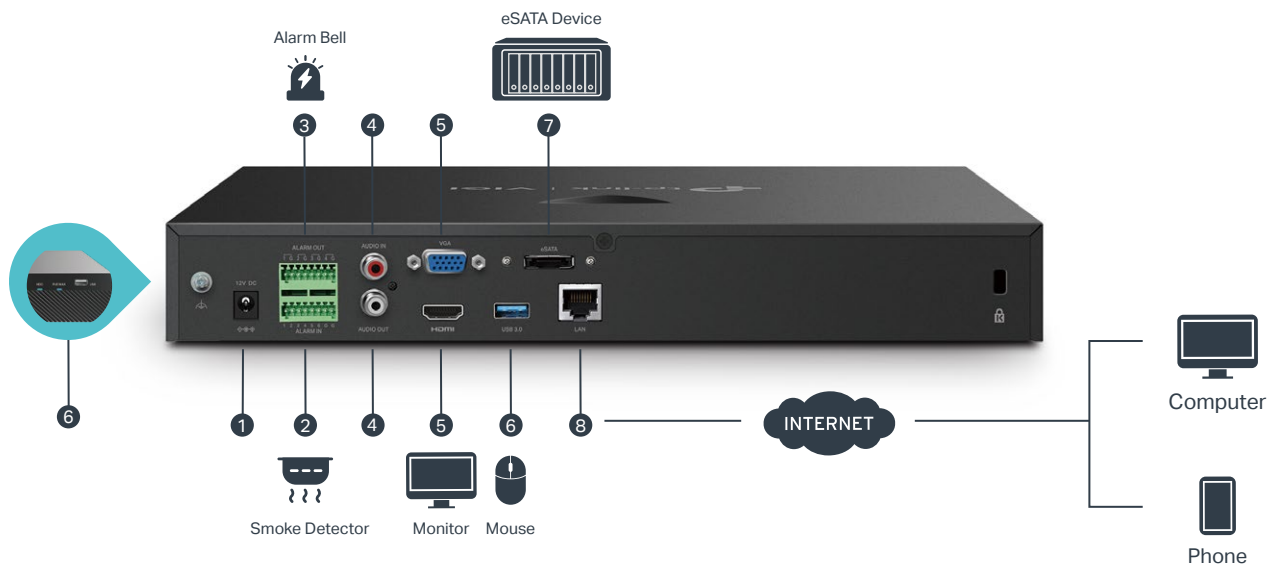

1. Power Supply
2. 6× Alarm IN Ports to Connect External Sensors
3. 4× Alarm OUT Ports to Connect Alarm Devices
4. AUDIO IN and AUDIO OUT for Two-Way Audio
5. HDMI and VGA for Video Independent Output
6. 1× USB 3.0 Port (Rear) and 1× USB 2.0 Port (Front) for Mouse and Keyboard Connections
7. 1× eSATA Port to Connect an External Storage Device**
8. 1× 10/100/1000 Mbps LAN Port for Ethernet Connection

*HDD is not included.

**Some features may operate sub-optimally due to compatibility issues. For best performance, we recommend using VIGI NVR with VIGI cameras.

^A hard disk drive (not included) must be installed for operation.

©2024 TP-Link

Specifications

NVR	
Product Model	VIGI NVR2016H
Video and Audio	
IP Video Input	16-Channel
Incoming Bandwidth	160 Mbps
Outgoing Bandwidth	160 Mbps
HDMI Output Resolution	1 Channel, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz
VGA Output Resolution	1 Channel, Resolution: 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz
Video Output Mode	HDMI/VGA Independent Output
Multi-View Display	1/4/6/8/9/16
Decoding	
Audio Compression	G.711A/G.711U/G.726
Video Compression	H.265+/H.265/ H.264+/H.264
Record Resolution	8MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	16-Channel [†]
Capability	• 25fps 10-ch@1080P • 30fps: 2-ch@8MP, 4-ch@5MP, 5-ch@4MP, 6-ch@3MP
Record Management	
Record Mode	Manual Recording, Scheduling Recording, Motion Detection Recording
Playback Mode	Instant Playback, Regular Playback, Tag Playback, Event Playback
Backup Mode	Regular Backup, Video Clip Backup
Playback Function	Play, Pause, Stop, Fast Forward, Fast Backward, Play By Frame, Full Screen, Video Clip, Export Clip, Digital Zoom, Lock Recording, Audio On/Off
Network	
Network Protocols	UPnP (Plug and Play), NTP (Network Timing), SMTP, DNS, TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, RTSP, SSL/TLS, RTP, IPv4, ARP
Interoperability	ONVIF Profile S, CGI
Mobile Phone Access	Android, iOS

Browser	Chrome (57+), Firefox (52+), Edge (91+), Safari (11+)
External Interface	
Network Interface	1, RJ-45 10/100/1000 Mbps Self-Adaptive Ethernet Interface
USB Interface	1 Front USB 2.0 Port, 1 Rear USB 3.0 Portt
Audio Interface	1-ch RCA Input; 1-ch RCA Output
Alarm In/Out	6/4
Serial Interface	N/A
Power	1× DC Jack
Reset Button	1
Speaker	N/A
eSATA	1*
HDMI	1
VGA	1
Hard Disk	
SATA	2 SATA Interfaces
Capacity	Up to 16 TB Capacity for Each HDD*
Alarm	
General Alarm	• Motion Detection • Video Tampering • Scene Change Detection • Line-Crossing Detection • Intrusion Detection • Region Entering Detection • Region Exiting Detection • Loitering Detection • Object Abandoned/Removal Detection • Vehicle Detection • Human Detection • Abnormal Sound Detection • Smart Frame Note: The alarm function requires the use of a camera.
Anomaly Alarm	• Video Loss • Offline and IP Conflict • Disk Exception • Login Exception • Fan Exception Note: The alarm function requires the use of a camera.
Alarm Linkage	• Recording • White Light Alarm • Buzzer • Log • Audible Alarm Note: The alarm function requires the use of a camera.

General	
Package Contents	• VIGI Network Video Recorder • Power Adapter • Power Cables • HDD Power Cables • HDD Data Cables • Mounting Accessories • Mouse • Quick Installation Guide
Power Supply	DC 12V/3.3A
Max Power Consumption (Without Disk)	7.47 W
Max Power Consumption (With Disk)	28.63W
Working Temperature	• NVR: -10–55 °C • Power Adapter: 0–40 °C
Storage Temperature	-40–70 °C
Working Humidity	10%~90% RH Non-Condensing
Storage Humidity	10%~90% RH Non-Condensing
Product Dimensions (W × D × H)	13.0 × 11.2 × 1.8 in (330 × 285 × 45 mm)
Net Weight	2.0 Kg [#]
Gross Weight	3.3 Kg [#]
Certification	CE, NTRA, Triman, BSMI, VCCI, FCC, HDMI, ONVIF

*A hard disk drive (not included) must be installed for operation.

†The number of simultaneously playable channels may be fewer than 16, or none, if the total resolution exceeds 20MP.

‡This model currently supports ONVIF Profile S.

[#]Due to the weight of this model, it is recommended to use a tray when mounting the rack with angle iron. Please note that the tray is not included.

Build Features



*HDD is not included.

Security Standards Compliance

All VIGI products are fully compliant with the following security and safety standards:

EN 55032:2015 + A11:2020

EN 55035:2017 + A11:2020

EN IEC 61000-3-2:2019 + A1:2021

EN 61000-3-3:2013 + A2:2021

EN IEC 61000-6-3:2021 + AC:2022-01

EN IEC 61000-6-1:2019

EN 50130-4:2011 + A1:2014

EN 62368-1:2014 + A11:2017

EN IEC 63000:2018

(EU) 2023/826