



Vonyx V205B Personal Monitor System Instruction Manual

[Home](#) » [VONYX](#) » Vonyx V205B Personal Monitor System Instruction Manual 

Vonyx V205B Personal Monitor System Instruction Manual



Congratulations to the purchase of this Vonyx product. Please read this manual thoroughly prior to using the product in order to benefit fully from all features.

Read the manual prior to using the product. Follow the instructions in order not to invalidate the warranty. Take all precautions to avoid fire and/or electrical shock. Repairs must only be carried out by a qualified technician in order to avoid electrical shock. Keep the manual for future reference.

- Prior to using the product, please ask advice from a specialist. When the product is switched on for the first time, some smell may occur. This is normal and will disappear after a while.
- The product contains voltage carrying parts. Therefore do **NOT** open the housing.
- Do not place metal objects or pour liquids into the product. This may cause electrical shock and malfunction.
- Do not place the product near heat sources such as radiators, etc. Do not place the product on a vibrating surface. Do not cover the ventilation holes.
- The product is not suitable for continuous use.

- Be careful with the mains lead and do not damage it. A faulty or damaged mains lead can cause electrical shock and malfunction.
- When unplugging the product from a mains outlet, always pull the plug, never the lead.
- Do not plug or unplug the product with wet hands.
- If the plug and/or the mains lead are damaged, they need to be replaced by a qualified technician.
- If the product is damaged to such an extent that internal parts are visible, do NOT plug the product into a mains outlet and DO NOT switch the unit on. Contact your dealer. Do NOT connect the product to a rheostat or dimmer.
- To avoid fire and shock hazard, do not expose the product to rain and moisture.
- All repairs should be carried out by a qualified technician only.
- Connect the product to an earthed mains outlet (220- 240Vac/50Hz) protected by a 10-16A fuse.
- During a thunderstorm or if the product will not be used for a longer period of time, unplug it from the mains. The rule is: Unplug it from the mains when not in use.
- If the product has not been used for a longer period of time, condensation may occur. Let the unit reach room temperature before you switch it on. Never use the product in humid rooms or outdoors.
- To prevent accidents in companies, you must follow the applicable guide lines and follow the instructions.
- Do not repeatedly switch the product on and off. This shortens the life time.
- Keep the product out of the reach of children. Do not leave the product unattended.
- Do not use cleaning sprays to clean switches. The residues of these sprays cause deposits of dust and grease. In case of malfunction, always seek advice from a specialist.
- Do not force the controls.
- If this product is with speaker inside which can cause magnetic field. Keep the product at least 60cm away from computer or TV.
- If this product have a built-in lead-acid rechargeable battery. Please recharge the battery every 3 months if you are not going to use the product for a long period of time. Otherwise the battery may be permanently damaged.
- If the battery is damaged please replace with same specifications battery. And dispose the damaged battery environment friendly.
- If the product has fallen, always have it checked by a qualified technician before you switch the product on again.
- Do not use chemicals to clean the unit. They damage the varnish. Only clean the product with a dry cloth.
- Keep away from electronic equipment that may cause interference.
- Only use original spares for repairs, otherwise serious damage and/or dangerous radiation may occur.
- Switch the product off prior to unplugging it from the mains and/or other equipment. Unplug all leads and cables prior to moving the product.
- Make sure that the mains lead cannot be damaged when people walk on it. Check the mains lead before every use for damages and faults!
- The mains voltage is 220-240Vac/50Hz. Check if power outlet match. If you travel, make sure that the mains voltage of the country is suitable for this product.
- Keep the original packing material so that you can transport the product in safe conditions.



This mark attracts the attention of the user to high voltages that are present inside the housing and that are of

sufficient magnitude to cause a shock hazard.



This mark attracts the attention of the user to important instructions that are contained in the manual and that he should read and adhere to.

The product has been certified CE. It is prohibited to make any changes to the product. They would invalidate the CE certificate and their guarantee!

NOTE: To make sure that the product will function normally, it must be used in rooms with a temperature between 5°C/41°F and 35°C/95°F.



Electric products must not be put into household waste. Please bring them to a recycling centre. Ask your local authorities or your dealer about the way to proceed. The specifications are typical. The actual values can slightly change from one unit to the other.

Specifications can be changed without prior notice.

Do not attempt to make any repairs yourself. This would invalid your warranty. Do not make any changes to the product. This would also invalid your warranty. The warranty is not applicable in case of accidents or damages caused by inappropriate use or disrespect of the warnings contained in this manual. Vonyx cannot be held responsible for personal injuries caused by a disrespect of the safety recommendations and warnings. This is also applicable to all damages in whatever form.

Contents

1 UNPACKING INSTRUCTION

2 OVERVIEW

3 CONNECTING WITH BT

4 TECHNICAL SPECIFICATION

5 Documents / Resources


5.1 References

UNPACKING INSTRUCTION

CAUTION! Carefully unpack the box upon receipt. Check the contents to ensure that all parts are present and have been received in good condition. Notify the shipper immediately and retain packaging material if any parts appear damaged from shipping or the package itself shows signs of mishandling. Save the package and all packaging materials. If the product must be returned, it is important that the product is returned in the original factory box and packaging.

If the device has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation water might damage your device. Leave the device switched off until it has reached room temperature.

OVERVIEW

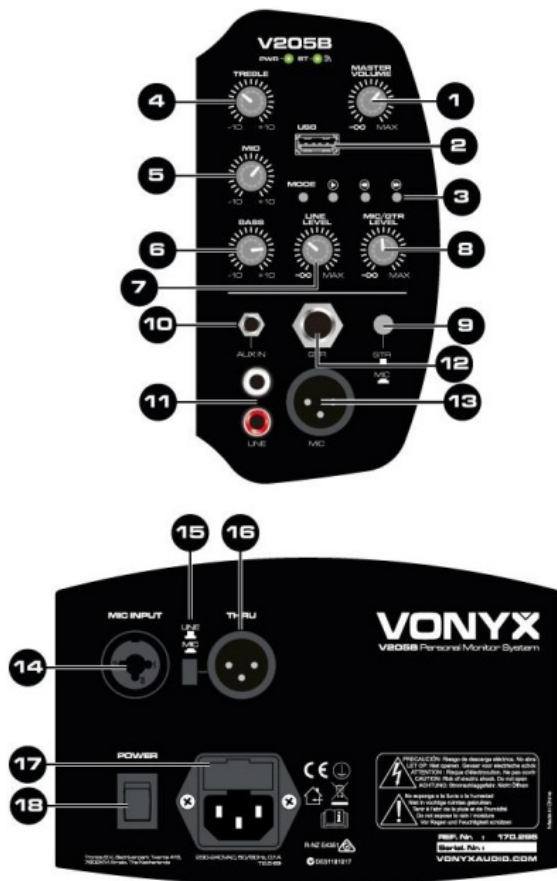

1. Master Volume

Adjust the overall output level of the portable sound system.

2. USB port

Connect your USB devices to this slot to play music with MP3 or WMA format.

3. Mediaplayer

Mode button: Press the button to select BT or USB function.

Play button: For switching between play and pause. Forward – Backward button: For next or previous title selection (short press) and forward or reverse (long press).

4. Treble

Adjust tone control for treble frequency.

5. Mid

Adjust tone control for mid frequency.

6. Bass

Adjust tone control for bass frequency.

7. Line Level

Adjust the signal level of the line input.

8. Microphone / Guitar Level

Adjust the signal level of the microphone / guitar input.

9. Microphone / Guitar Input selector

Press this button to select XLR microphone input (13) or for unbalanced signals from instruments using 6.3mm (1/4") Jack connector (12).

10. Aux Input

Jack 3.5mm connector for devices like a mobile phone.

11. Line input

RCA connector for devices like CD player, Tuner etc.

12. **Guitar input**

6.3mm (1/4") jack input for unbalanced signals from instruments

13. **Microphone Input**

XLR input jack for connecting a microphone.

14. **Microphone Combi-Input**

XLR and 6.3mm jack input for connecting a microphone.

15. **Microphone/Line Switch**

The MIC/LINE switch affects the output level of the THRU connector. Leave the switch out (LINE) when connecting the THRU connector to a line-level input on a mixer. Push the switch in (MIC) when connecting the THRU connector to a microphone input on a mixer.

16. **THRU**

Route a signal to another speaker or device by using a balanced XLR output connector. The THRU jack draws a signal from just before the Master Volume and EQ section, combined with the input signal (14).

17. **Power Input**

Plug the included IEC power cable into this jack.

18. **Power Switch**

Turns the speaker on and off.

CONNECTING WITH BT

1. Activate the BT-function on your device (Mobile phone, tablet etc.) from which you want to play the music. See the operating instructions for that device.
2. Press the "MODE" button and activate BT-function. The BT LED will be flashing.
3. Select "V205B" on your BT-device and make the BT-connection. The BT LED will be illuminated.

Attention: The BT distance is approx. 10 meter without any barrier.



TECHNICAL SPECIFICATION

Playback options: BT streaming, USB, Microphone (input)

Input connections: 3.5mm Jack, 6.3mm Jack, RCA, USB, XLR (3-pin)

Speaker type: Active (amplified)

Output power: Max : 80W

Frequency response: 40Hz – 18.000Hz

Diameter woofer: 5"

Impedance: 4 Ohm

SPL @ 1W/1m: 100dB

Power supply: 220-240VAC 50Hz

Dimensions (L x W x H): 200 x 280 x 210

Weight: 3,25kg

The specifications are typical. The actual values can slightly change from one unit to the other. Specifications can be changed without prior notice.

The products referred to in this manual conform to the European Community Directives to which they are subject:

European Union

Tronios B.V.,
Bedrijvenpark Twente Noord 18,
7602KR Almelo, The Netherlands



2014/35/EU
2014/30/EU
2011/65/EC
2014/53/EU

United Kingdom

Tronios Ltd.,
130 Harley Street,
London W1G 7JU, United Kingdom



S.I. 2016:1101
S.I. 2016:1091
S.I. 2012:3032
S.I. 2017:1206

Specifications and design are subject to change without prior notice.

www.tronios.com

Copyright © 2023 by Tronios The Netherlands



VONYX

V205B Personal Monitor System






170.295

INSTRUCTION MANUAL
GEBRUCHSANLEITUNG
MANUAL DE INSTRUCCIONES
MANUEL D'INSTRUCTIONS
ISTRUKCIA OBSŁUGI

1012

[Vonyx V205B Personal Monitor System](#) [pdf] Instruction Manual
V205B, V205B Personal Monitor System, Personal Monitor System, Monitor System, 170.295

References

-  [Samen zijn we open. Samen staan we sterk. - Stichting Open](#)
-  [Samen zijn we open. Samen staan we sterk. - Stichting Open](#)
-  [Sound & Light distributor - Tronios.com](#)
-  [Home - Wecycle](#)
-  [Home - Wecycle](#)
- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.