

**WEBANG  
WWS15  
Garbage  
Disposal  
Wireless  
Switch Kit**



## WANBANG WWS15 Garbage Disposal Wireless Switch Kit Instruction Manual

[Home](#) » [WANBANG](#) » WANBANG WWS15 Garbage Disposal Wireless Switch Kit Instruction Manual 

### Contents

- [1 WANBANG WWS15 Garbage Disposal Wireless Switch Kit](#)
- [2 Specifications](#)
- [3 FAQs](#)
- [4 PRECAUTION](#)
- [5 INCLUDES](#)
- [6 PRODUCT SIZE](#)
- [7 INSTALLATION](#)
- [8 FCC](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)

**WEBANG**

**WANBANG WWS15 Garbage Disposal Wireless Switch Kit**



## Specifications

- **Model:** [Insert Model Number]
- **Compliance:** FCC Radiation exposure limits
- **Minimum Distance:** 20cm between radiator and body

## FAQs

- **Q: What are the FCC Radiation exposure limits?**
  - **A:** The FCC sets limits on the amount of radiation emitted by electronic devices to ensure they are safe for use in an uncontrolled environment.
- **Q: Why is a minimum distance of 20cm required between the radiator and the body?**
  - **A:** Maintaining a minimum distance helps reduce potential radiation exposure to the body, ensuring safe usage of the equipment.

## PRECAUTION

### WARNINGS


- TO AVOID FIRE, SHOCK, OR DEATH, TURN OFF THE POWER AT THE CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING!
- TO AVOID THE RISK OF ELECTRIC SHOCK, ALL NON-GFCI RECEPTACLES MUST BE GFCI-PROTECTED.
- IF THE WATER ENTERS THE ASSEMBLY, TURN THE POWER OFF AT THE CIRCUIT BREAKER and replace the unit immediately.

### CAUTIONS


- Install and/or use by appropriate electrical codes and regulations.

- Use only the electrical mounting box provided.
- Use indoors only. Not for use in wet locations, such as kitchen or bathroom countertops.
- For surfaces greater than 2 1/4" thick. (5.72 cm), use the overmount installation.
- If you are unsure about any part of these instructions, consult an electrician.
- Use this device with copper or copper-clad wire only.


## INCLUDES

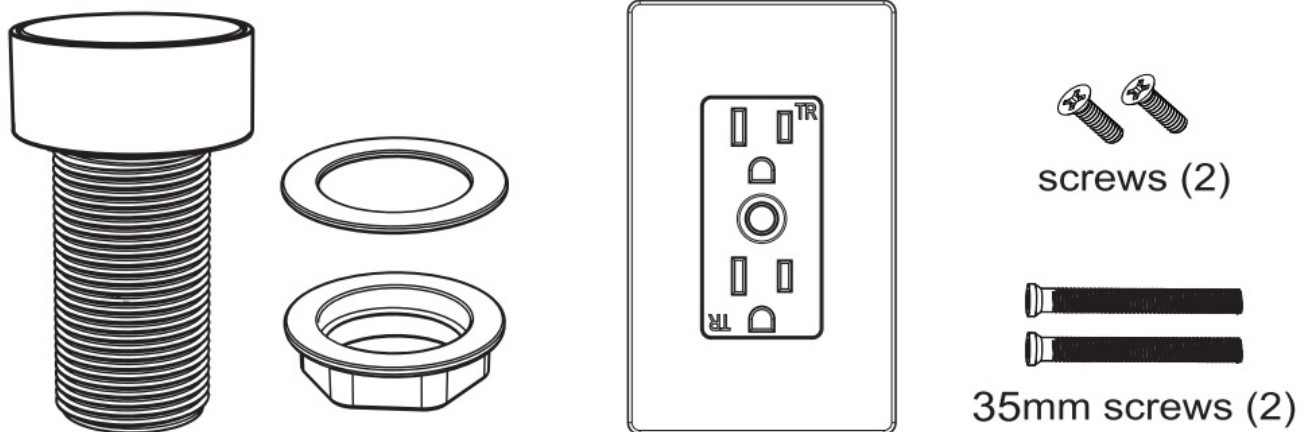

Also includes one of the following assembly lids

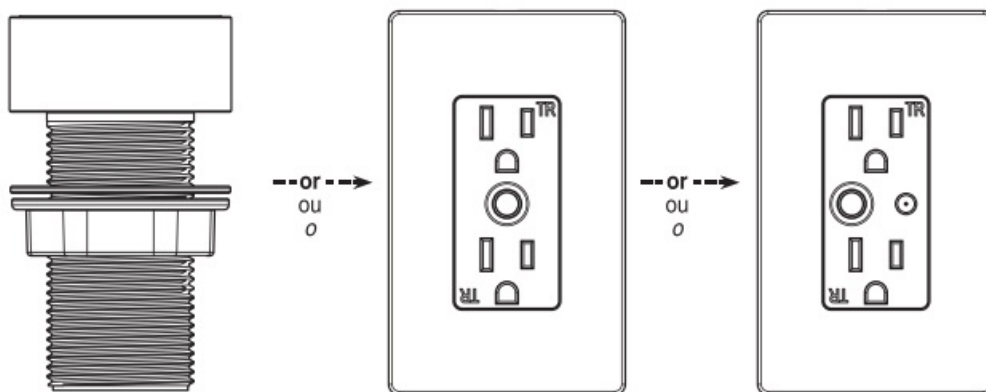


## PRODUCT SIZE

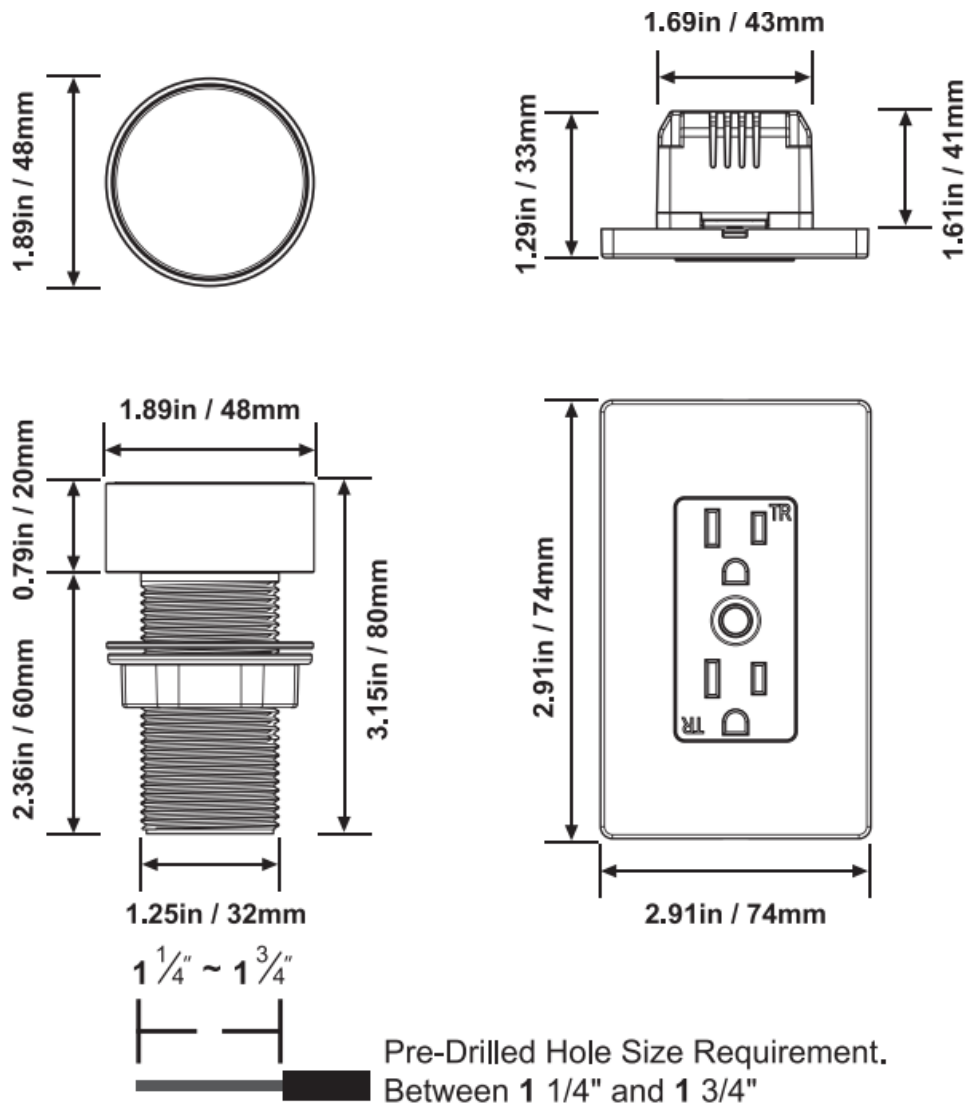

## INSTALLATION

- WARNING:** TO AVOID FIRE, SHOCK, OR DEATH; TURN OFF THE POWER AT THE CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING!
- This device is to be installed in a wall box measuring at least 3" x 2" x 2-1/2" (standard single gang electrical wall box) and wired per NEC article 314 box fill requirements.
- Connect wires per WIRING DIAGRAM as follows:
  - NOTE:** Back and Side wire terminals accept #14-#12 AWG copper or copper clad wires.
- 4a.** To Side Wire (if more than one wire is required on a terminal, you cannot side wire and must use the bank wire option):
  - Remove the insulation from each circuit conductor per strip gauge on the device [approx. 3/4" (1.9 cm)]. Loop wires clockwise 3/4 turn around terminal screws. **FIRMLY** tighten the screws over the wire loop.
  - 4b.** To Back Wire: Remove the insulation from each circuit conductor [approx. 1/2" (1.3 cm)]. Insert straight wires under clamps next to appropriate terminal screws. Tighten screws **FIRMLY**.
- Mount the device in the wall box with the screws provided and mount the wall plate.
- Restore power at the circuit breaker or fuse. Installation is complete.

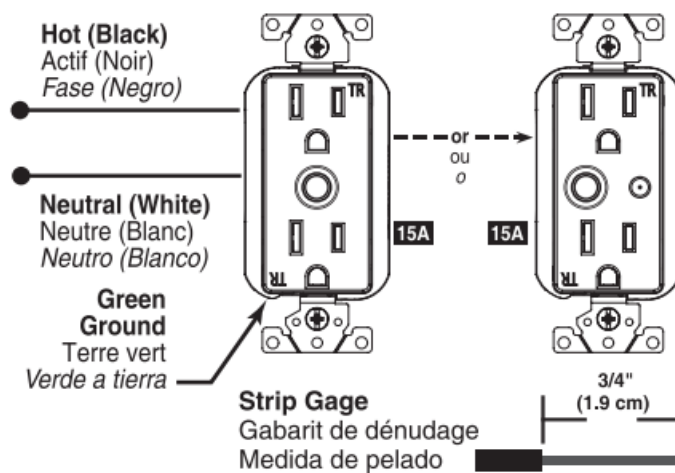

## Garbage Disposal Wireless Switch Kit

- Cat.No. WWS15.WWS15-DC (15A-125VAC/CA)
- Cat.No. WWS20,WWS20-DC(20A-125VAC/CA)
- DC Rated: 9V/1.5A

## FCC

### FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, according to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used by the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


To assure continued compliance, any changes or modifications not expressly approved by the party. Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices). This equipment complies with Part 15 of the FCC Rules.

**Operation is subject to the following two conditions:**

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

**FCC Radiation Exposure Statement:** The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environments. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

**Documents / Resources**

	<p><a href="#">WANBANG WWS15 Garbage Disposal Wireless Switch Kit</a> [pdf] Instruction Manual WWS15, WWS15 Garbage Disposal Wireless Switch Kit, Garbage Disposal Wireless Switch Kit, Disposal Wireless Switch Kit, Wireless Switch Kit, Switch Kit, Kit</p>
---	--

**References**

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.