

Product Name: Smart Phone	Report No: ITEZA2-202400458RF2
Product Model: Note 58, Note58 Pro, Note58 Pro+, Note 59, Note59 Pro, Note59 Pro+, Note58 Plus	Security Classification: Open
Version: V1.0	Total Page: 85

TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Aaron Long	Stone Tang	Joky Wang	
<i>Aaron Long</i>	<i>Stone Tang</i>	<i>Joky Wang</i>	

RF TEST REPORT

FCC ID: 2AX4YNOTE58

According to

47 CFR FCC Part 15, Subpart C(Section 15.247)

ANSI C63.10:2013

Applicant:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Manufacturer:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Sample No:	1000052955
Product Name:	Smart Phone
Brand Name:	DOOGEE
Model No.:	Note 58, Note58 Pro, Note58 Pro+, Note 59, Note59 Pro, Note59 Pro+, Note58 Plus
Test No.:	Note 58

Date of Receipt:	2024/11/21
Date of Test:	2024/11/21~2024/12/30
Issued Date:	2025/01/02
Testing Lab:	TIRT

Note: This report shall not be reproduced except in full, without the written approval of Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.

This document may be altered or revised by Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.Personnel only, and shall be noted in the revision section of the document. The test results of this report relate only to the tested sample identified in this report.

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	5
1.1. Description of Standards and Results	5
2. General Information	6
2.1. Description of Device (EUT)	6
2.2. Accessories of Device (EUT)	7
2.3. Tested Supporting System Details	7
2.4. Block Diagram of connection between EUT and simulators	7
2.5. Test Mode Description	7
2.6. Test Conditions	8
2.7. Test Facility	8
2.8. Measurement Uncertainty	8
2.9. Test Equipment List	9
3. Maximum Peak Output power	10
3.1. Limit	10
3.2. Test Procedure	10
3.3. Test Setup	10
3.4. Test Result	10
4. Bandwidth	16
4.1. Limit	16
4.2. Test Procedure	16
4.3. Test Result	16
5. Carrier Frequency Separation	23
5.1. Limit	28
5.2. Test Procedure	28
5.3. Test Result	28
6. Number Of Hopping Channel	31
6.1. Limit	31
6.2. Test Procedure	31
6.3. Test Result	31
7. Dwell Time	34
7.1. Test limit	34
7.2. Test Procedure	34
7.3. Test Result	34
8. Radiated emissions	40
8.1. Limit	40
8.2. Block Diagram of Test setup	41
8.3. Test Procedure	42
8.4. Test Result	42
9. Band Edge Compliance	46
9.1. Block Diagram of Test Setup	46
9.2. Limit	46
9.3. Test Procedure	46
9.4. Test Result	46
10. Power Line Conducted Emissions	69
10.1. Block Diagram of Test Setup	69
10.2. Limit	69
10.3. Test Procedure	69
10.4. Test Result	70
11. Antenna Requirements	72
11.1. Limit	72
11.2. Result	72
12. Test setup photo	73
12.1. Photo of Radiated Emission test	73
12.2. Photo of Conducted Emission test	74

History of this test report

Original Report Issue Date: 2025.01.02

- No additional attachment
- Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT Name : Smart Phone
Model No. : Note 58, Note58 Pro, Note58 Pro+, Note 59, Note59 Pro, Note59 Pro+, Note58 Plus
DIFF. : There is no difference except the name of the model. All tests are made with the Note 58 model.
Power supply : DC 3.91V from battery or DC 5V AC Power Adapter

Radio Technology : Bluetooth V5.0 EDR

Operation frequency : 2402-2480MHz

Channel No. : 79 Channels

Channel spacing : 1MHz

Modulation type : GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna Type : PIFA antenna, Maximum Gain is 0.68dBi.
Antenna information is provided by applicant.

Software version : DOOGEE-N58-EEA-Android14.0-20241106

Hardware version : SC6023U_MB_V1.0.0

Intend use : Residential, commercial and light industrial environment
environment

2.2. Accessories of Device (EUT)

Accessories: AC Power Adapter

Manufacturer: Shenzhen Huajin Electronics Co.,Ltd

Model: HJ-0502000-US


Ratings: Input: 100-240V~ 50/60Hz 0.3A

Output: 5.0V=2.0A 10.0W

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	--	--	--	--	--

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
$\pi/4$ DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
8DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab.Designation Number:	CN1366
FCC Test Firm Registration Number:	820690
Telephone:	+86-0755-27087573

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±142.12 KHz
RF power conducted	±0.74 dB
RF power radiated	±3.25dB
Spurious emissions, conducted	±1.78dB
Spurious emissions, radiated (9KHz~30MHz)	±2.56dB
Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
Spurious emissions, radiated (Above 1GHz)	±4.9dB
Conduction Emissions(150kHz~30MHz)	±3.1 dB
Humidity	±4.6%
Temperature	±0.7℃
Time	±1.25

2.9. Test Equipment List

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Receiver	Rohde&Schwarz	ESIB 40	YH-TIRT-SAC-966-20220911	2024/01/05	2025/01/04
Integral Antenna	Schwarzbeck	VULB 9163	01314	2023/12.11	2025/12/10
Integral Antenna	Rohde&Schwarz	HF907	RSM2991424	2023/12/11	2025/12/10
Preamplifier	Emtrace	RP01A	'02017	2024/01/05	2025/01/04
Preamplifier	Schwarzbeck	BBV9744	00143	2024/01/05	2025/01/04
Loop Antenna	ZHINAN	ZN30900A	12024	2024/01/05	2025/01/04
Horn Antenna	Schwarzbeck	BBHA9170	00956	2024/01/05	2025/01/04
RF Cable	/	LMR400UF-NMNM-7.0M	/	2024/01/05	2025/01/04
RF Cable	/	SFT2050PUR-NMNM-7.0M	/	2024/01/05	2025/01/04
EMI Receiver	Rohde&Schwarz	ESR7	1316.3003K07-102611-mk	2024/11/02	2025/11/01
LISN	Rohde&Schwarz	ENV216	3560.655.12-102915-Bp	2024/11/02	2025/11/01
RF Cable	\	SFT2050PUR-NMNM-2.0M	\	2024/01/05	2025/01/04
Spectrum analyzer	ROHDE&SCHWARZ	FSU26	200732	2024/01/05	2025/01/04
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	101722	2024/01/05	2025/01/04
Filter	HEWLETT PACKARD	JS0806-F	19K8060209	2024/01/05	2025/01/04

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

Please refer section15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

3.2. Test Procedure


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	$\geq 3 \times \text{RBW}$
RBW	3 MHz
VBW	10MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.3. Test Result


Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	6.94	≤ 30	PASS
		2441	10.12	≤ 30	PASS
		2480	11.68	≤ 30	PASS
2DH5	Ant1	2402	5.92	≤ 20.97	PASS
		2441	10.17	≤ 20.97	PASS
		2480	11.64	≤ 20.97	PASS
3DH5	Ant1	2402	5.83	≤ 20.97	PASS
		2441	9.84	≤ 20.97	PASS
		2480	11.41	≤ 20.97	PASS

DH5_Ant1_2402

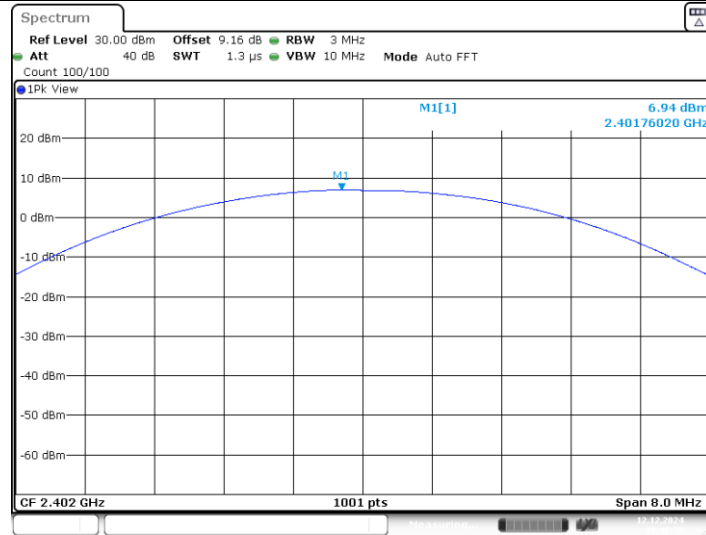


Date: 12.DEC.2024 10:48:50


DH5_Ant1_2441

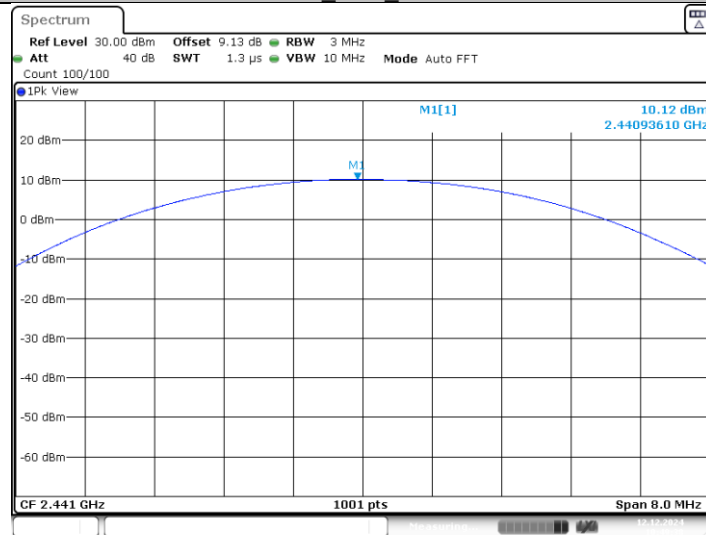

Date: 12.DEC.2024 10:49:38

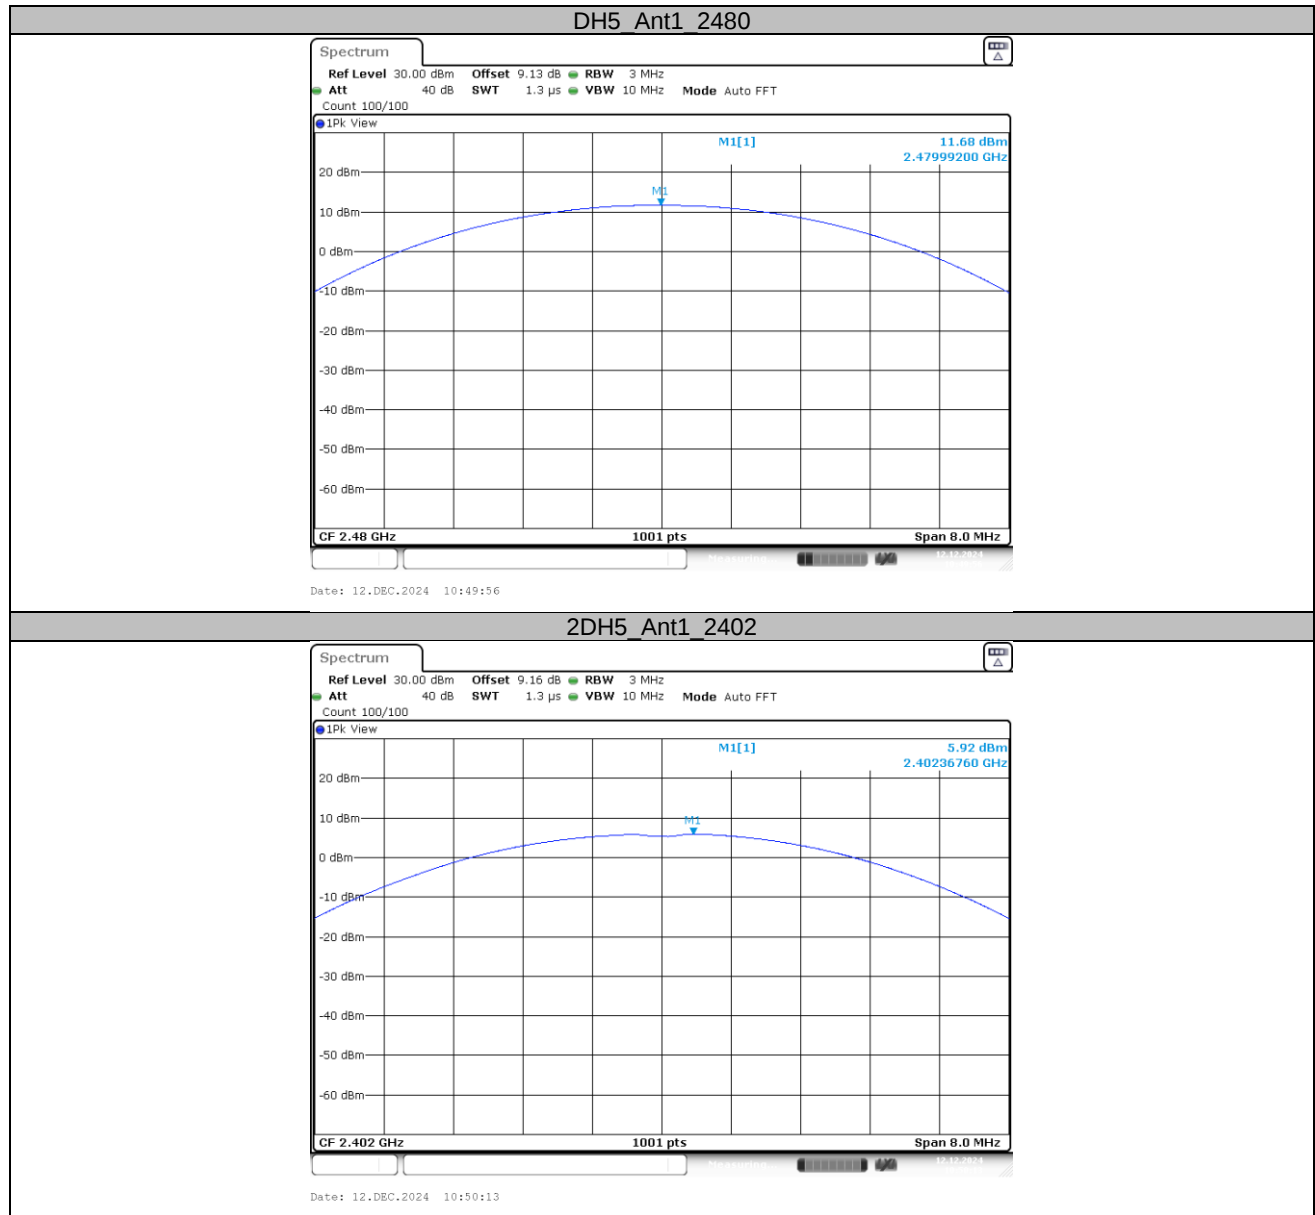


2DH5_Ant1_2441

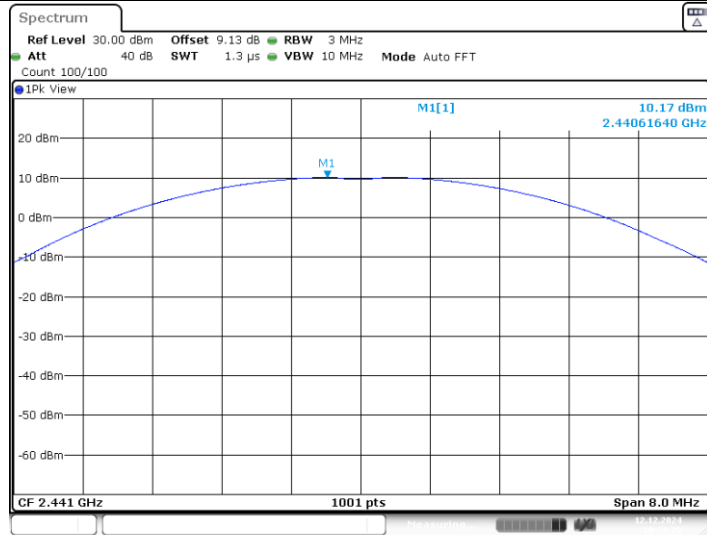


Date: 12.DEC.2024 10:50:28

2DH5_Ant1_2480

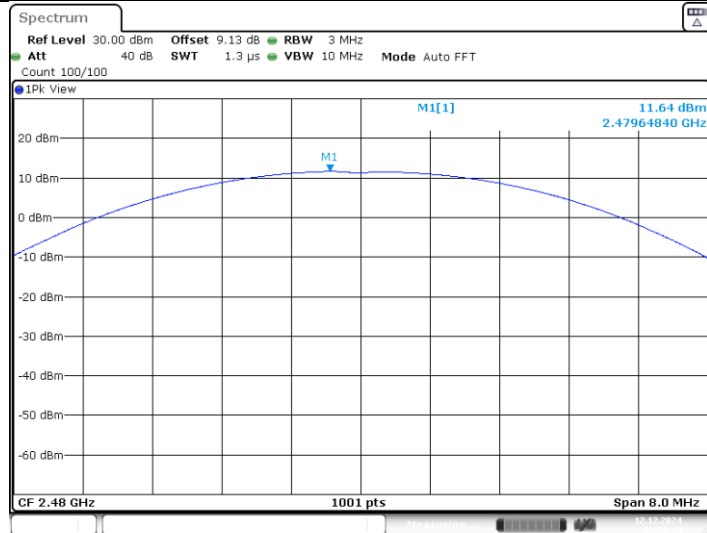


Date: 12.DEC.2024 10:50:40

3DH5_Ant1_2402

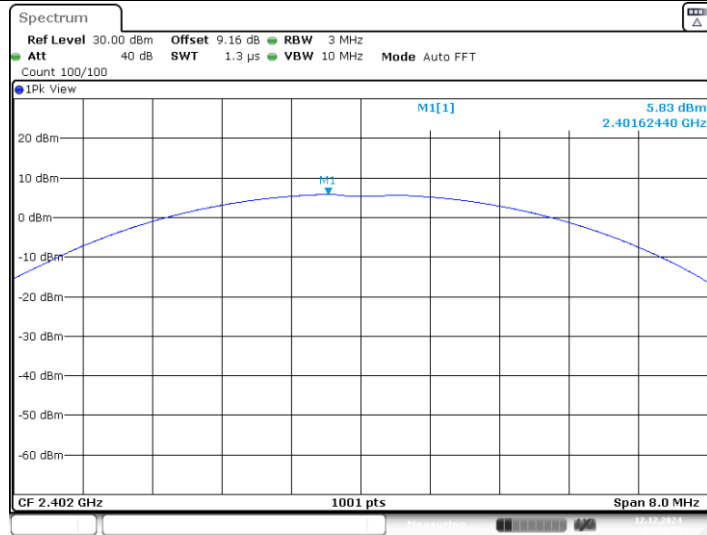


Date: 12.DEC.2024 10:51:00

3DH5_Ant1_2441

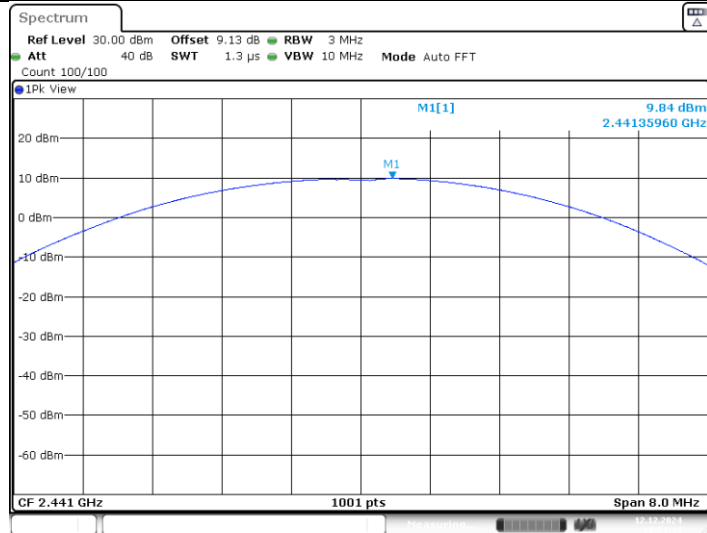

Date: 12.DEC.2024 10:51:14

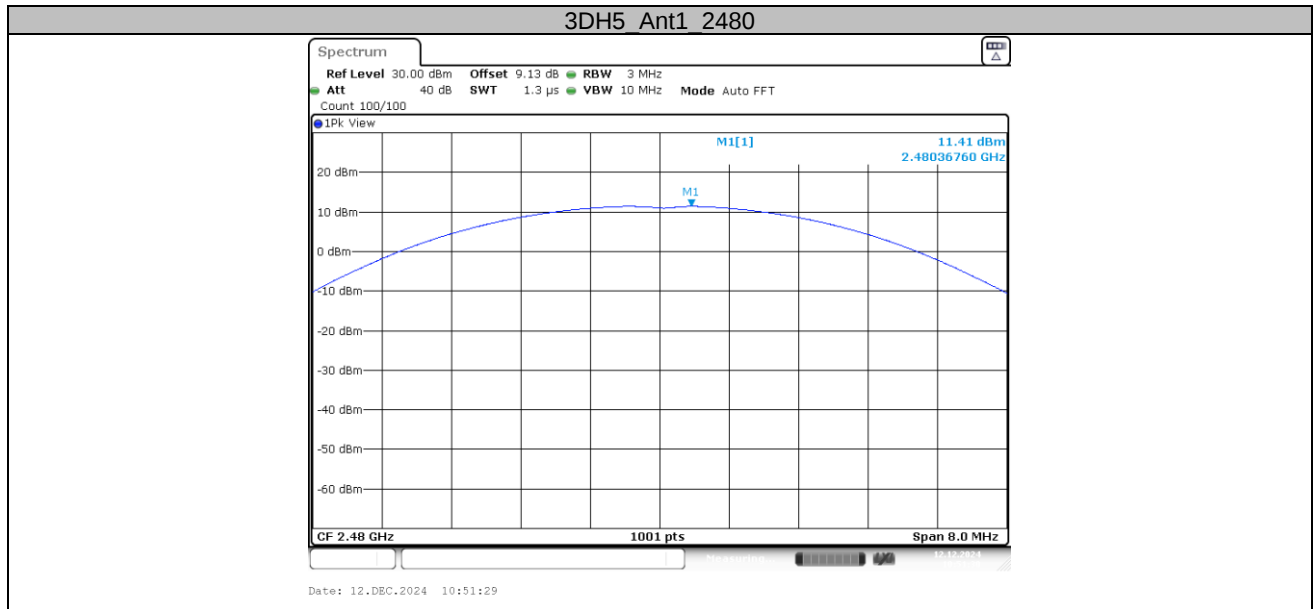

4. BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


-20dB Bandwidth

TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.86	2401.54	2402.40	---	---
		2441	0.86	2440.54	2441.40	---	---
		2480	0.86	2479.54	2480.40	---	---
2DH5	Ant1	2402	1.27	2401.36	2402.63	---	---
		2441	1.27	2440.36	2441.63	---	---
		2480	1.27	2479.36	2480.63	---	---
3DH5	Ant1	2402	1.29	2401.34	2402.63	---	---
		2441	1.26	2440.35	2441.61	---	---
		2480	1.27	2479.35	2480.62	---	---


DH5_Ant1_2402

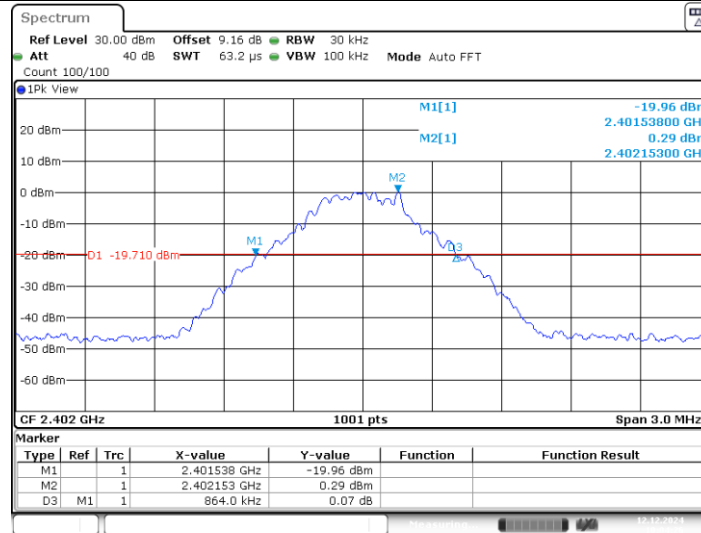

DH5_Ant1_2441

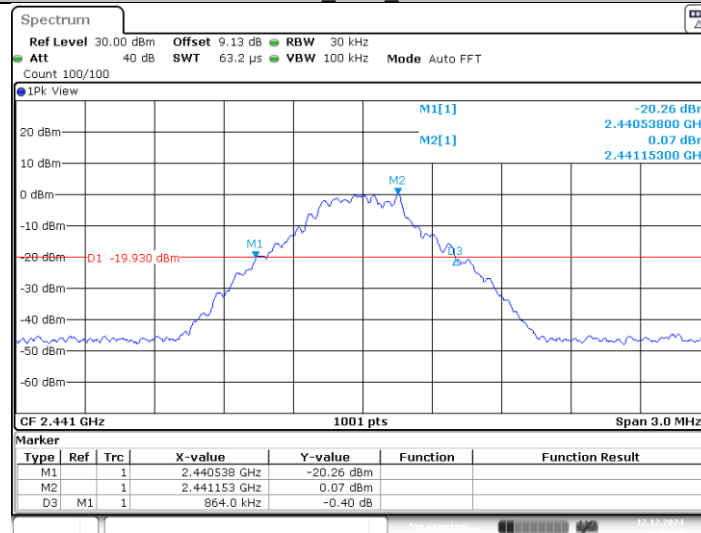


DH5_Ant1_2480

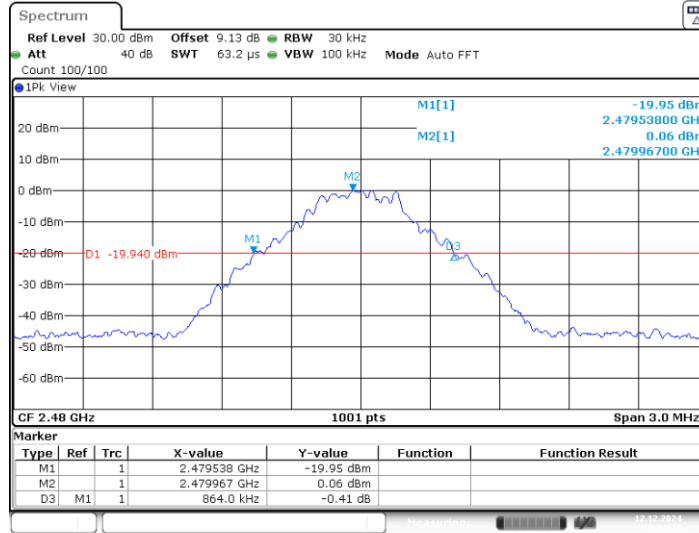


Date: 12.DEC.2024 10:08:16


2DH5_Ant1_2402

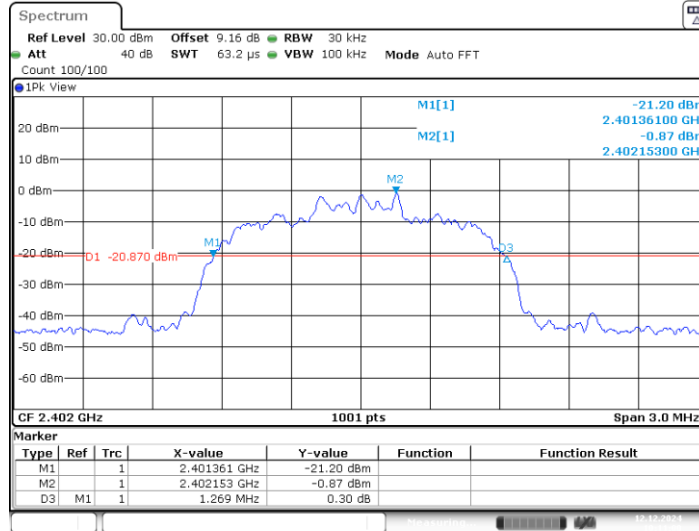

Date: 12.DEC.2024 10:11:00

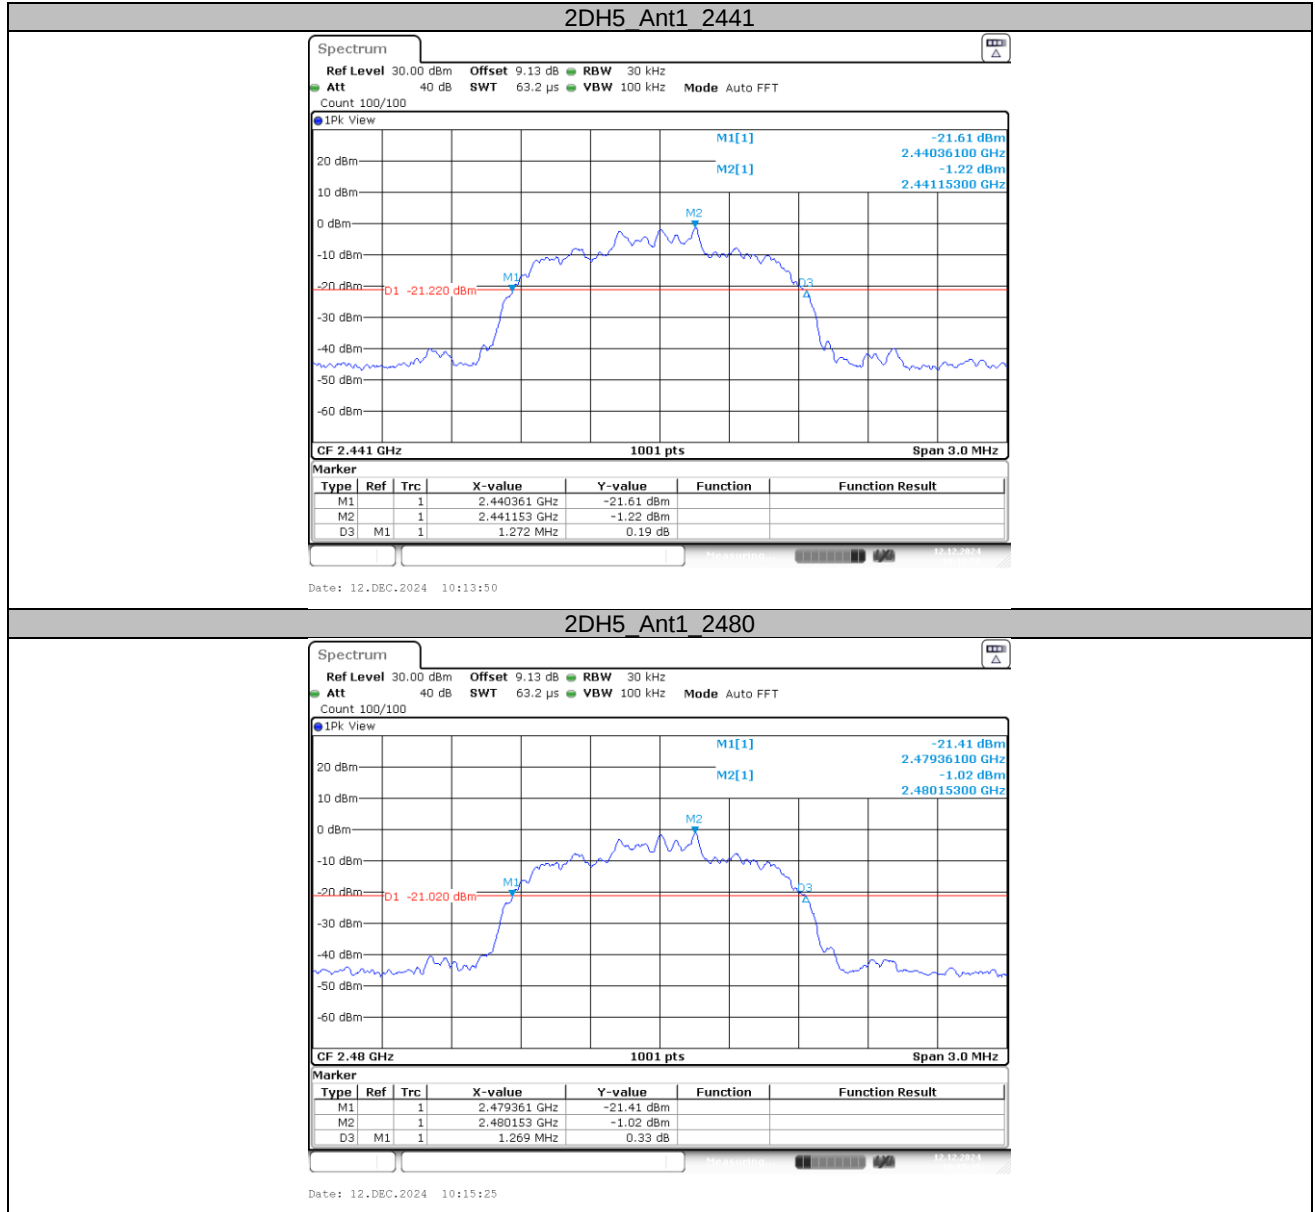


3DH5_Ant1_2402

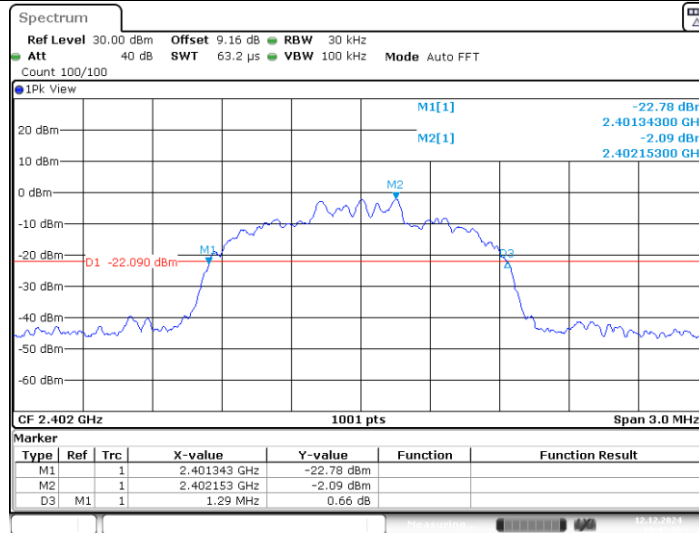


Date: 12.DEC.2024 10:43:06

3DH5_Ant1_2441

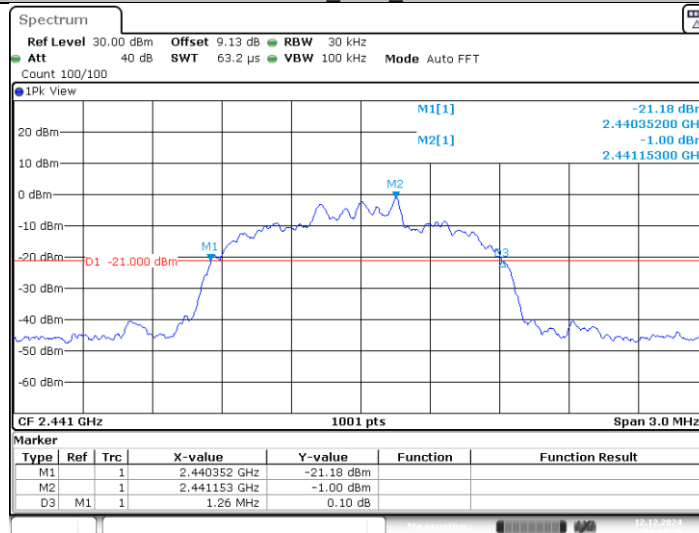



Date: 12.DEC.2024 10:43:30

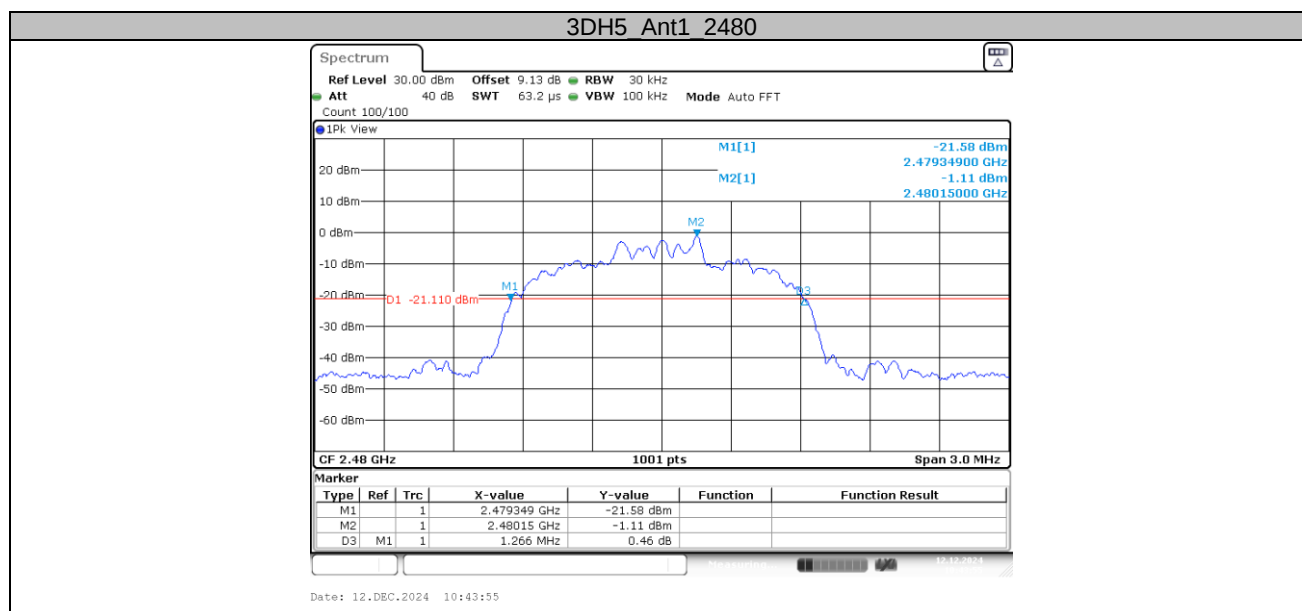


99% Occupied Bandwidth

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.758	2401.6134	2402.3716	---	---
		2441	0.761	2440.6134	2441.3746	---	---
		2480	0.755	2479.6164	2480.3716	---	---
2DH5	Ant1	2402	1.154	2401.4096	2402.5634	---	---
		2441	1.145	2440.4156	2441.5604	---	---
		2480	1.148	2479.4126	2480.5604	---	---
3DH5	Ant1	2402	1.151	2401.4156	2402.5664	---	---
		2441	1.151	2440.4156	2441.5664	---	---
		2480	1.151	2479.4156	2480.5664	---	---

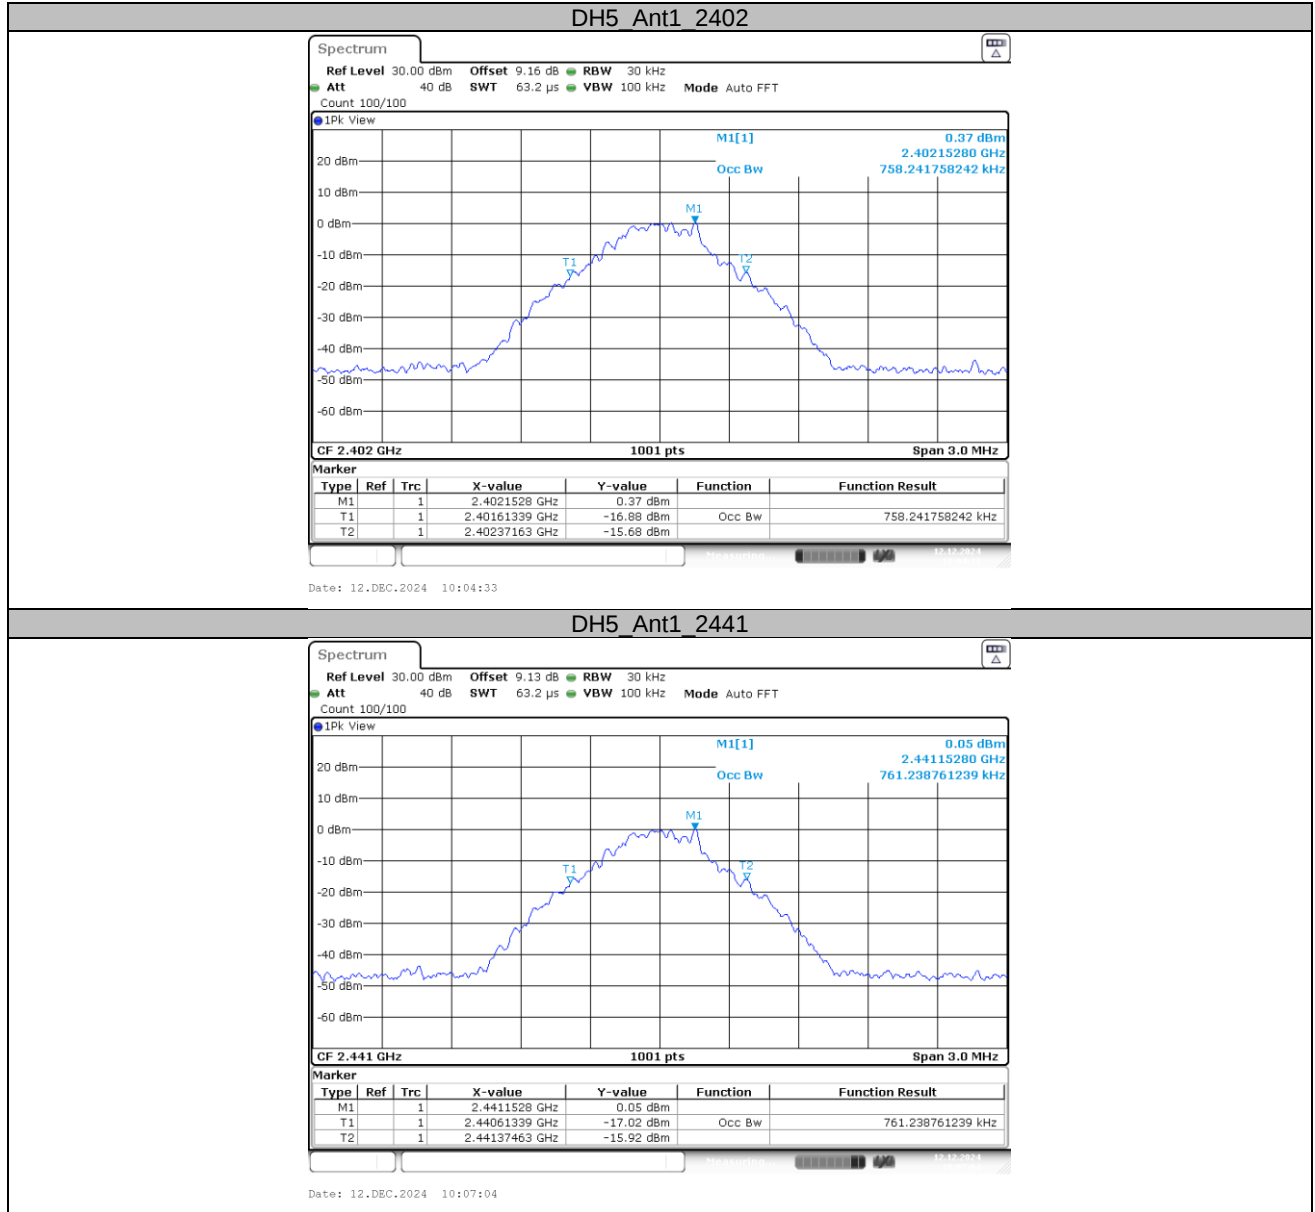

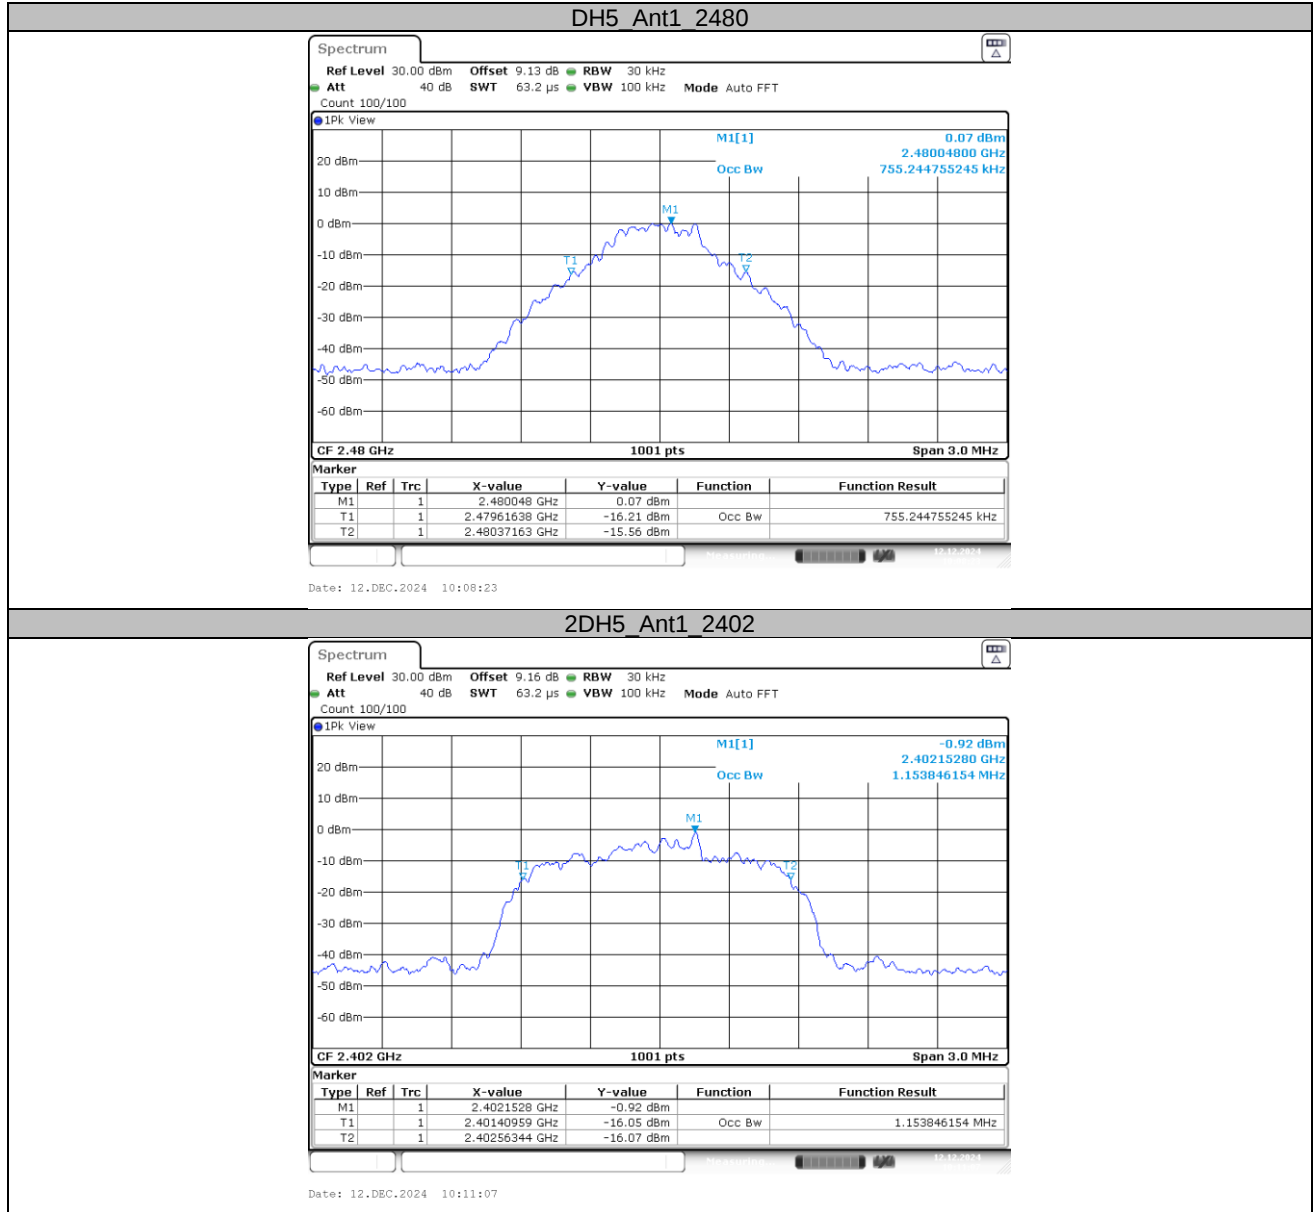


2DH5_Ant1_2441

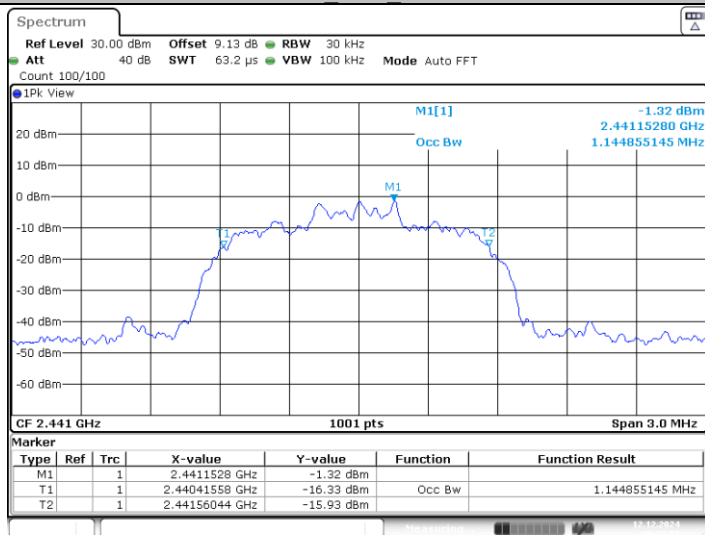


Date: 12.DEC.2024 10:13:57

2DH5_Ant1_2480

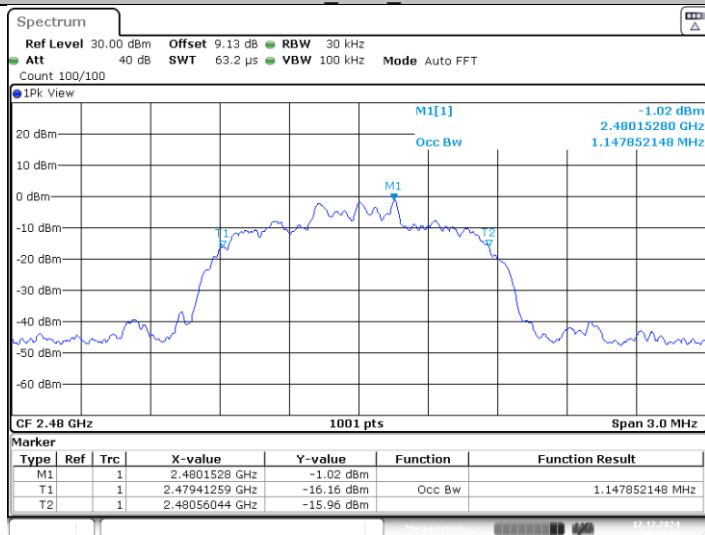


Date: 12.DEC.2024 10:15:32

3DH5_Ant1_2402

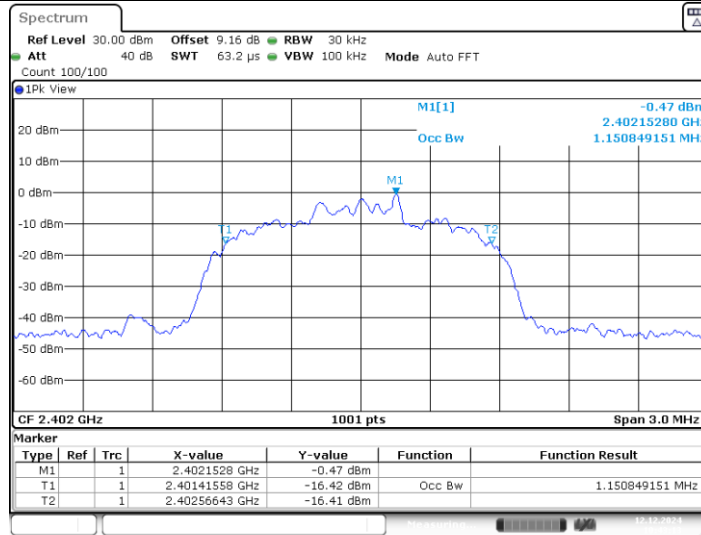


Date: 12.DEC.2024 10:43:13

3DH5_Ant1_2441

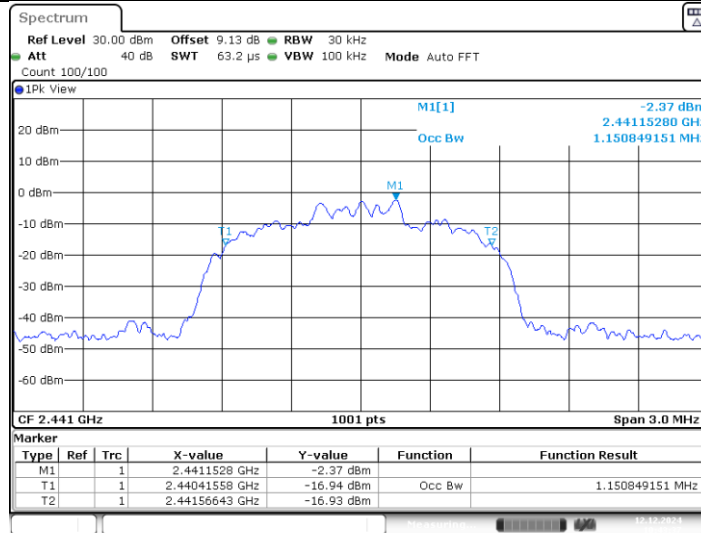

Date: 12.DEC.2024 10:43:37

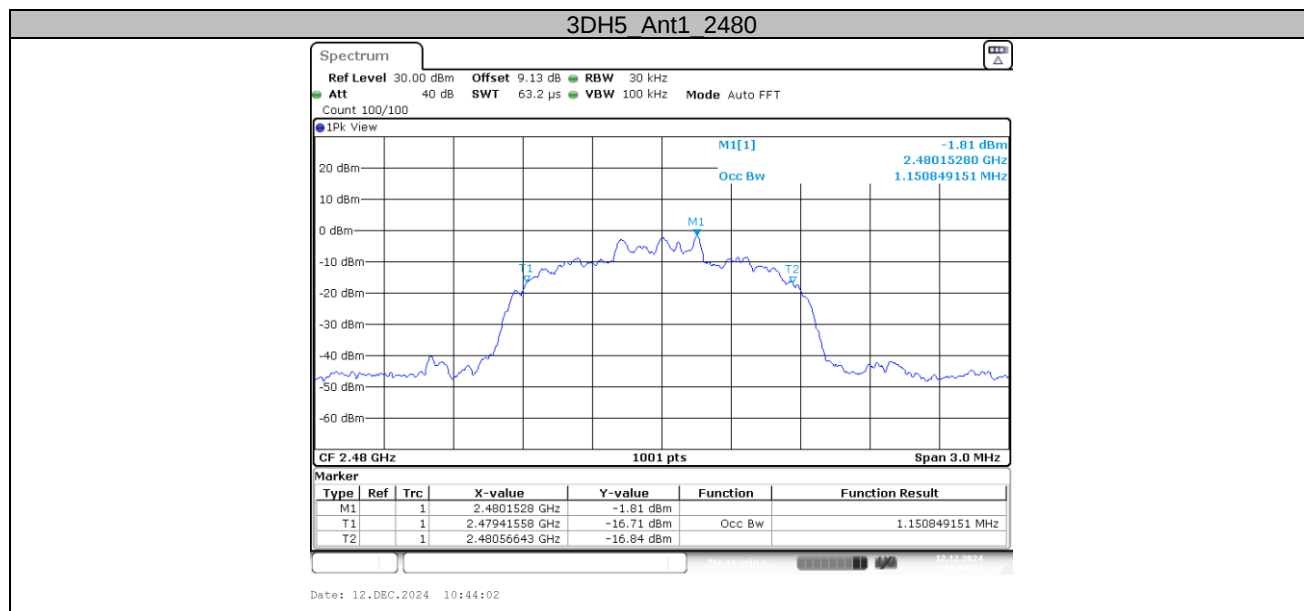

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result


TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.991	≥ 0.860	PASS
2DH5	Ant1	Hop	1.162	≥ 0.847	PASS
3DH5	Ant1	Hop	0.861	≥ 0.860	PASS

DH5 Ant1 Hop

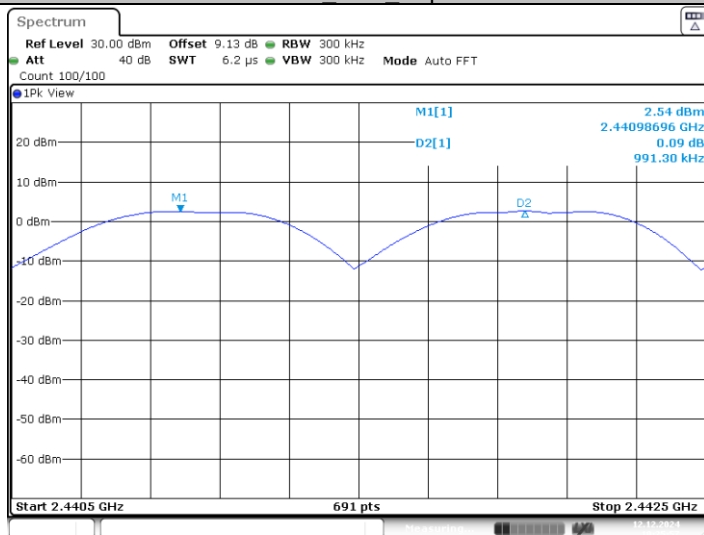


Date: 12.DEC.2024 10:25:57

2DH5 Ant1 Hop

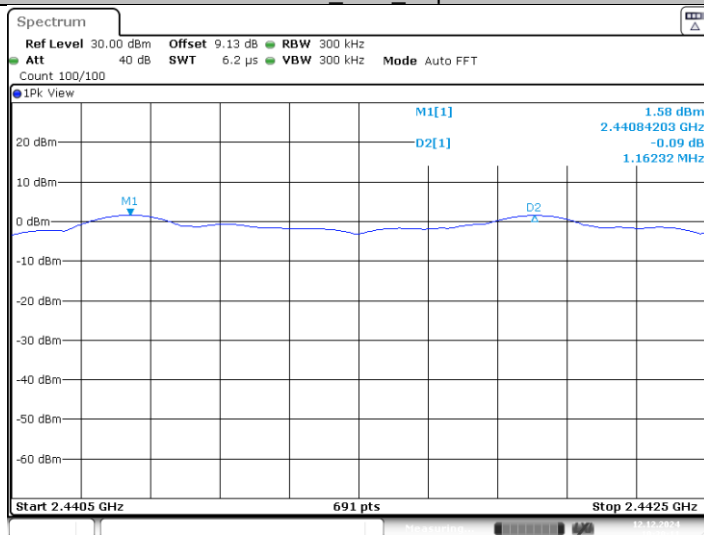

Date: 12.DEC.2024 10:30:11

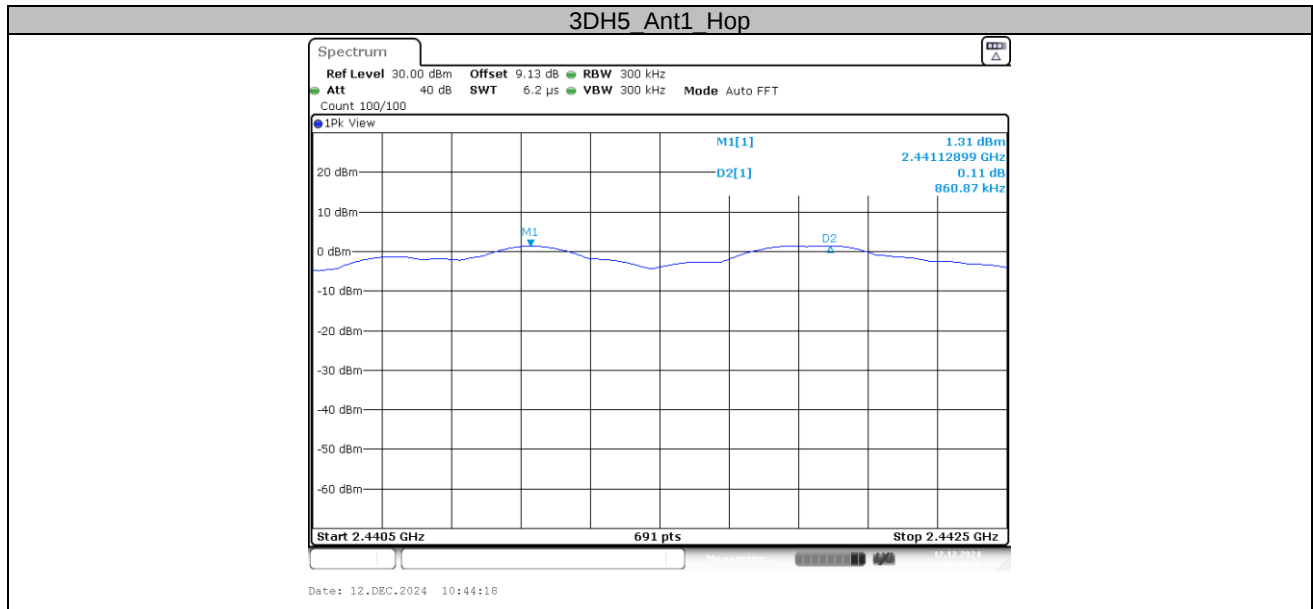

6. NUMBER OF HOPPING CHANNEL

6.1. Limit


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS

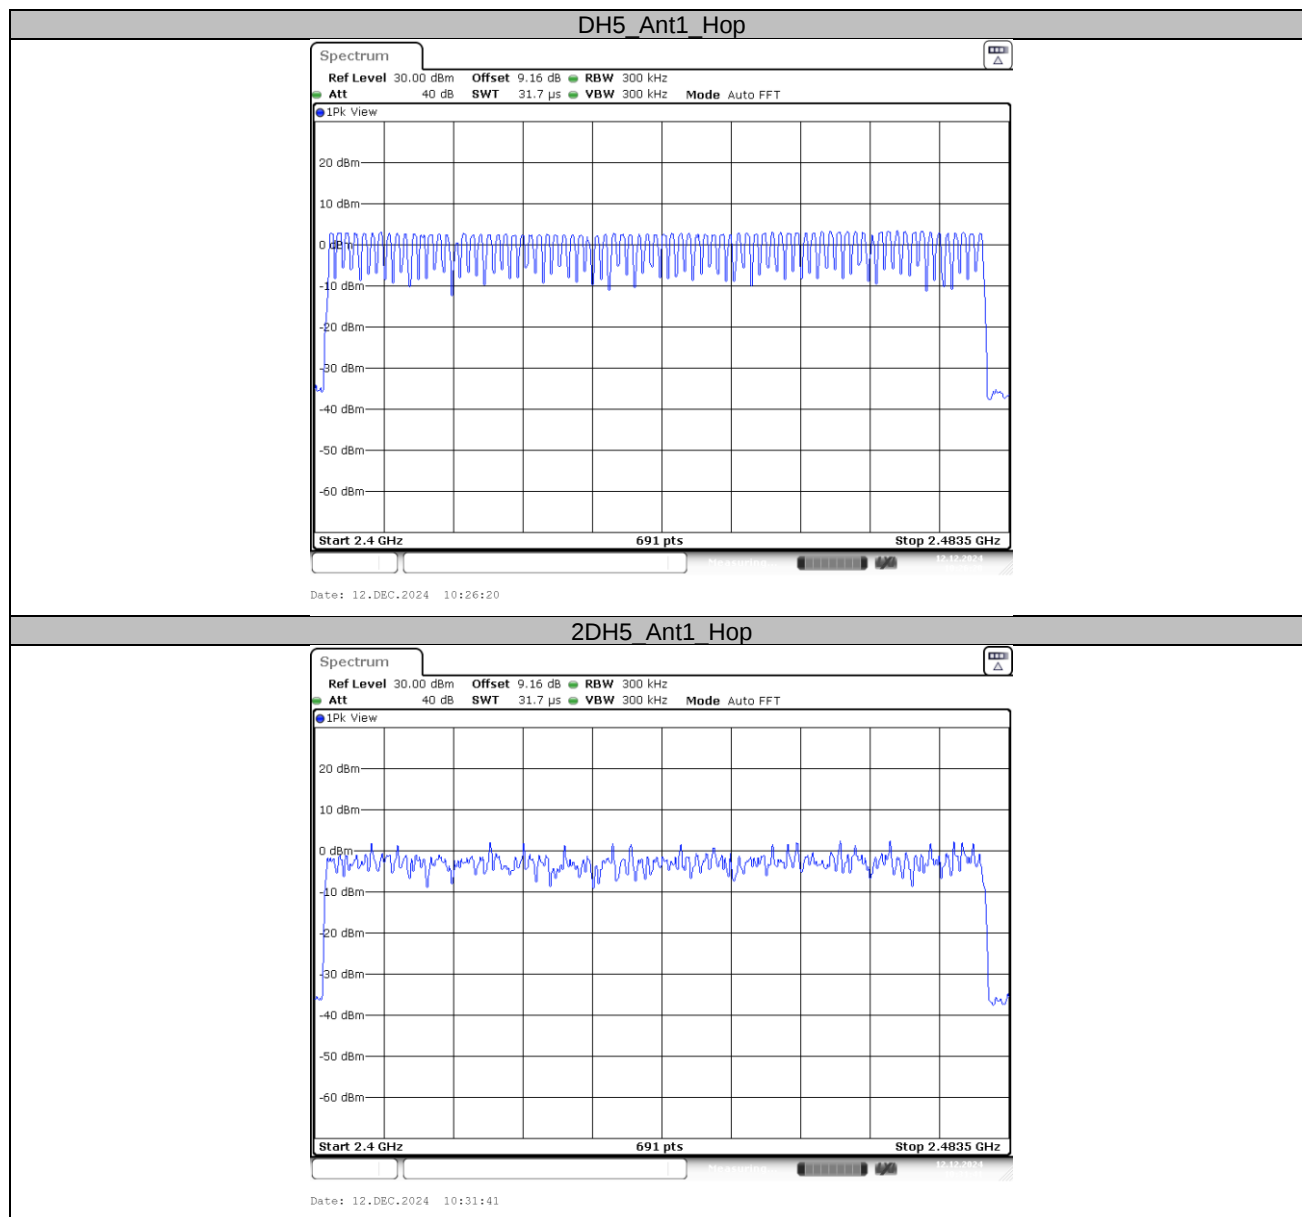

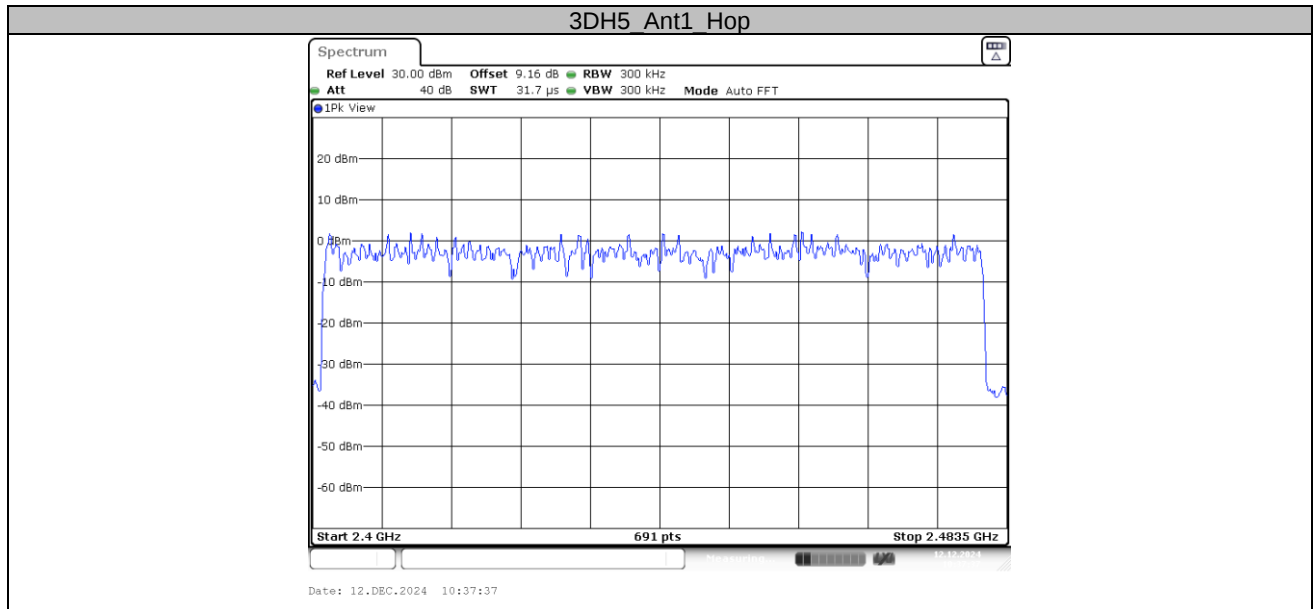

7. DWELL TIME

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz.

The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 sec- onds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.


7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result


TestMode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.371	320	0.119	≤0.4	PASS
DH3	Ant1	Hop	1.620	160	0.259	≤0.4	PASS
DH5	Ant1	Hop	2.860	106.67	0.305	≤0.4	PASS
2DH1	Ant1	Hop	0.380	320	0.122	≤0.4	PASS
2DH3	Ant1	Hop	1.624	160	0.26	≤0.4	PASS
2DH5	Ant1	Hop	2.864	106.67	0.306	≤0.4	PASS
3DH1	Ant1	Hop	0.379	320	0.121	≤0.4	PASS
3DH3	Ant1	Hop	1.623	160	0.26	≤0.4	PASS
3DH5	Ant1	Hop	2.867	106.67	0.306	≤0.4	PASS

DH1_Ant1_Hop

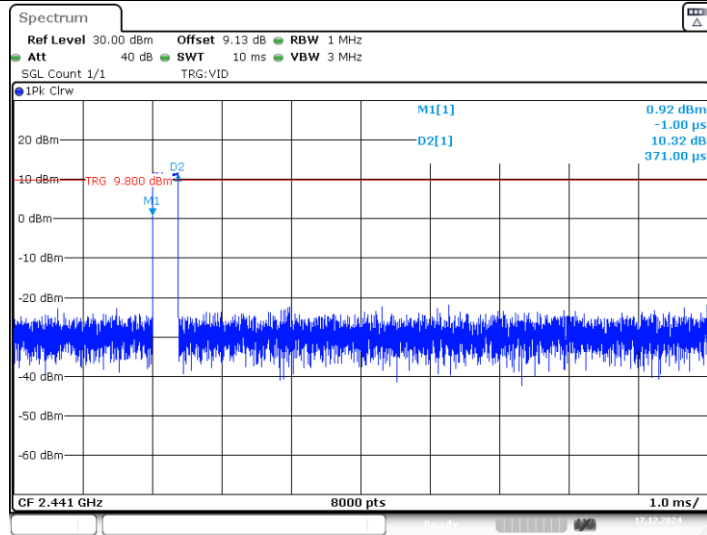


Date: 17.DEC.2024 16:13:56

DH3_Ant1_Hop

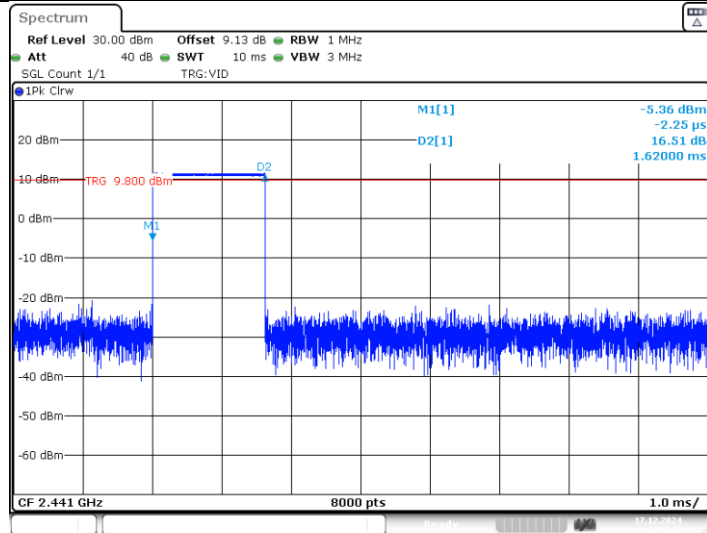


Date: 17.DEC.2024 16:14:22

DH5_Ant1_Hop

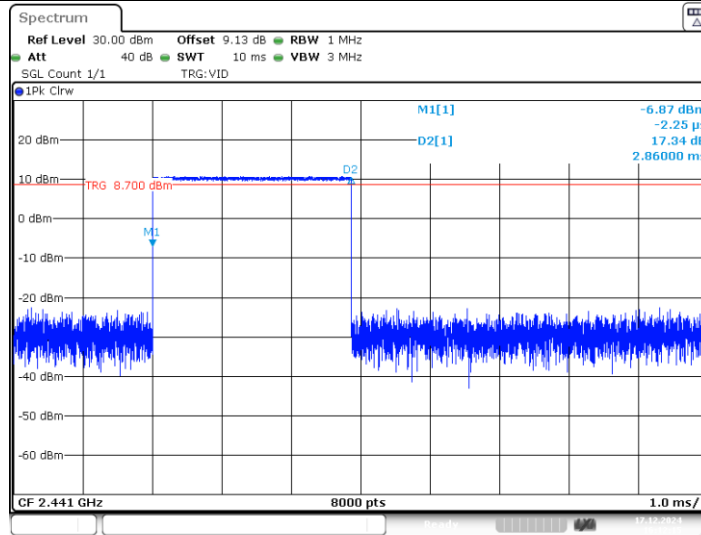


Date: 17.DEC.2024 16:12:15

2DH1_Ant1_Hop

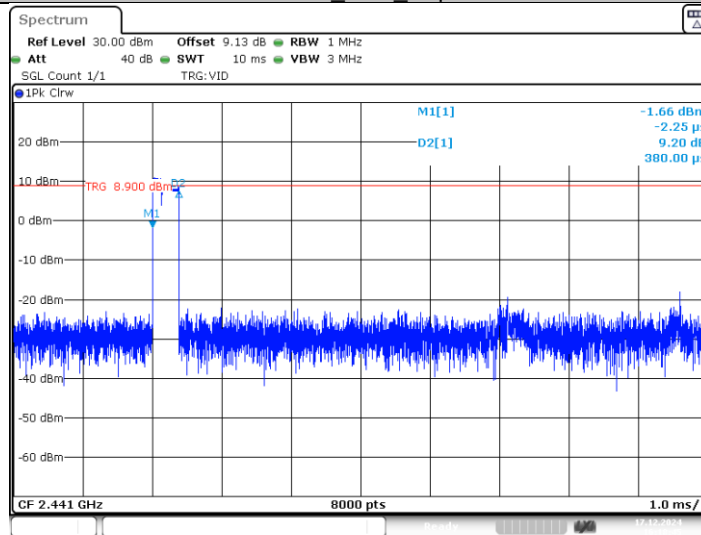


Date: 17.DEC.2024 16:18:45

2DH3 Ant1 Hop

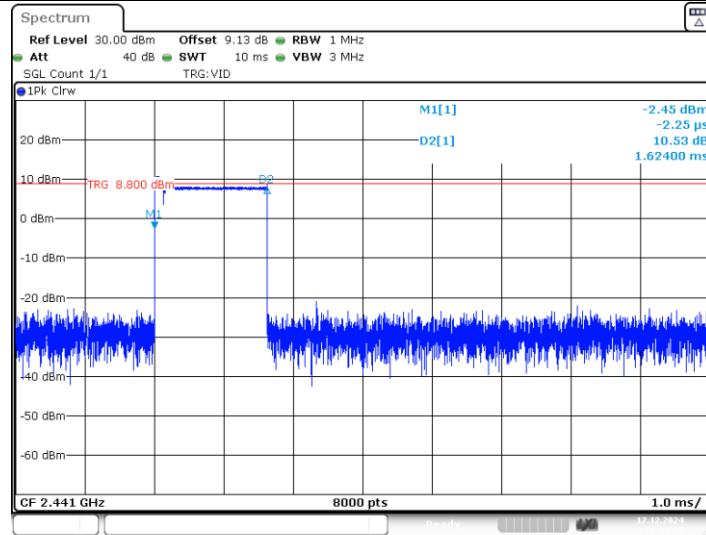


Date: 17.DEC.2024 16:19:57

2DH5 Ant1 Hop

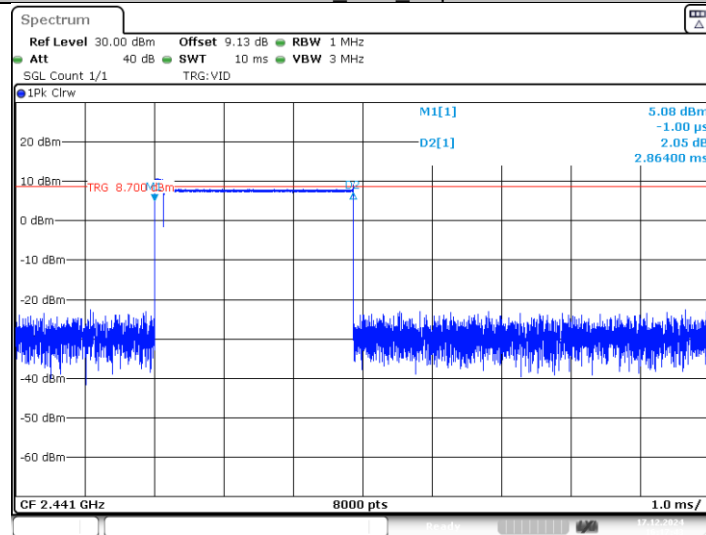


Date: 17.DEC.2024 16:17:44

3DH1 Ant1 Hop

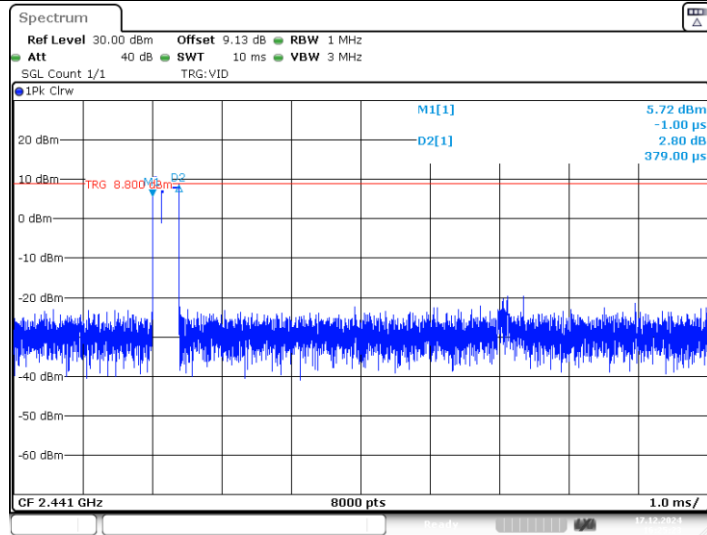


Date: 17.DEC.2024 16:25:24

3DH3 Ant1 Hop

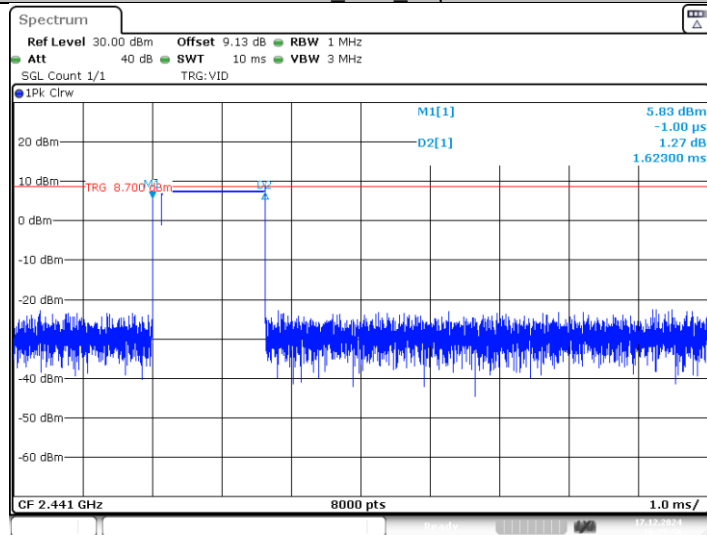

Date: 17.DEC.2024 16:25:50

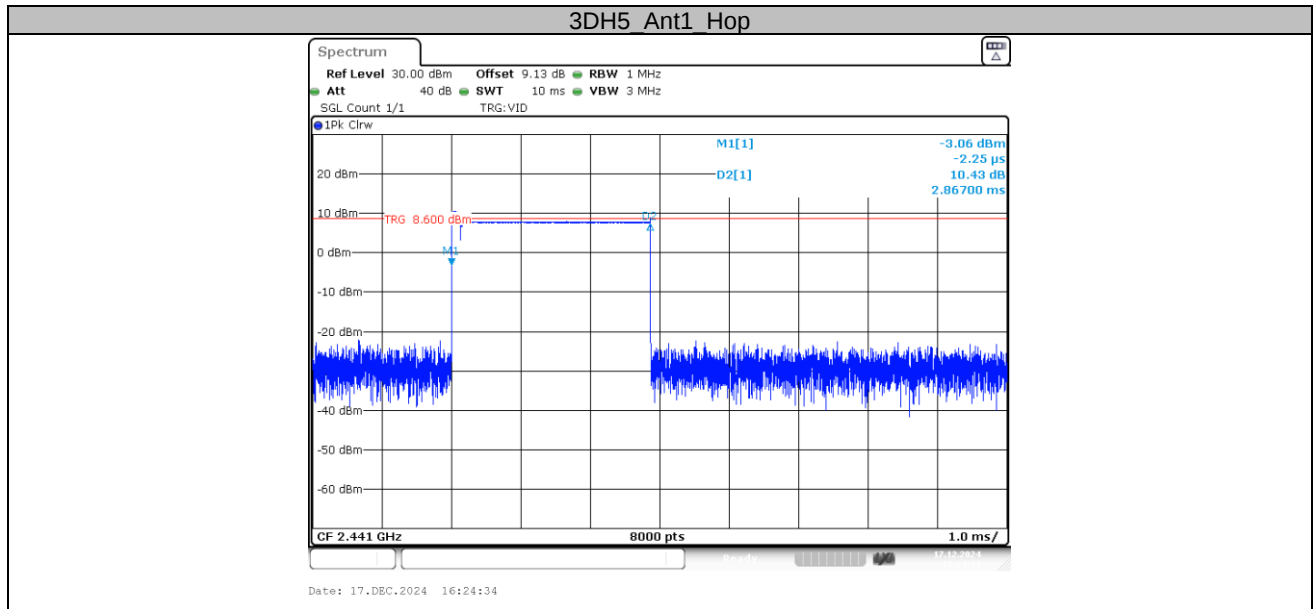

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 88	3	100	40.0
88 216	3	150	43.5
216 960	3	200	46.0
960 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

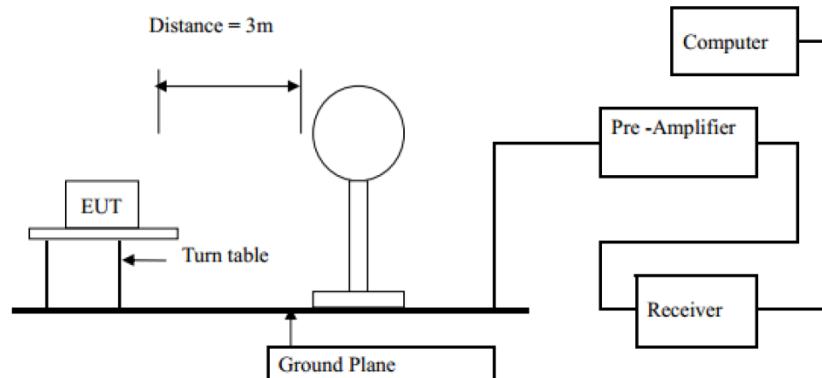

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

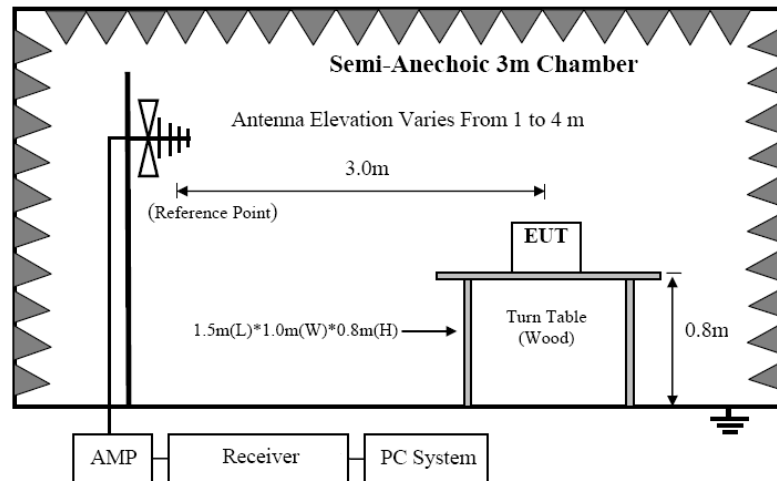

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

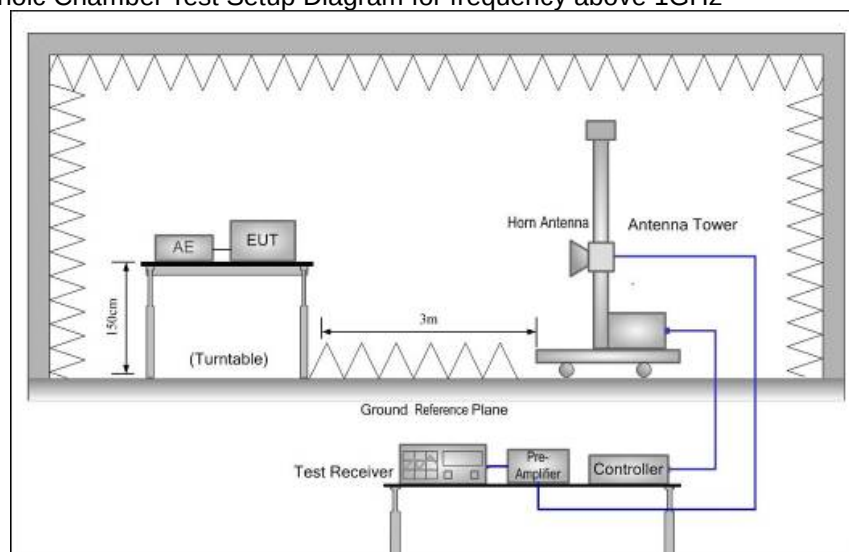

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

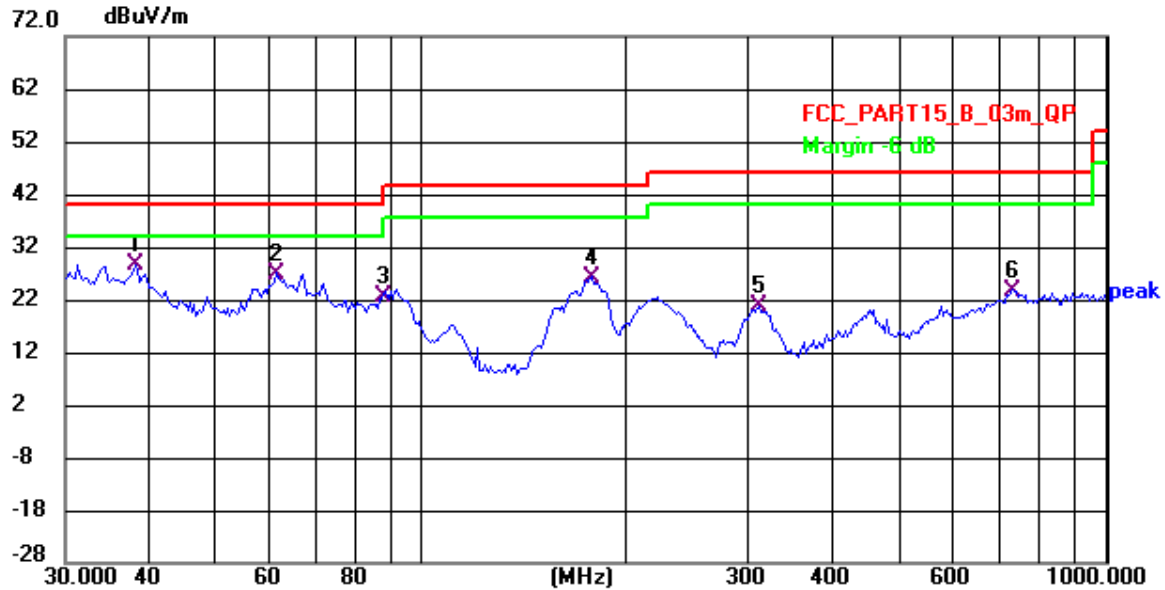

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	38.096	50.83	-22.40	28.43	40.00	-11.57	QP	200	241	P	
2	61.004	49.49	-22.68	26.81	40.00	-13.19	QP	100	136	P	
3	87.914	48.29	-25.76	22.53	40.00	-17.47	QP	200	19	P	
4	177.518	48.22	-22.16	26.06	43.50	-17.44	QP	100	14	P	
5	311.452	42.30	-21.67	20.63	46.00	-25.37	QP	200	167	P	
6	728.897	35.00	-11.23	23.77	46.00	-22.23	QP	200	164	P	

Horizontal:

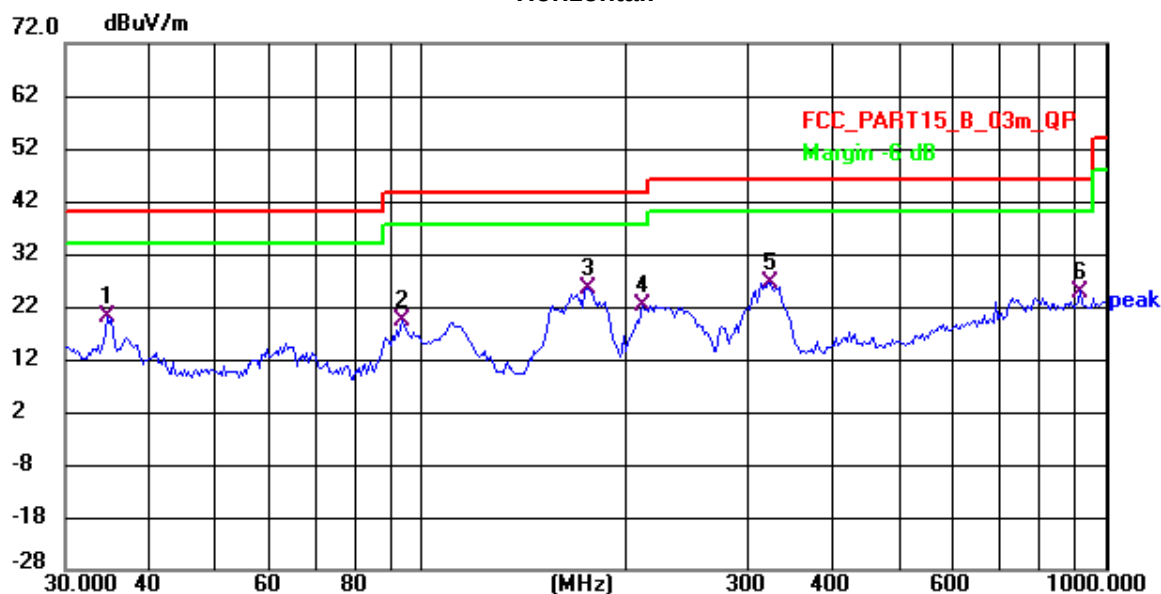

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

From 1G-25GHz

All modes had been tested, only show the worst mode GFSK

Test Mode : GFSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	88.78	-27.21	61.57	74	-12.43	Peak
2	4804	V	69.43	-27.21	42.22	54	-11.78	Avg
3	7206	--	--	--		--		--
4	9608	--	--	--		--		--
5	4804	H	90.26	-27.21	63.05	74	-10.95	Peak
6	4804	H	68.34	-27.21	41.13	54	-12.87	Avg
7	7206	--	--	--		--		--
8	9608	--	--	--		--		--
Test Mode : GFSK TX Mid								
1	4882	V	90.37	-27.84	62.53	74	-11.47	Peak
2	4882	V	70.04	-27.84	42.20	54	-11.80	Avg
3	7323	--	--	--		--		--
4	9764	--	--	--		--		--
5	4882	H	90.92	-27.84	63.08	74	-10.92	Peak
6	4882	H	71.37	-27.84	43.53	54	-10.47	Avg
7	7323	--	--	--		--		--
8	9764	--	--	--		--		--
Test Mode : GFSK TX High								
1	4960	V	90.47	-28.49	61.98	74	-12.02	Peak
2	4960	V	70.08	-28.49	41.59	54	-12.41	Avg
3	7440	--	--	--		--		--
4	9920	--	--	--		--		--
5	4960	H	90.80	-28.49	62.31	74	-11.69	Peak
6	4960	H	69.84	-28.49	41.35	54	-12.65	Avg
7	7440	--	--	--		--		--
8	9920	--	--	--		--	--	--


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

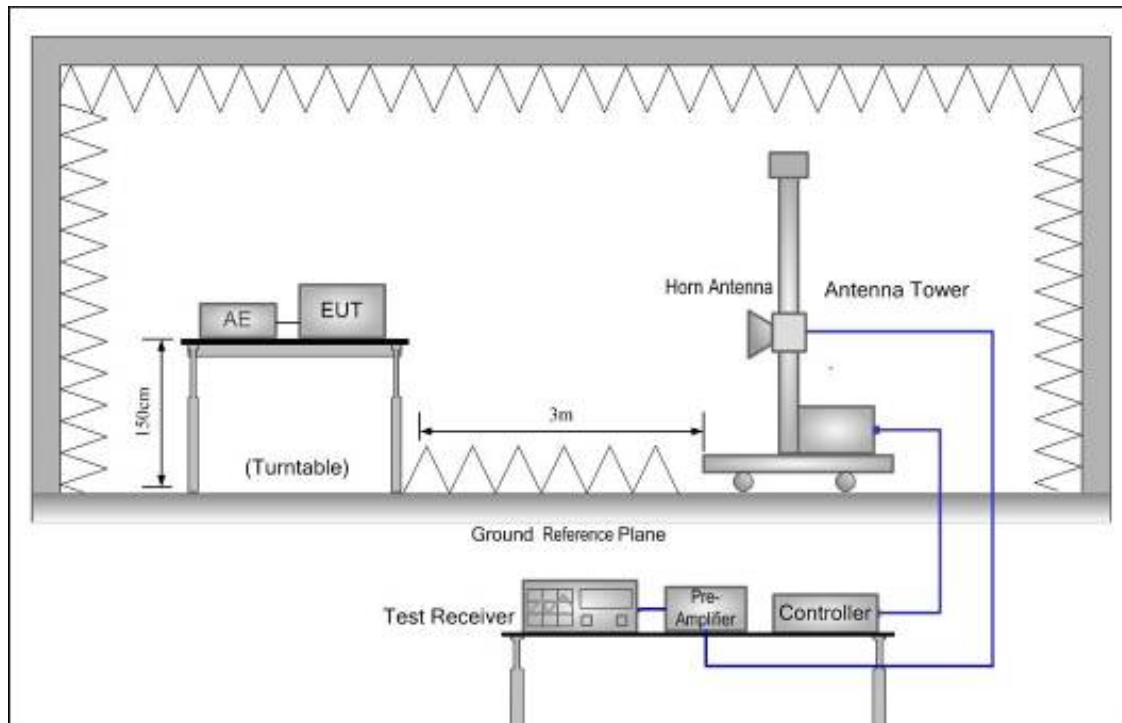

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.

9.4. Test Result

PASS. (See below detailed test data)

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					GFSK TX 2402MHz			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	74.60	-21.47	53.13	74.00	-20.87	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	78.74	-26.12	52.62	74.00	-21.38	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.77	-21.47	53.30	74.00	-20.70	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	78.64	-26.12	52.52	74.00	-21.48	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					GFSK TX 2480MHz			
1	2483.5	H	78.57	-25.29	53.28	74.00	-20.72	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	79.08	-25.29	53.79	74.00	-20.21	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					$\pi/4$ DQPSK TX 2402MHz			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	74.92	-21.47	53.45	74.00	-20.55	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	78.64	-26.12	52.52	74.00	-21.48	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.37	-21.47	52.90	74.00	-21.10	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	78.94	-26.12	52.82	74.00	-21.18	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					$\pi/4$ DQPSK TX 2480MHz			
1	2483.5	H	78.87	-25.29	53.58	74.00	-20.42	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	79.11	-25.29	53.82	74.00	-20.18	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					8DPSK TX 2402MHz			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	75.23	-21.47	53.76	74.00	-20.24	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	79.16	-26.12	53.04	74.00	-20.96	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.91	-21.47	53.44	74.00	-20.56	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	79.60	-26.12	53.48	74.00	-20.52	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					8DPSK TX 2480MHz			
1	2483.5	H	78.51	-25.29	53.22	74.00	-20.78	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	79.07	-25.29	53.78	74.00	-20.22	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					GFSK Hopping			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	75.12	-21.47	53.65	74.00	-20.35	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	79.01	-26.12	52.89	74.00	-21.11	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.60	-21.47	53.13	74.00	-20.87	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	79.20	-26.12	53.08	74.00	-20.92	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					GFSK Hopping			
1	2483.5	H	78.77	-25.29	53.48	74.00	-20.52	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	78.66	-25.29	53.37	74.00	-20.63	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					$\pi/4$ DQPSK Hopping			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	75.03	-21.47	53.56	74.00	-20.44	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	78.93	-26.12	52.81	74.00	-21.19	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.56	-21.47	53.09	74.00	-20.91	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	78.84	-26.12	52.72	74.00	-21.28	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					$\pi/4$ DQPSK Hopping			
1	2483.5	H	79.12	-25.29	53.83	74.00	-20.17	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	79.29	-25.29	54.00	74.00	-20.00	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					8DPSK Hopping			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	75.23	-21.47	53.76	74.00	-20.24	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	78.69	-26.12	52.57	74.00	-21.43	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.46	-21.47	52.99	74.00	-21.01	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	78.84	-26.12	52.72	74.00	-21.28	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					8DPSK Hopping			
1	2483.5	H	79.05	-25.29	53.76	74.00	-20.24	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	79.11	-25.29	53.82	74.00	-20.18	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								