




# wopet CL11 Cube Lite Automatic Cat Feeder User Manual

[Home](#) » [WOPET](#) » wopet CL11 Cube Lite Automatic Cat Feeder User Manual 

wopet CL11 Cube Lite Automatic Cat Feeder

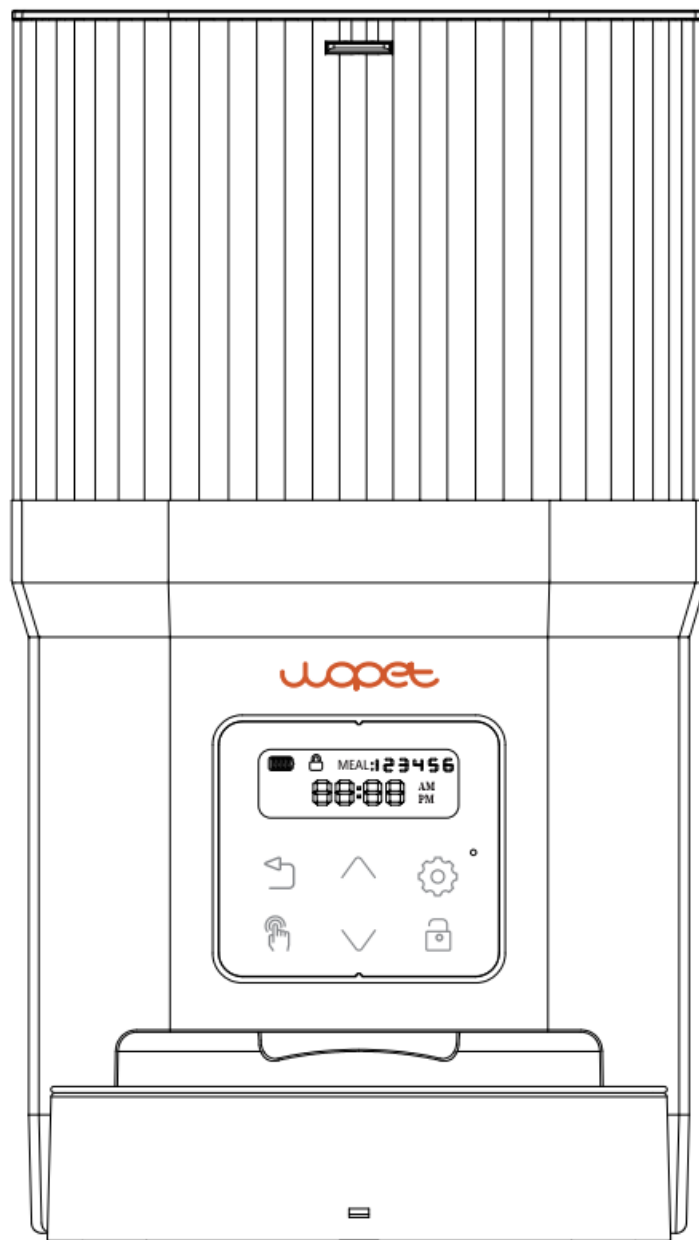

## Contents

### [1 PRODUCT SPECIFICATIONS](#)

#### [2 Product Overview](#)

### [3 FEEDER ASSEMBLY](#)

#### [4 CONTROL PANEL](#)

#### [5 Buttons and Functions](#)

### [6 SETTINGS](#)

#### [7 Set Up Meal Plans and Portions](#)

### [8 FAQs](#)

### [9 FCC WARNINGS](#)

#### [10 Ask Us A Question](#)

#### [11 Warranty Information](#)

### [12 Documents / Resources](#)


#### [12.1 References](#)

### [13 Related Posts](#)

## PRODUCT SPECIFICATIONS

|                        |   |
|------------------------|---|
| Model                  | <b>CL11</b>                                 |
| Capacity               | 4L  |
| Meals                  | 1-6 meals per day                           |
| Screen                 | LCD   |
| One port ion           | 10g / 0.35oz (8 port ions at most per meal) |
| Food size              | 2 – 12mm (dry food only)                    |
| Pet size               | Cat s and small/ medium-sized dogs          |
| Battery-powered supply | 3 x alkaline D batteries (not included)     |
| DC-powered supply      | 5V / 1 A                                    |
| Operating temperature  | -10°C – 55 °C / <b>14 °F</b> – 131°F        |
| Dimensions             | 18x18x20.4cm / 7.1 x7.1 x8.0in              |


## Product Overview

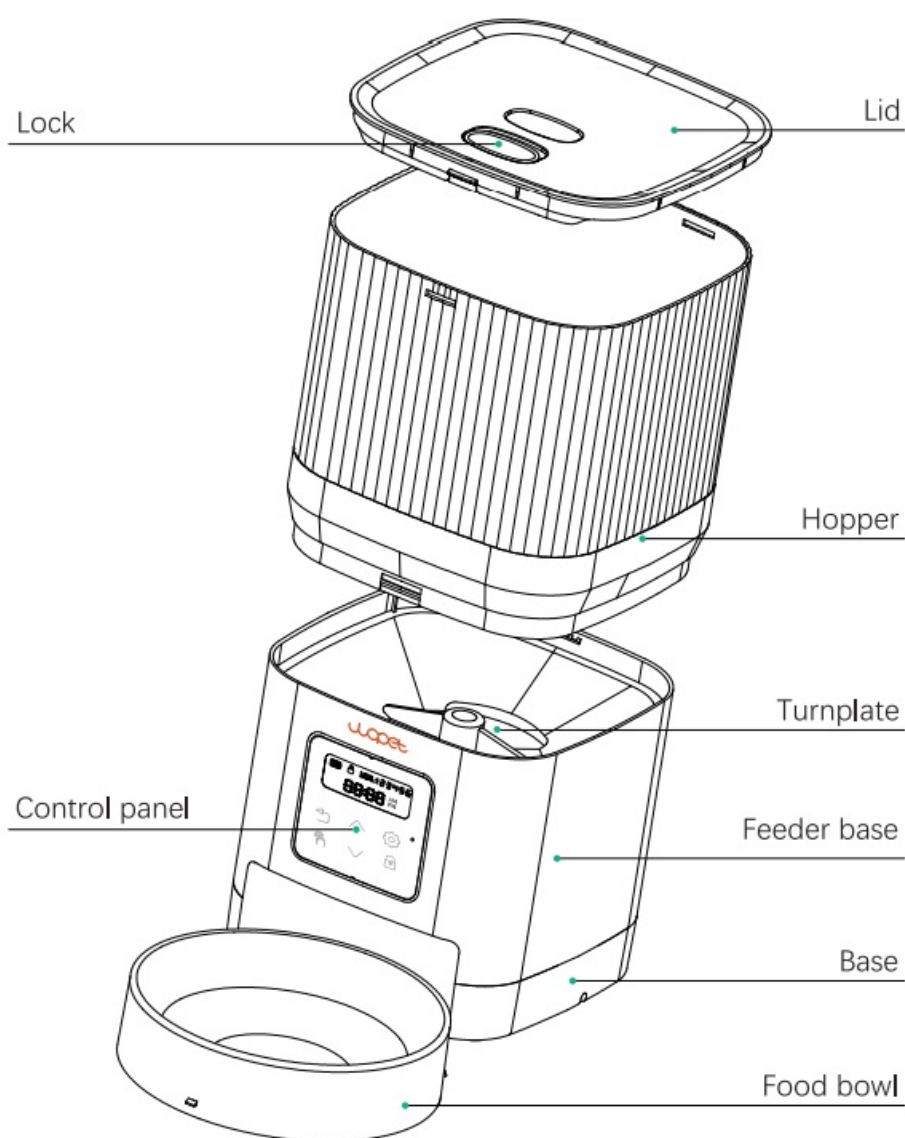

## FEEDER ASSEMBLY


## Take out the bowl

- Take the bowl out and lift the hopper upwards, take out the Type-C charging cable, desiccant, manual, etc

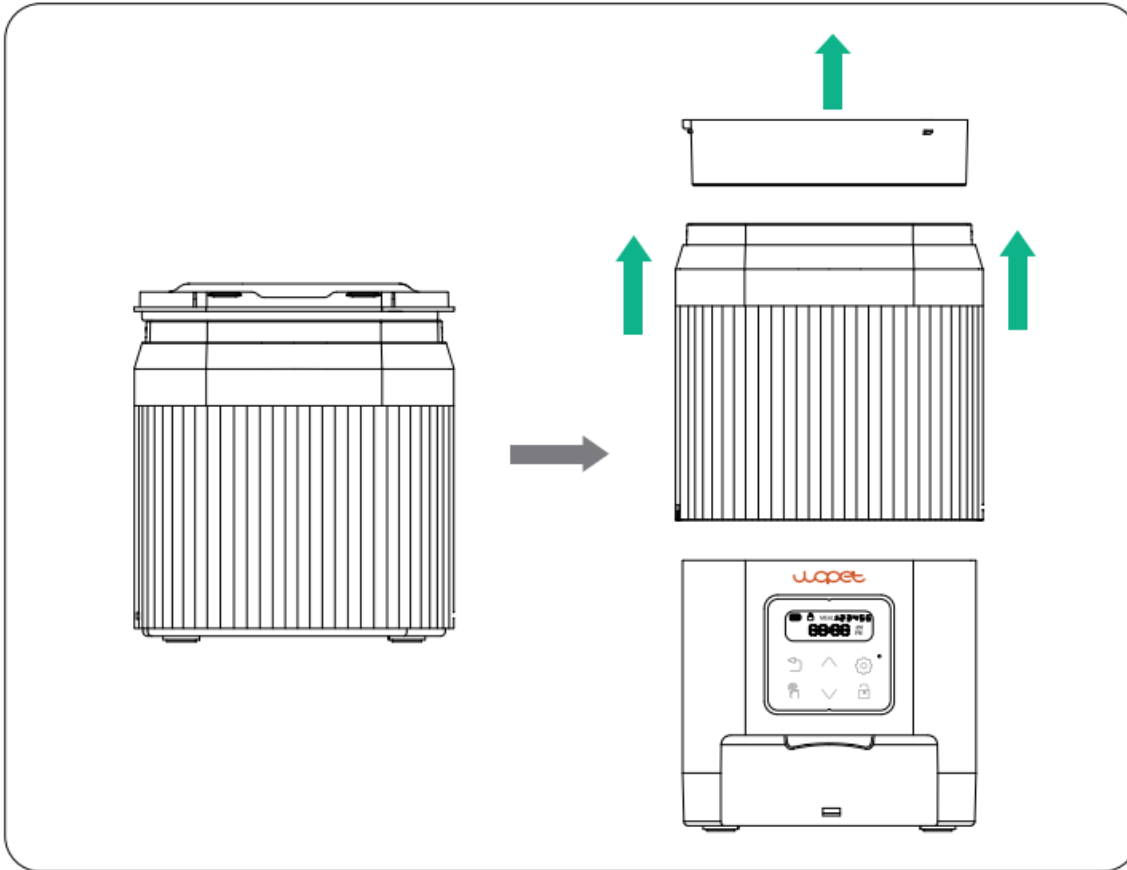

## Load in desiccant


- Open the desiccant cap, put in the desiccant bag, and then close the cap.

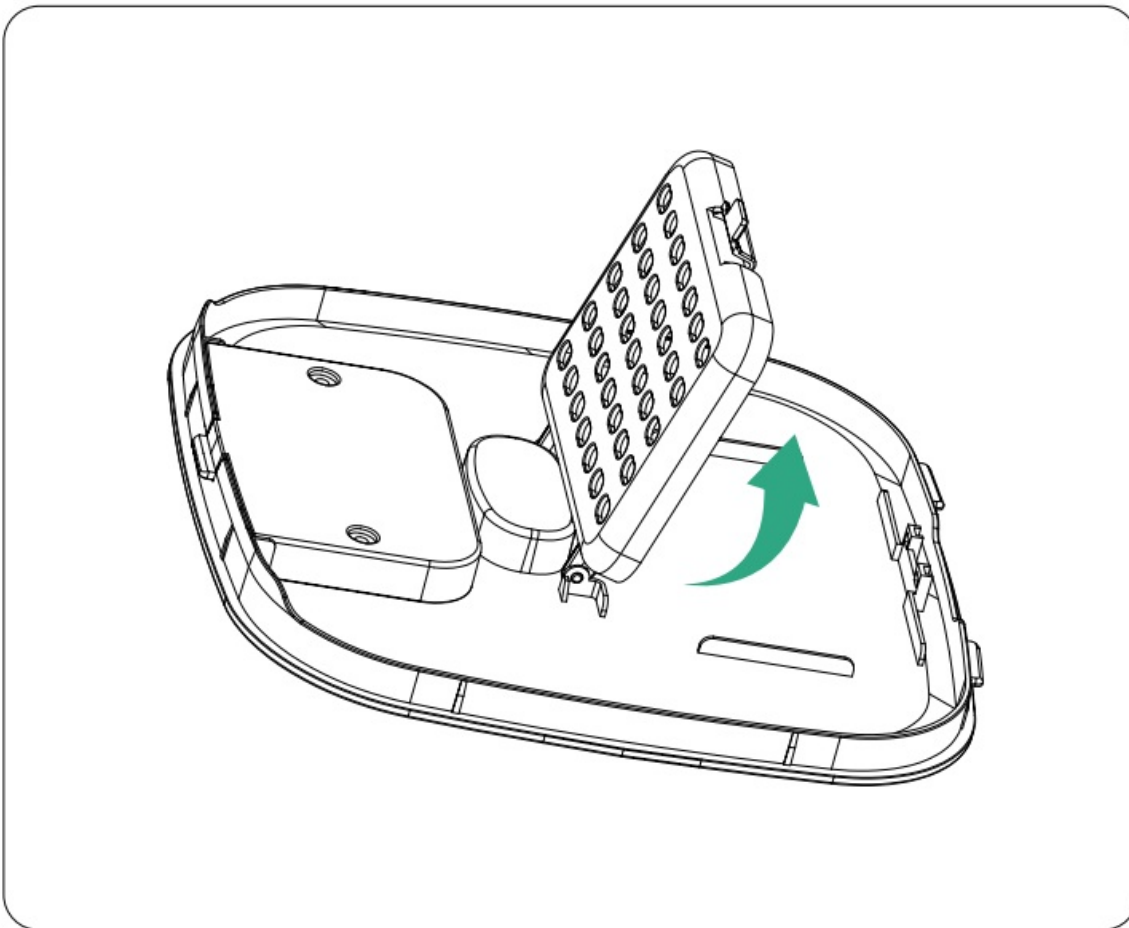

### **Insert batteries or power cable**


- Open the battery cover ① upward according to the indicated position, put in 3D-type batteries. Or, to use a DC power source, insert the Type-C power cable ② put the cable into the cable slot, and finally close the battery cover.

**Note:** The machine will automatically reset after 7 days of a power outage and all the data will be cleared.

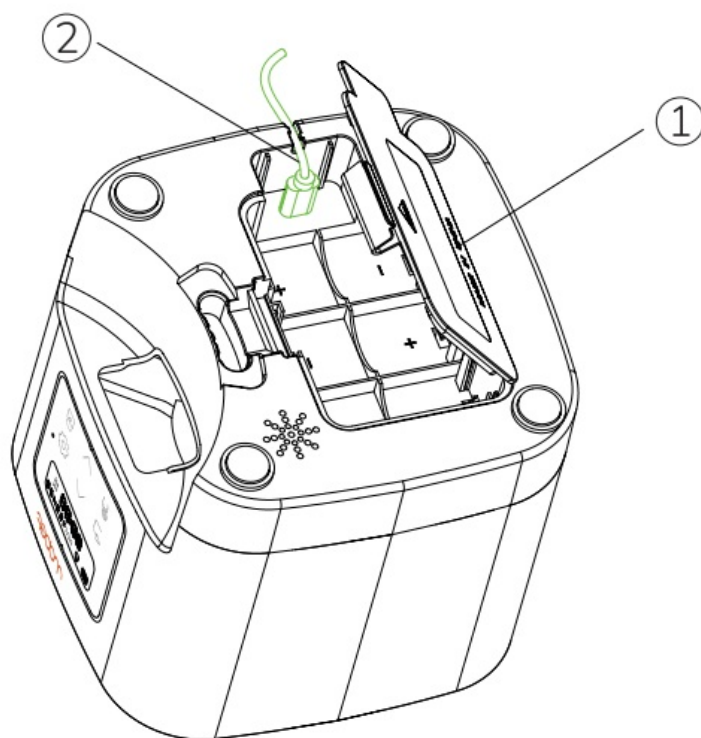


### Install the bowl

- Install the bowl ③ into the base ④ in the direction of the arrow as shown in the figure below.

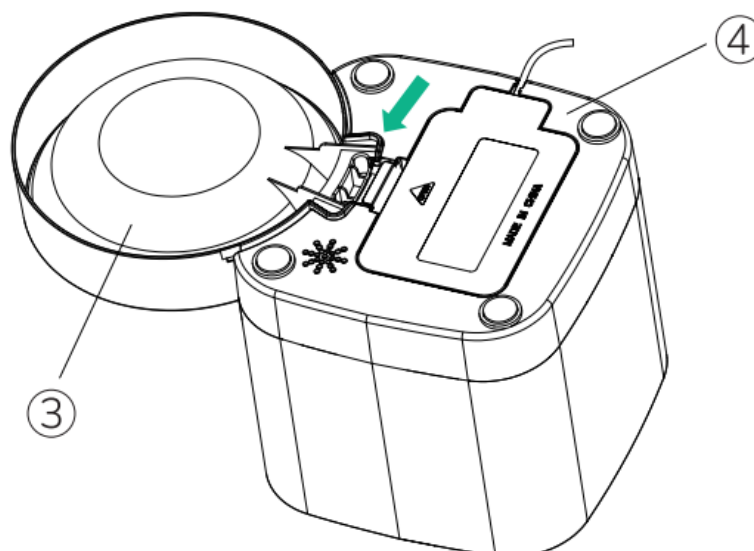


### Install the hopper

- Install the hopper into the feeder base from top to bottom according to the arrow shown in figure (1)(2).

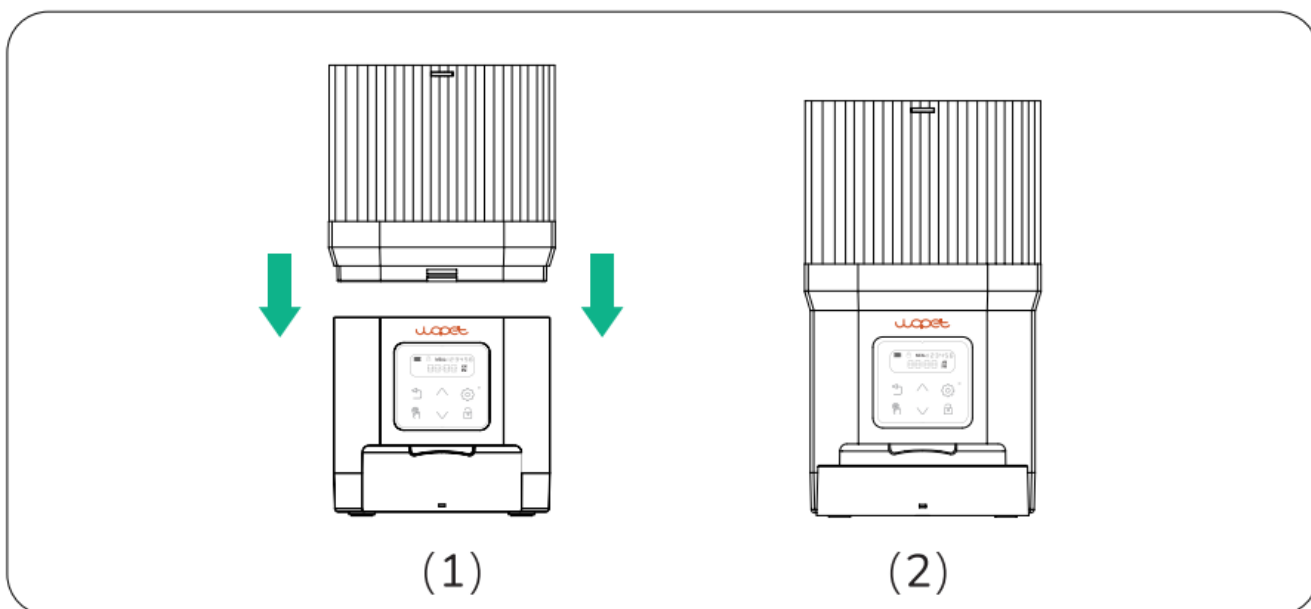


### Install the lid

- First tilt the cover into the slot, as shown in (3), and then press “lock” to close the cover into place, as shown in (4).

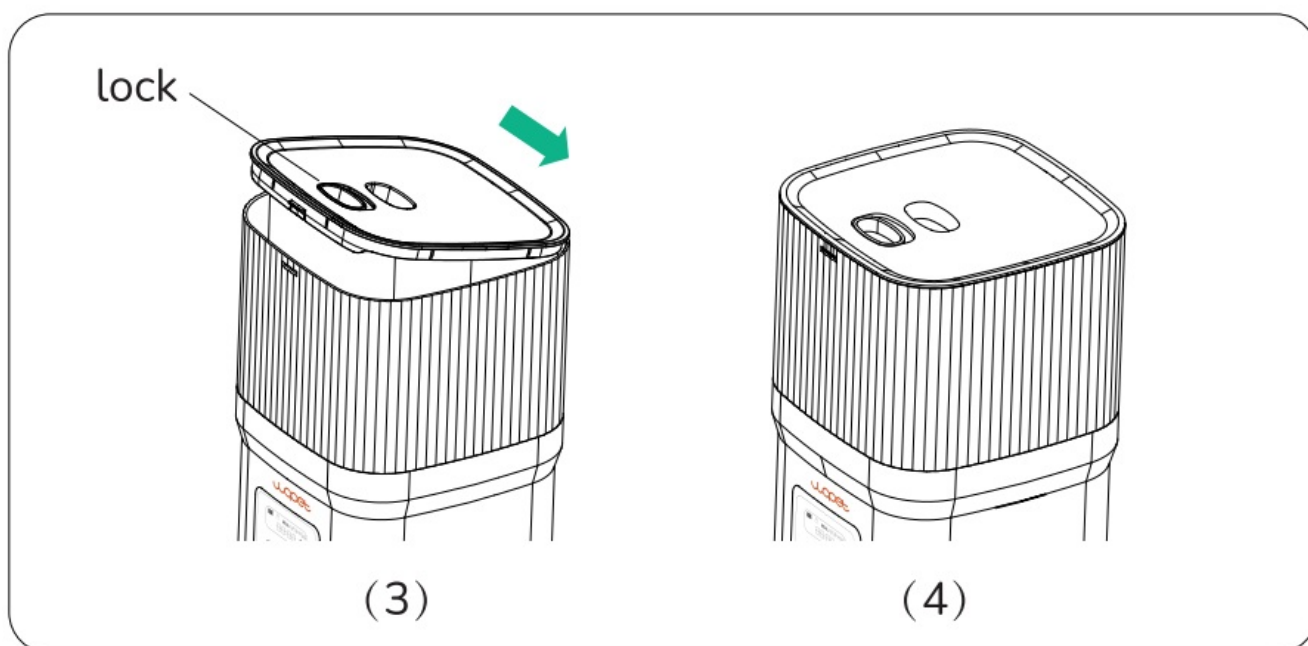


### Clean the hopper

- Fix the base of the machine, lift the tank upward and remove from the base as shown in (5)(6).

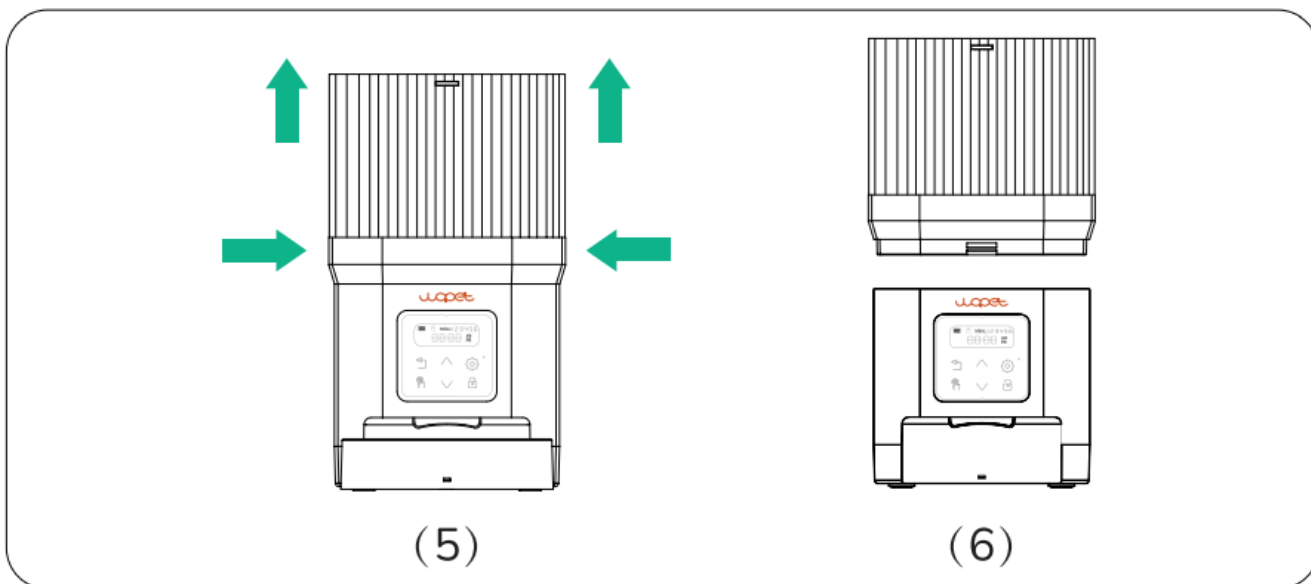





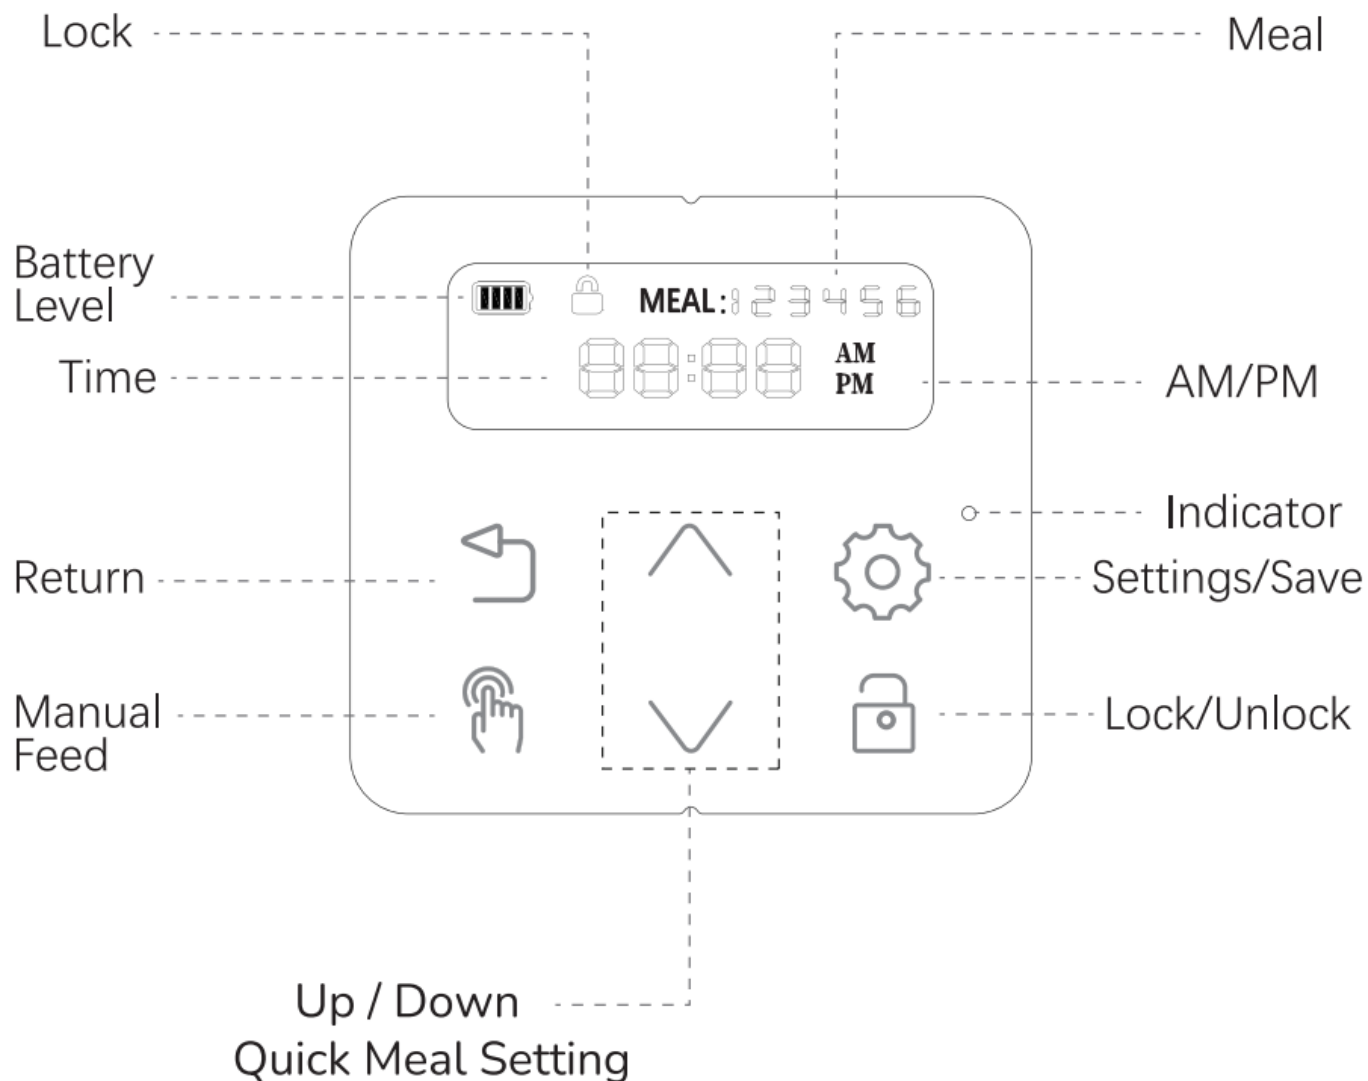



## CONTROL PANEL

Note: When powered by batteries, the screen turns off after about 10 seconds.



## Buttons and Functions




| Button   | Description       | Instructions   |
|--|-------------------|--|
|   | Unlock/ Lock/Save | <ol style="list-style-type: none"> <li>1. In locked state, press button to unlock, the screen will display '1.' indicating the unlocked state.</li> <li>2. Auto-Locks if idle for 1 minute in locked state; screen <i>off</i> (screen turns off).</li> <li>3. Save current settings.</li> </ol> <p><b>Note:</b> Screen turns off on battery power.</p> |
|   | Manual Feed       | In unlocked state, press to release one portion.   |
|   | Return            | In unlocked state, press to return.  |
|   | Settings          | <p>In unlocked state, press to set up alarm → Meal Plan → portions release, and circles back.</p> <p>Press to return at any point during setup.</p>  |
| <br> | Reset             | Hold both buttons for 3s until the red light turns on to reset to factory settings.  |
| <br> | Up / Down         | Quick Meal Setting. In unlocked state, set Meal Plan → Portions.   |




## SETTINGS


Steps for setting up device

### Step 1- Set Up Alarm

Press  to unlock the panel.




#### Set Hour

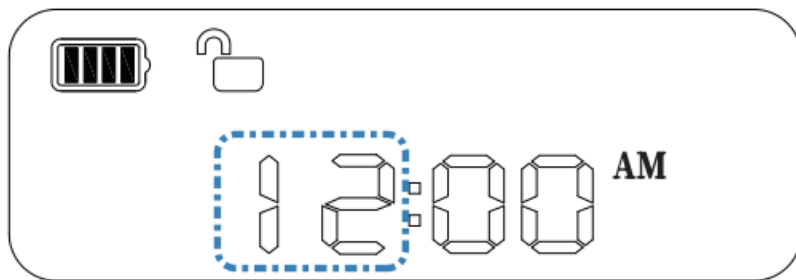
Press  to set up the current time." **12** "on the hour blinks; press or hold  or  to go up or down.



(Diagram 1.1)




### Set Minute

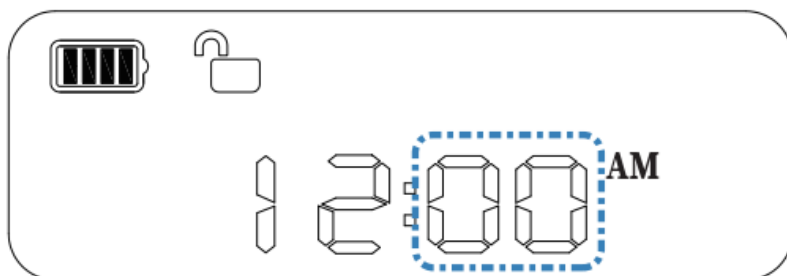
After setting hour, press  to set the minutes, press or hold  or  to go up or down.



(Diagram 1.2)



### AM/PM Settings

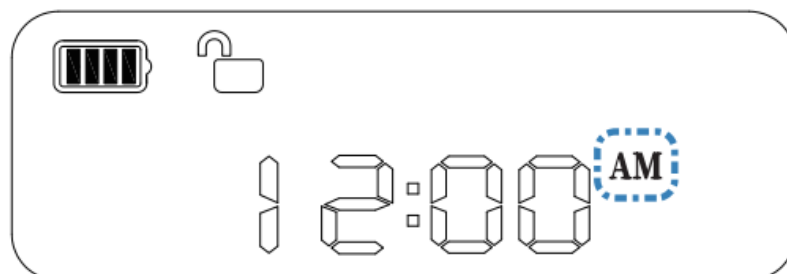

After setting hour/minute, press  or  to choose AM/PM, then press  again to save current time and proceed to next step.




(Diagram 1.3)




### Set Up Meal Plans and Portions


After the above settings, press  or  to enter meal plan scheduling and portion setting.

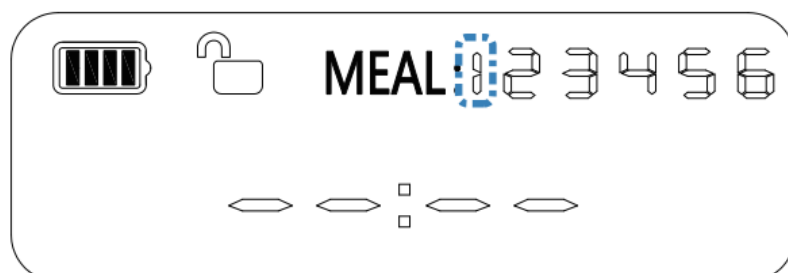Press  or  to set up the time for meal 1-6, the corresponding meal number will blink.






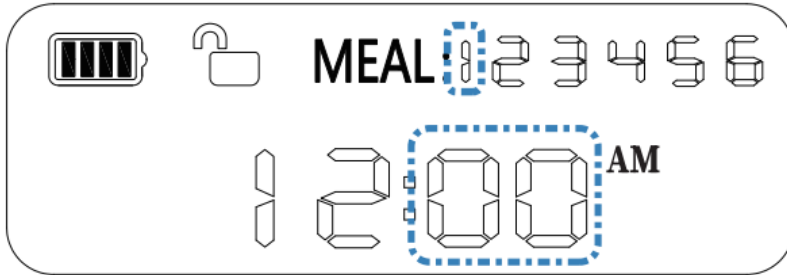
(Diagram 2.2)

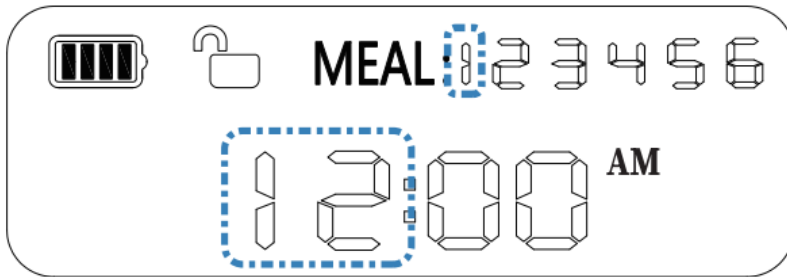Press  and the "12" on hour will blink. Press or hold  or  to go up or down.






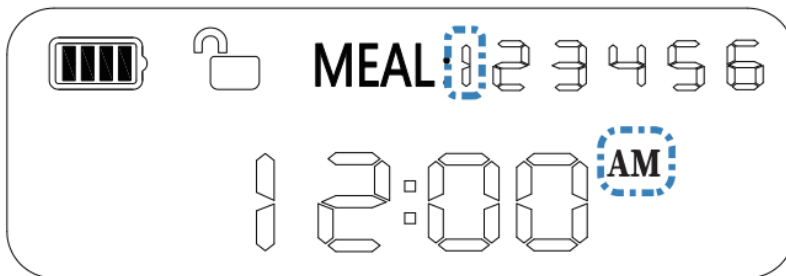
(Diagram 2.3)

Press  and the "00" at minute flashes, press or hold  or  to go up or down.




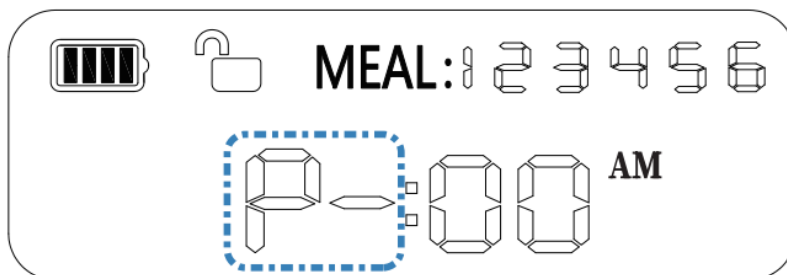
(Diagram 2.4)

After hrs/mins settings, AM/PM flashes, press  or  to set AM/PM, then press  again to save the alarm and enter the next step.



(Diagram 2.5)



After setting up meal schedules, press @ , **P - : 0 0** appears.



(Diagram 2.6)

Press  or  to set the meals (1-6 meal); and press  to save the current settings and go to the next schedule.

#### Note:

1. Press  to save during setup or  to return.
2. To remove meal plans, go to the specific plan, and set portion to **P - : 0 0 ..**

## FAQS

### Q: Why don't the feeder's control panel buttons work?

A: Ensure it's not locked. Press the "lock" button to unlock for use.

### Q: Why is food dispensed unevenly?

A: Initially, portions may vary. It normalizes from the third dispensing.

### Q: How to prevent food jams?

1. Don't compress food.
2. Use food within size limit (2-12mm).
3. Clean regularly to avoid clumps.

### Q: What is the battery life on battery mode?

1. Up to 180 days (Reference only)
2. Requires 3 new, same-spec batteries.
3. Battery life varies with temperature.
4. Batteries as a backup when using power.


### Q: What to do if pressing the button does not release food?

1. Check if there is still food left in the hopper.
2. Ensure the outlet isn't blocked.
3. Food size should not exceed limit.






### Q: What to do if I only set one meal?

A: Confirm Time/M meal/Portion and press  to complete/save all settings.

### Q: Quick return to main page?

A: Press  until the screen stops changing.

### Q: How to cancel or view a specific meal plan?

1. In unlocked mode, press  or  to go to "1-6" settings
2. Select meal and press  to skip time to view portions.
3. Reset P – : 0 1-P – : 0 8 to P – : 0 0 by pressing  or  to cancel the meal plan.

### Q: Can it be used outdoors?

A: Recommended for indoor use to protect from rain and moisture.

## FCC WARNINGS

- Changes or modifications to this unit are not expressly approved.

- Non-compliance could void the user's authority to operate the equipment.

#### Notes:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and receiver.
- Connect the equipment into an outlet on a different circuit than the one the receiver is currently connected.
- Consult the dealer or an experienced radio/TV technician for help. Shielded interface cables must be used with the equipment in order to comply with the limits for a digital device pursuant to Sub part B of Part 15 of FCC Rules. Specifications and designs are subject to change without any notice or obligation on the part of the manufacturer.

#### Ask Us A Question

1. Find your order



2. Click "View order details"




3. Click the Seller name

### View order details

Order#

Order Total

### Shipped

 Product link

Qty: 1

Sold By: Seller

Click "Ask a question"

### BRAND

Have a question  
for the seller?

Ask a question


- Complimentary parts, replacements, consumable products are not covered by the 2-year warranty.
- Manufactures' warranties may not apply in all cases, depending on factors such as use of the product, where the product was purchased, or who you purchase the product from.
- Please review the warranty carefully, and contact the manufacture if you have any questions.

### Warranty Information

- If you have any problems when using our products, please send us an email at [support@wopet.com](mailto:support@wopet.com)
- 30 days free Return & Replacement
- Standard Warranty: 1-Year product Warranty 2-Year Warranty Application: Please scan the QR code to finish the registration form on our official website within 30 days after you received the items.



## Documents / Resources

|  |  |
|--|--|
|  | <p><a href="#">wopet CL11 Cube Lite Automatic Cat Feeder</a> [pdf] User Manual<br/>CL11, CL11 Cube Lite Automatic Cat Feeder, Cube Lite Automatic Cat Feeder, Automatic Cat Feeder, Cat Feeder, Feeder</p> |
|--|--|

## References

- [User Manual](#)

### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.