


# N6


## ALL IN ONE PORTABLE CHARGER POWER BANK WITH BUILT-IN CABLES

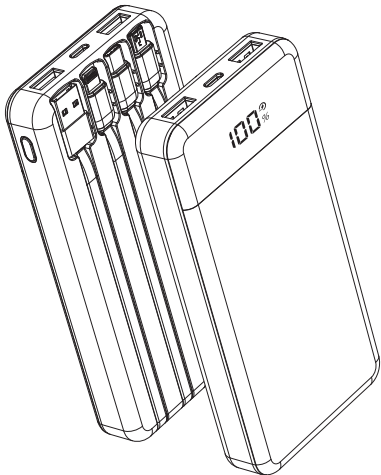

### USER MANUAL

Please read this user manual carefully before using the product.


# Packing List



Portable Charger



User Manual



USB-A to TYPE C  
Charging Cable

## Packing List:




Portable Charger \*1

USB-A to TYPE C Charging Cable \*1

User Manual \*1

**Notice:** The separate USB-A to Type-C charging cable in the package is used to charge the portable charger.

# Product Introduction

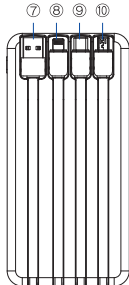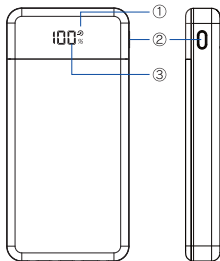

- ① Green Fast Charging Marker
- ② Power button
- ③ LED power display
- ④ USB-A output 2
- ⑤ Type-C input/output
- ⑥ USB-A output 1
- ⑦ USB-A cable input
- ⑧ iOS cable output
- ⑨ Type-C cable output
- ⑩ Micro cable output

# ON/OFF Button Function

## In Standby Mode:


Press ON/OFF button once, the power bank will turn on and LED will light up to show the remaining power level.

Press ON/OFF button twice, the LED will go out and power bank will turn off.

## In Charging Mode:

When the power bank is connected to your device, it will automatically turn on and charge your device without having to press the ON/OFF button again.

When you don't need the power bank to charge your device, you can press the ON/OFF button twice to turn off the power.



# LED Display Status



## LED Display Status:

### 1. Input:

Digital display digit flashes when charging.

Green Fast Charging Marker **always** on when fast-charging input.

Digital display **always** on when the power bank is **fully** charged.

### 2. Output:

Digital display **always** on when discharging.

Green Fast Charging Marker **always** on when fast-charging output.

## Key Functions:

1. Press once the on/off button to display the power level.
2. Press twice the on/off button to cut off the power output.


# Specification

Product Name:	Portable Charger with Built-in Cables
Model number:	N6
Battery Capacity:	35000mAh
Power:	3.7V, 129.5Wh
Type-C Input Port:	5V/3A, 9V/2A, 12V/1.5A
USB-A Input Cable:	5V/2.0A
Type-C Output Port:	5V/3A, 9V/2.2A, 12V/1.67A
USB-A Output Port 1:	5V/2.1A
USB-A Output Port 2:	4.5V/5A, 9V/2.22A, 12V/1.67A, 5V/4.5A
Type-C Output Cable:	5V/3A, 9V/2.2A, 12V/1.6A
iOS Output Cable:	5V/2.1A
Micro Output Cable:	5V/2.1A
Product Size:	151*73*20mm
Product Weight:	335g

# Recharge Power Bank

## Recharge Through Type C Input Port:

1. Plug the Type-C port of our included charging cable into the Type-C input port of the power bank.
2. Plug the other end of included charging cable (the USB port) into AC adapter or into a power supply device with a USB jack (such as a PC).
3. When charging, the LED lights up and the LED digital display indicates the battery level.
4. When the LED digital display shows "100%", the battery is fully charged.

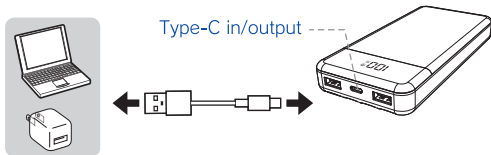


### Notice:

1. The AC adapter is not included in the package.
2. In order to improve the charging speed, please charge the power bank with an adapter above 18W.
3. Check the orientation of the connector and connect it in the correct direction.

## Recharge Through Built-in USB-A Input Cable:

1. Plug the Built-in USB-A charging cable into AC adapter or into a power supply device with a USB jack (such as a PC).
2. When charging, the LED lights up and the LED digital display indicates the battery level.
3. When the LED digital display shows "100%", the battery is fully charged.

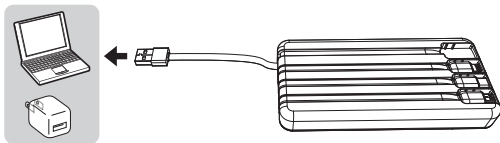

### Notice:


1. The AC adapter is not included in the package.
2. In order to improve the charging speed, please charge the power bank with an adapter above 18W.
3. Check the orientation of the connector and connect it in the correct direction.



# Charge Your Phone


## Charge Through Output Ports:

1. Take out the charging cable that came with your phone, connect the correct ports to the power bank and your phone respectively.
2. The power bank will automatically turn on and charge your phone.
3. When charging, the LED lights up and the LED digital display indicates the battery level.

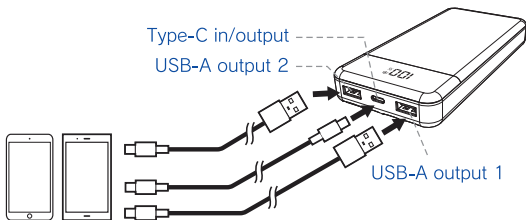

## Charge Through Built-in Output Cables:

1. Connect the power bank's correct Built-in cable to your phone.
2. The power bank will automatically turn on and charge your phone.
3. When charging, the LED lights up and the LED digital display indicates the battery level.



Micro  
Output Cable



Type-C  
Output Cable



iOS  
Output Cable

### Notice:

Please kindly notice that the USB-A Cable is for input ONLY.

# Frequently Asked Questions

## **Q: How long does it take to fully recharge the power bank?**

1A charger:	12 hours
5V 2A charger:	9 hours
18W+ fast charging charger:	7 hours

## **Q: Fails to recharge power bank.**

### **1. First Time Using:**

When using it for the first time, please recharge the power bank after the remaining power is depleted.

### **2. The LED digital is still stuck at a certain value after a long recharging period:**

Please deplete the power bank then recharge it again to see if it works.

### **3. Check if the connection between the charging cable, adaptor and the socket is loose.**

### **4. Replace a charging cable, adaptor or socket to recharge the power bank.**

## **Q: Fails to charge your phone.**

### **1. Check whether the power bank has enough power.**

### **2. Ensure that the device is properly connected to the power bank.**

### **3. Use the power bank to charge other devices to confirm whether the power bank can work normally.**

**Q: When charging, the power bank is hot and there is a slight current sound.**

It is normal for the power bank to heat up slightly during the charging process, but if you feel that the temperature of the power bank is abnormal or very hot, please disconnect the device in time and stop charging.

**Q: Can I bring this power bank on board?**

Sorry, please notice that this power bank can not be carried on a plane.

**Q: Is the AC adapter included in the package?**

Sorry, there's no adaptor include in the package, please use your own adaptor to recharge the power bank.

# Important Safety Instructions

**When using this product, basic precautions should always be followed including the following:**

- 1) Store product in a cool and dry place.
- 2) Do not store the product in hot or humid environments.
- 3) Do not dispose of the product in heat or fire.
- 4) Do not clean the product with harmful chemicals or detergents.
- 5) Please store it out of the reach of little children.
- 6) Misuse, dropping, or excessive force may cause product damage.
- 7) Using a power supply or charger that is not recommended or sold by the product manufacturer may result in a risk of fire or personal injury.
- 8) Do not use connectors once the terminals are bent.
- 9) When connecting the connector, check the insertion direction and insert the connector directly.
- 10) Operating temperature should be between 32°F to 113°F/ 0°C to 45°C.
- 11) The power USB interface of this product is specially used for charging and powering USB devices. Please do not use this product for other purposes.
- 12) If the battery is hot or abnormal, please discontinue use immediately.
- 13) Do not disassemble the product. Take it to a qualified service person when service or repair is required. Incorrect reassembly may result in a risk of fire or personal injury.
- 14) If the product is not being used a long time, it should be charged and discharged every three months.
- 15) The product may feel warm when charging the device, which is a normal operating situation and should not be a cause for concern.

# After-sales Service

If you have any questions while using the product, you can contact us in the following ways, it will be our pleasure to support you.

1. Go to the Amazon website and log in to your account.
2. Click on the "Orders" button located in the top right corner of the screen.
3. Locate the order that you need help with and click on the "Contact Seller" button.
4. Choose the reason for your inquiry from the drop-down menu and provide a brief description of your issue.
5. Click on the "Send" button to submit your message to us.
6. Alternatively, you can also go to the product details page on Amazon and click on the "Ask a Question" button.

**When describing your issue to us, we recommend that be concise and clear, preferably with pictures showing the problem. This will help us understand your problem and provide you with the best solution as soon as possible.**

成品尺寸：80\*100mm

材质：105g铜版纸

印刷：四色

折叠方式：风琴七折页