
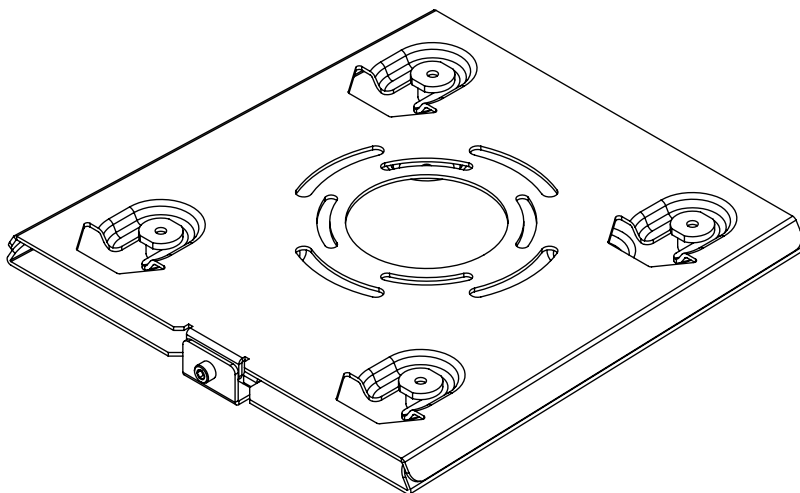


SHURE



A900-CM












▲ WARNING

ENG - This product is designed for use only with Shure MXA920W-S, MXA920W-S-60CM, MXA901W-S, MXA901W-S-60CM, MXA902W-S, MXA902W-S-60CM, MXA920W/B/AL-R. This product is designed to be installed on wood joist/beam or solid concrete ceilings. Hardware is included for wood joist/beam and solid concrete installation. Before installing make sure the supporting surface will support the combined load of the equipment and hardware. Screws must be tightly secured. Do not overtighten screws or damage can occur and product may fail. Never exceed the Maximum Load Capacity. Always use an assistant or mechanical lifting equipment to safely lift and position equipment. This product is intended for indoor use only. Use of this product outdoors could lead to product failure or personal injury. Be careful not to pinch fingers when operating the mount. For support please call customer care at 1-800-865-2112.

ENG Symbols

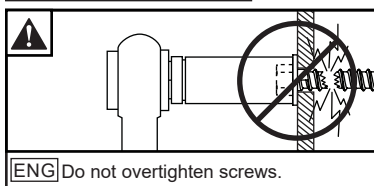


ENG Tools Needed for Assembly.

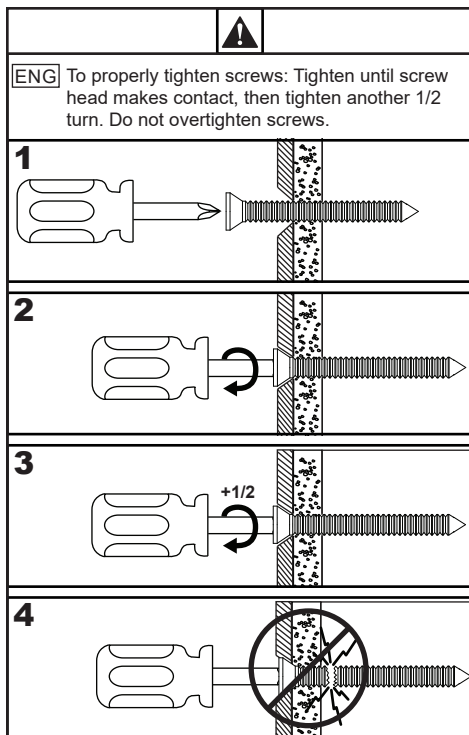



ENG Parts (Before beginning, make sure you have all parts shown below).

Parts List		
Description	Qty	Part#
A ceiling plate	1	10010122
B ceiling adaptor plate	1	10009762
C M4 x 8mm screw	4	520-2237
D #14 x 2-1/2" wood screw	4	5S1-015-C04
E 8mm anchor	4	590-0320
F 4mm allen wrench	1	560-1145


A (1)
ceiling plate

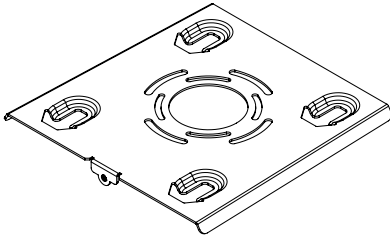


B (1)
ceiling adaptor plate

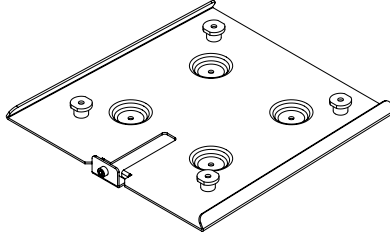

D (4)
#14 x 2-1/2" wood screw




E (4)
8mm anchor



F (1)
4mm allen wrench




1



ENG Wood joist/drywall




1a



ENG Concrete Ceiling




1b



ENG Plywood




1c



ENG Wood joist



1d

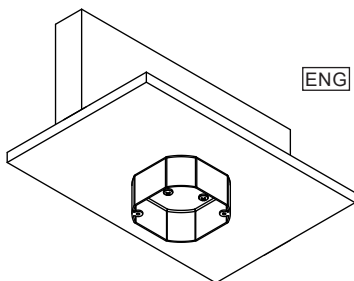

ENG RACO125





1e

1a


⚠ WARNING

ENG - When installing Peerless ceiling mounts on a wood joist/beam covered with gypsum board (drywall), verify that the joists or beams are a minimum of 2" x 4" nominal size. Do not install over gypsum board thicker than 5/8".

1a-1






1/2"
(13mm)
MIN

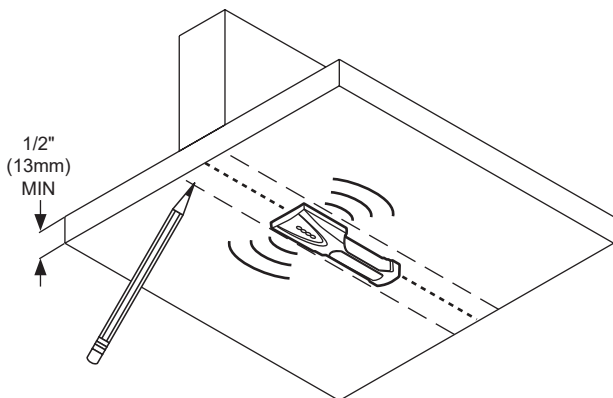


1a-2


ENG Mark mounting holes on stud center lines.

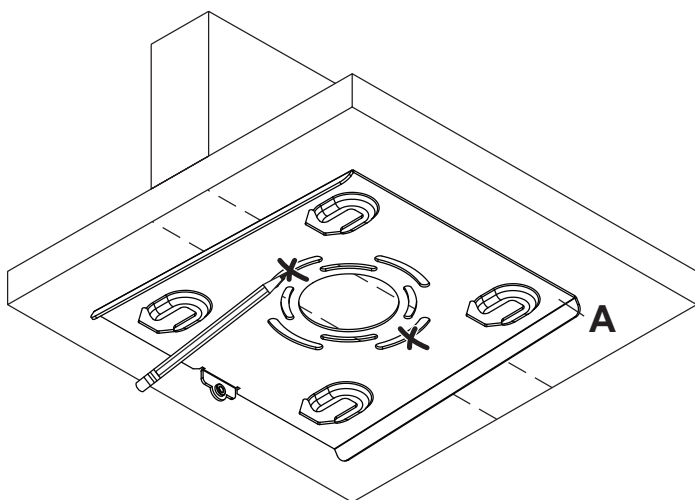

1a-3



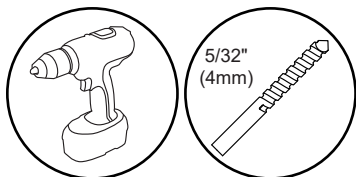


ENG Drill mounting holes into supporting surface (2.5" (64mm) minimum depth required).

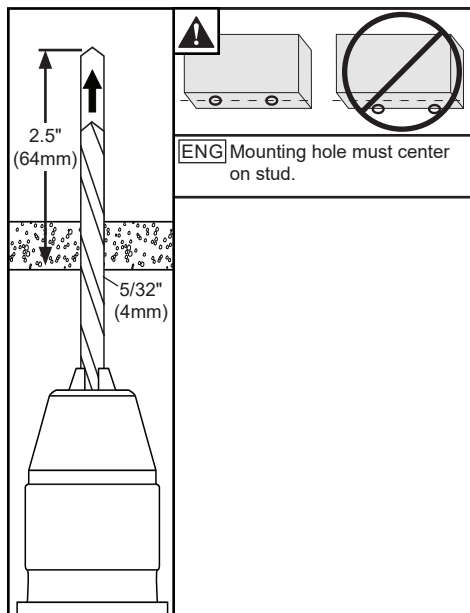

1a-4

ENG Install using wood screws provided.

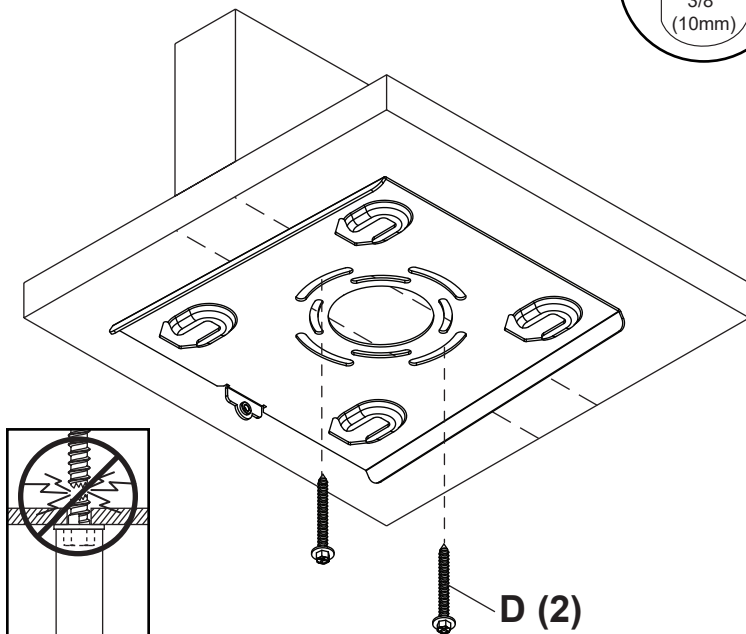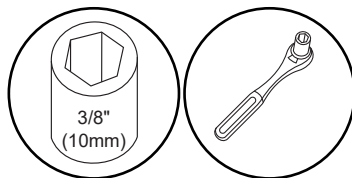

ENG Maximum 80 in. • lb (9 N.M.).





1b

▲ WARNING

ENG - When installing Peerless ceiling mounts on a concrete ceiling, the ceiling must be at least 8" thick with a minimum compressive strength of 2000 psi. Never attach concrete expansion anchors to concrete covered with plaster, drywall, or other finishing material.



1b-1

ENG Mark mounting holes.

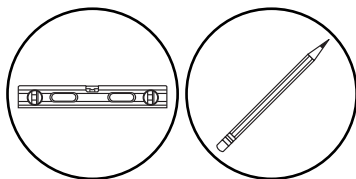
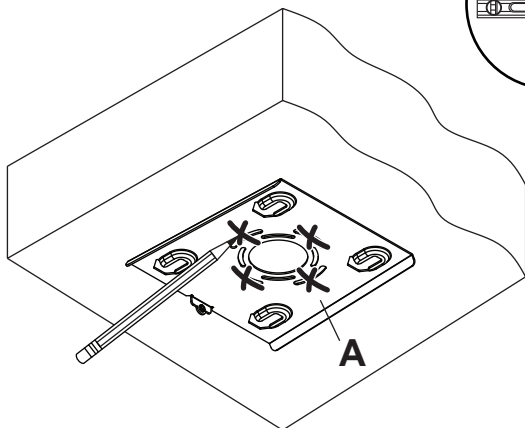


1b-2


ENG Drill mounting holes into supporting surface (2.5" (64mm) minimum depth required).

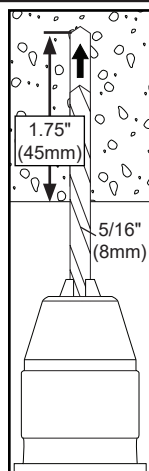

1b-3

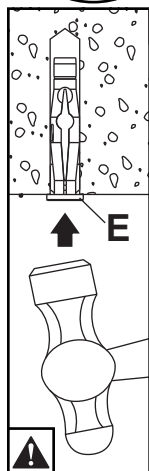





ENG Insert anchor flush to concrete.

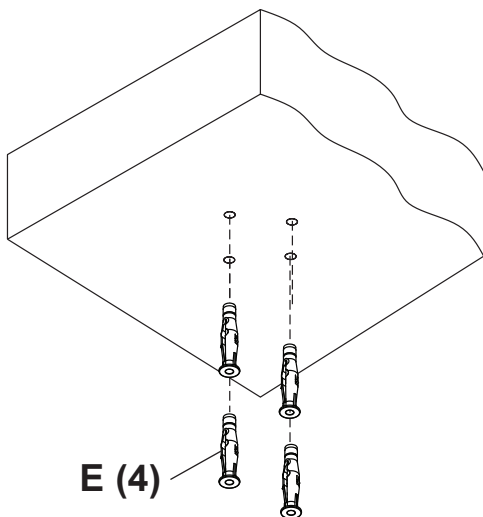

1b-4

ENG Install using concrete anchors and wood screws provided.

ENG Maximum 80 in-lb (9 Nm).

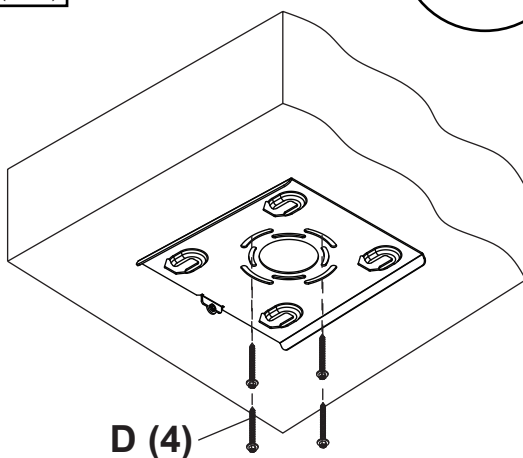




1c

⚠ WARNING




ENG - When installing Peerless ceiling mounts on a wood joist/beam covered with plywood, verify that the wood joist/beam are a minimum of 2" x 4" nominal size and plywood is a minimum Grade BC, 1/2" (13mm) thick. Plywood may be covered by gypsum board (drywall) up to 5/8" thick.

1c-1

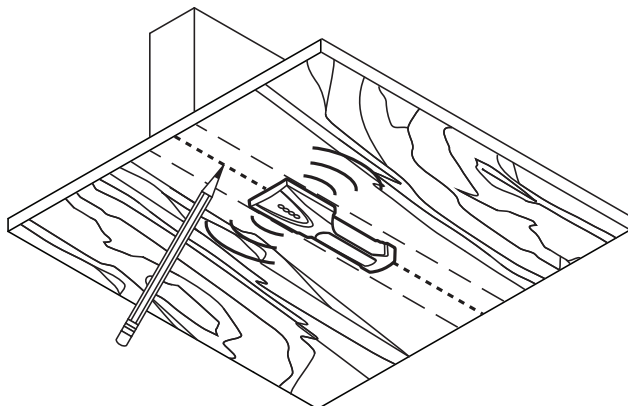


1c-2


ENG Mark mounting holes on plywood.

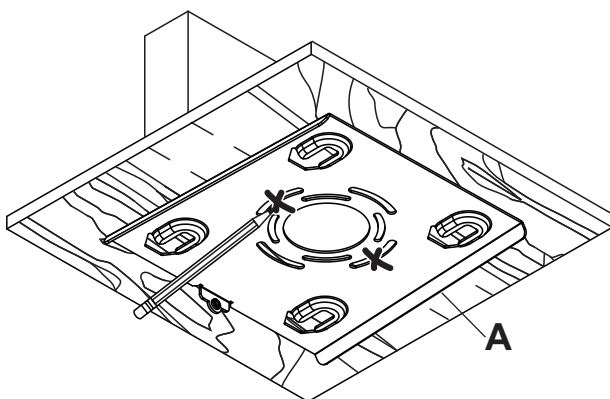

1c-3

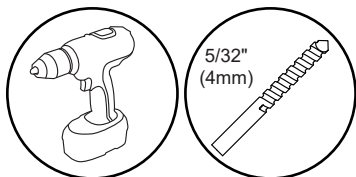




ENG Drill mounting holes into supporting surface (2.5" (64mm) minimum depth required).

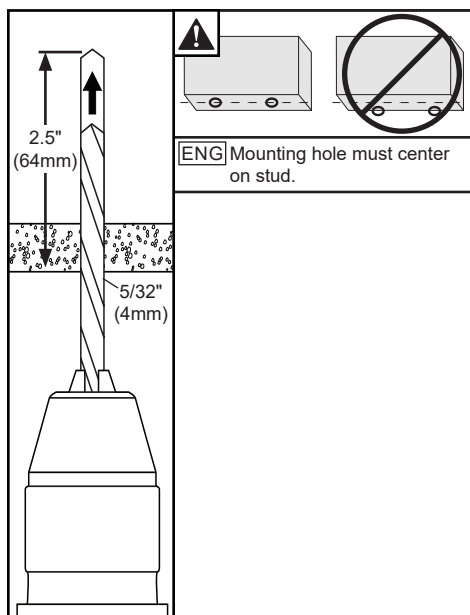

1c-4

ENG Install using wood screws provided.

ENG Maximum 80 in-lb (9 Nm).

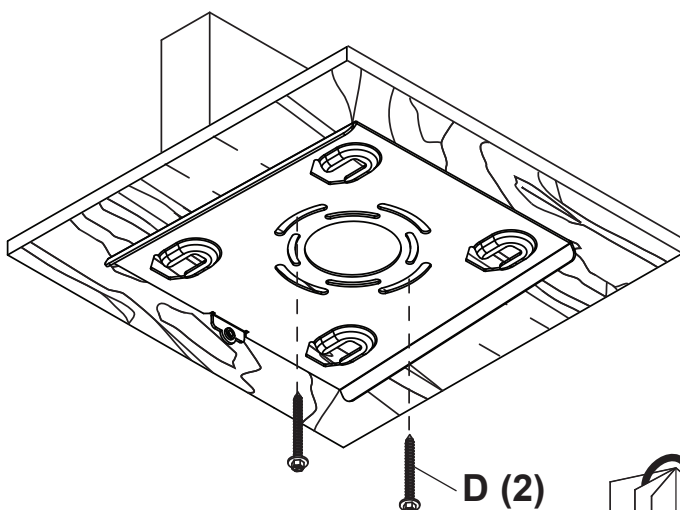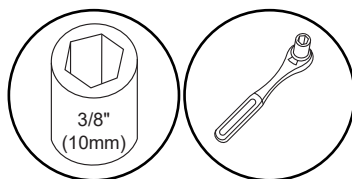




1d

⚠ WARNING


ENG - When installing Peerless ceiling mounts on a wood joist/beam, verify that the wood joist/beams are a minimum of 2" x 4" nominal size.

1d-1




ENG Mark mounting holes.

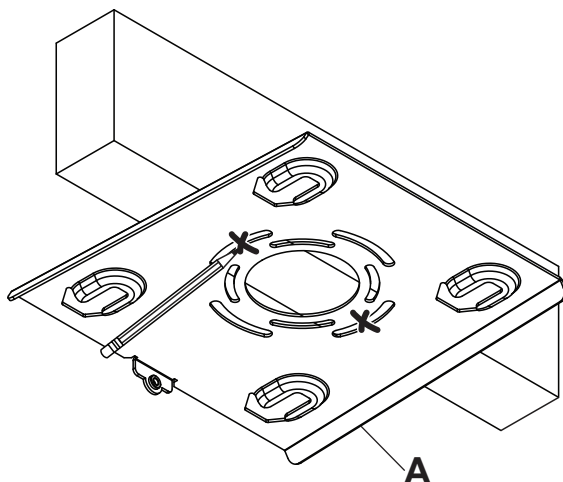

1d-2







ENG Drill mounting holes into supporting surface (2.5" (64mm) minimum depth required).

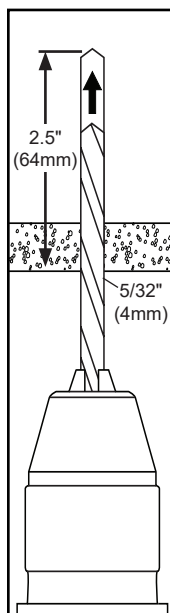

ENG Mounting hole must center on stud.

1d-3

ENG Install using wood screws provided.

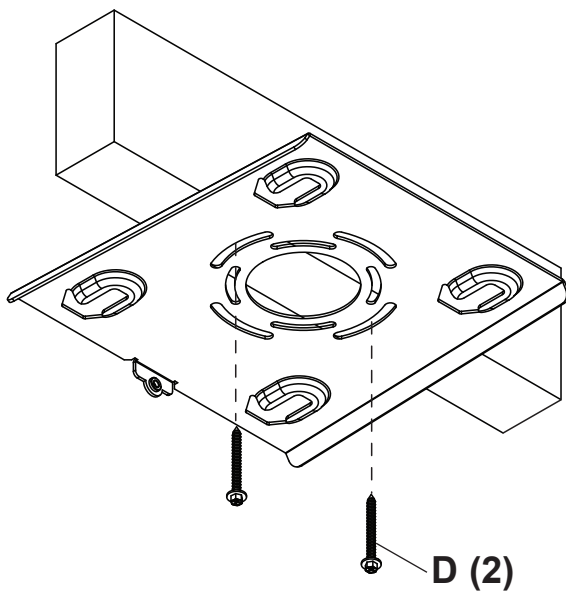

ENG Maximum 80 in. • lb (9 N.M.).





1e


⚠ WARNING

ENG - When installing Peerless ceiling mounts on a wood joist/beam, verify that the joists/beams are a minimum of 2" x 4" nominal size. Do not install over gypsum board thicker than 5/8".

1e-1





1/2"
(13mm)
MIN

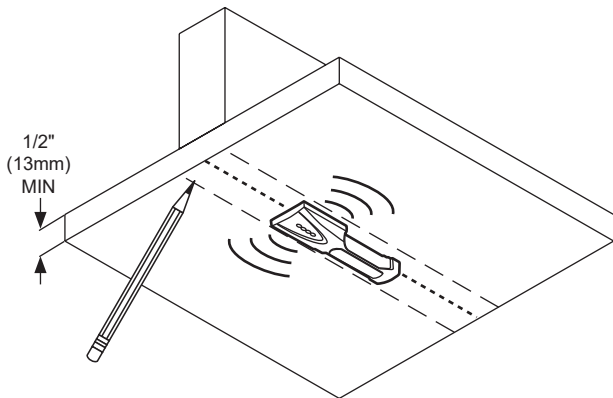

1e-2






ENG Drill mounting holes into supporting surface (2.5" (64mm) minimum depth required).

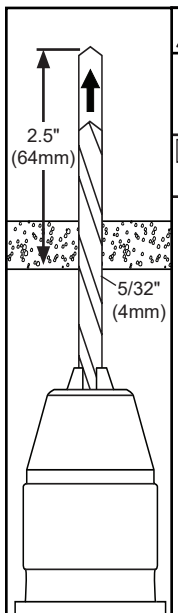

1e-3



ENG Mark mounting holes on stud center lines.

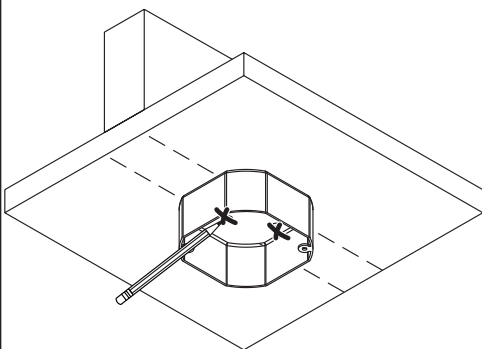

1e-4

⚠ WARNING


ENG - Length of wood screw must be at least #10 x 1-1/4" plus the thickness of the drywall.

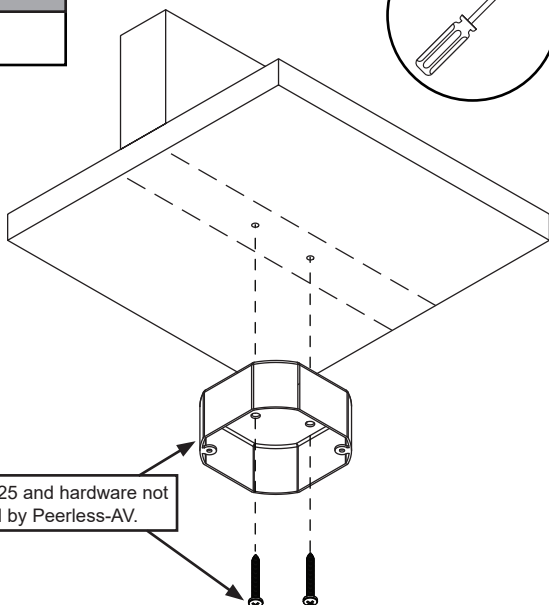



1e-5

ENG RACO125 and hardware not supplied by Peerless-AV.


MAX
LB/KG
20 lb
(9 kg)

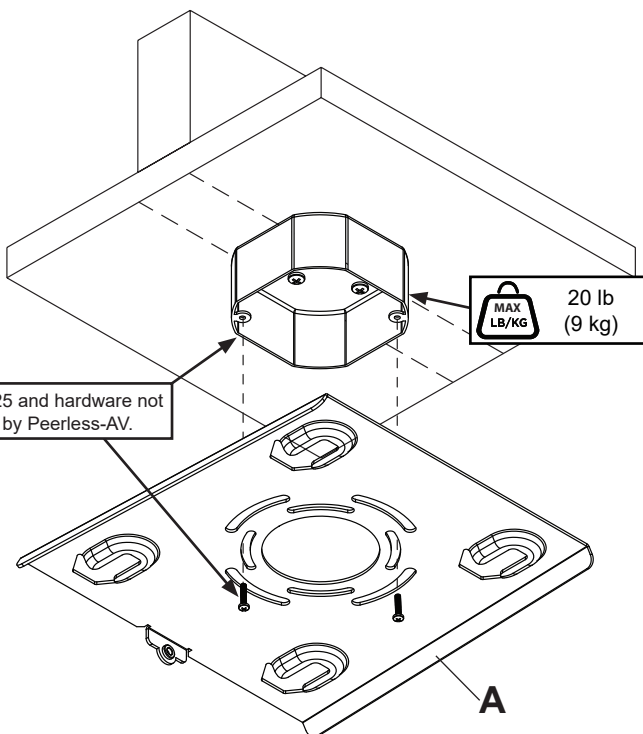


ENG This page intentionally left blank.

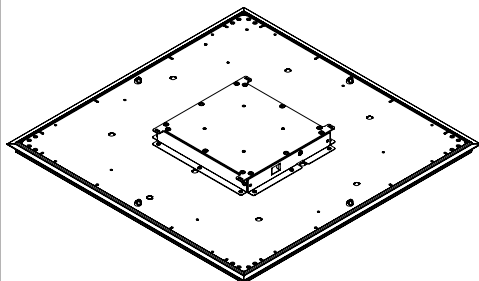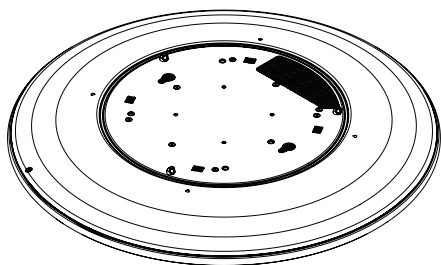


2a-1

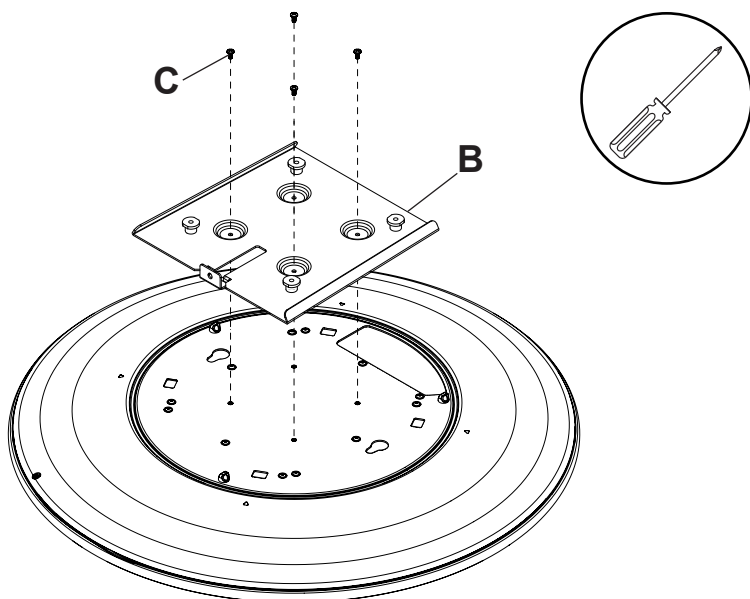

2a-2

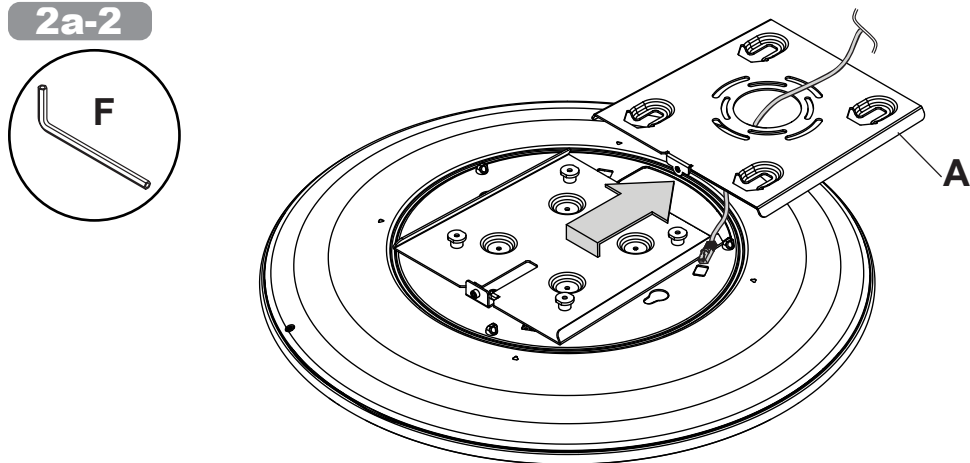


ENG Position top mounting posts to ceiling plate first. Then position bottom mounting posts and slide forward.

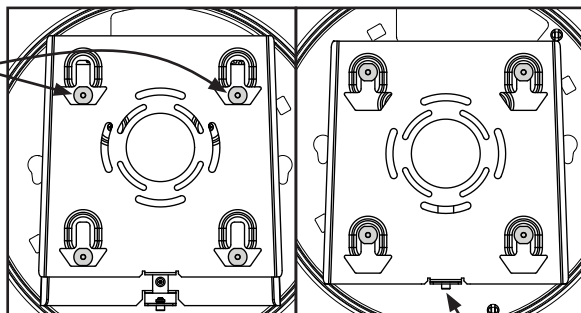


ENG Tighten.


2b-1

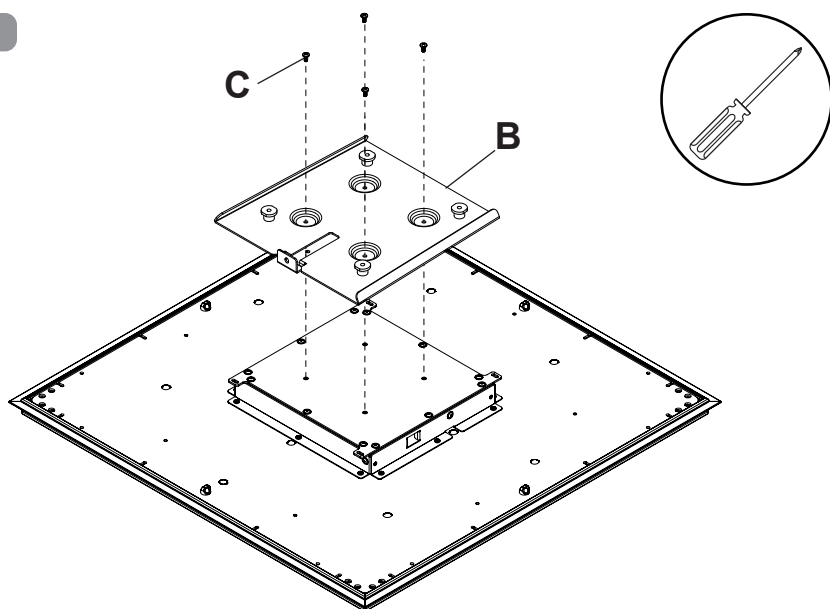

2b-2

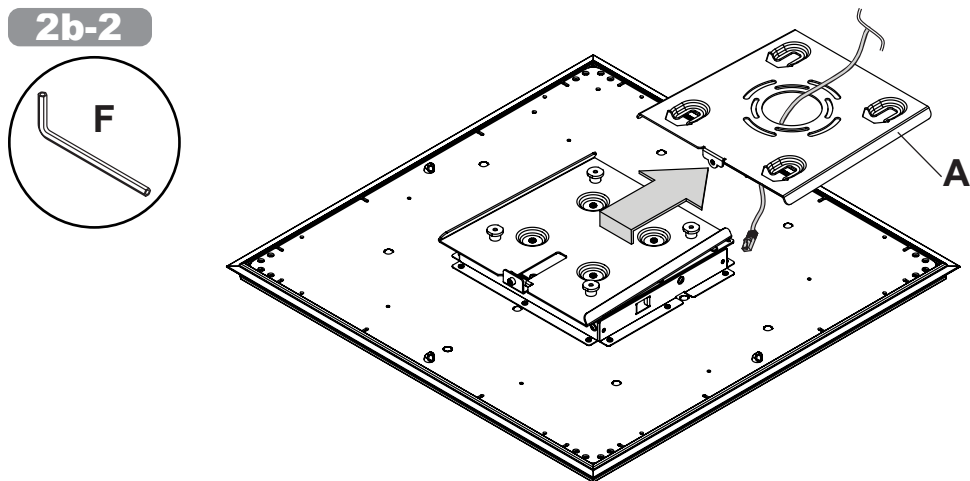

ENG Position top mounting posts to ceiling plate first. Then position bottom mounting posts and slide forward.

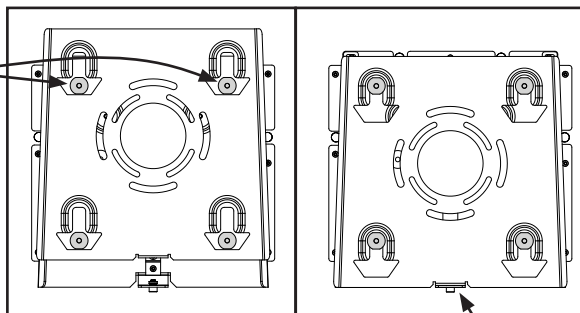

ENG Tighten.

ENG	Warranty	ESP	Garantía	FRN	Garantie	DEU	Garantie	ITL	Garanzia
POR	Garantia	RUS	Гарантия	JPN	保証	KOR	보증서	CHI	保证

www.peerless-av.com/warranty



**United States, Canada,
Latin America, Caribbean:**

Shure Incorporated
5800 West Touhy Avenue
Niles, IL 60714-4608 USA

Phone: 847-600-2000
Fax: 847-600-1212 (USA)
Fax: 847-600-6446
Email: info@shure.com

Europe, Middle East, Africa:

EU Importer / EU Rep.
Shure Europe GmbH
Jakob-Dieffenbacher-St. 12,
75031 Eppingen, Germany

Phone: +49-7262-92490
Fax: +49-7262-9249114
Email: info@shure.de

UK Importer / UK Rep.

Shure UK Limited
Unit 2, The IO Centre, Lea Road,
Waltham Abbey, Essex, EN9 1AS,
UK

Asia, Pacific:

Shure Asia Limited
22/F, 625 King's Road
North Point, Island East
Hong Kong

Phone: 852-2893-4290
Fax: 852-2893-4055
Email: info@shure.com.hk

ENG Shure Incorporated declares that this product with CE Marking has been determined to be in compliance with European Union requirements. The full text of the EU declaration of conformity is available at the following site: <https://www.shure.com/en-EU/support/declarations-of-conformity>.
Shure Incorporated declares that this product with UKCA Marking has been determined to be in compliance with UK requirements. The full text of the UK declaration of conformity is available at the following site: <https://www.shure.com/en-GB/support/declarations-of-conformity>.