



# YONGNUO YN360IV RGB Led Video Light Lamp User Manual

[Home](#) » [YONGNUO](#) » YONGNUO YN360IV RGB Led Video Light Lamp User Manual 

## Contents

- 1 YONGNUO YN360IV RGB Led Video Light Lamp
- 2 Introduction
- 3 Precautions
- 4 Product specification
- 5 Product structure
- 6 Remote Control Structure
- 7 Reflector Structure
- 8 Remote Control Installment
- 9 Two power supply modes
- 10 Power ON or OFF
- 11 Standard Mode
- 12 Documents / Resources
- 13 Related Posts



YONGNUO YN360IV RGB Led Video Light Lamp




## Introduction

Thank you for using YN360Lv. Please read the user manual carefully before use,thank you.

## Precautions

Do not put the product close to or throw it into the fire source to avoid the danger of fire and explosion. Do not disassemble the product, maintenance or repair of this product should be handled by technical maintenance personal of our company or authorized technical maintehance personal. When the product is running, please do not look directly at the COB lamp beads, do not cover the heat emission hole, and do not touch the COB lamp beads; When the device is running, do not look directly at the light. Do not use this product in flammable and explosive place,or where it can be exposed to moisture.

## Product specification

Light Source	400pcs lamp beads + 80pcs SMD lamp beads		
Color temperature version	2000K~10000K and full color RGB		
Output power	24W		
Illumination Distance	0.3M	0.5M	1M
5600K	11710Lux	6494Lux	2295Lux
R	2580Lux	1124Lux	355Lux
G	4361Lux	2140Lux	655Lux
B	1112Lux	534Lux	169Lux
Product Net Weight	Approx800g		
Compatible batteries	One NP-F series batteries ( Need to be purchased separately. )		
External power source	DC12V2A、Interface sizeΦ5.5*2.1mm 		
Product Net Size	57*6*9.5CM	Package Dimensiosns	65*15*11CM
Control distance	≤15M	2.4G wireless control	≤15M
Average Service Life	50000H	Remote Control Battery	CR2032/3V
Luminance Angle	55°and110°		
Contents:Video ligh(1),Remote Control(1), Storage bag(1), User Manua(1).			
Note:Please contact your dealer if anything missing.			

## Product structure



## Remote Control Structure



## Reflector Structure

1、Reflector Installment. (Optional Reflector)  
Use M4 screw to screw into the upper and lower ends of nut interfaces to install the reflector.



## Remote Control Installment

Please pull out the battery insulation gasket of the remote control for the first use. Installment: Follow the arrow direction to install the remote control. The screen will be automatically turned off after 1min no-operation.

Removal: Press and hold the remote control lock buckle to remove it in the opposite direction of the arrow. The screen will be automatically turned off after 15s no-operation.



## Two power supply modes


1. Uses battery for power supply. Installment: Follow the arrow direction to install the NP-F series battery.

**Removal:** Press the battery lock buckle to remove the battery in the opposite direction of the arrow.




The standard version does not contain NP-F series batteries.

2. Powered by power adapter.

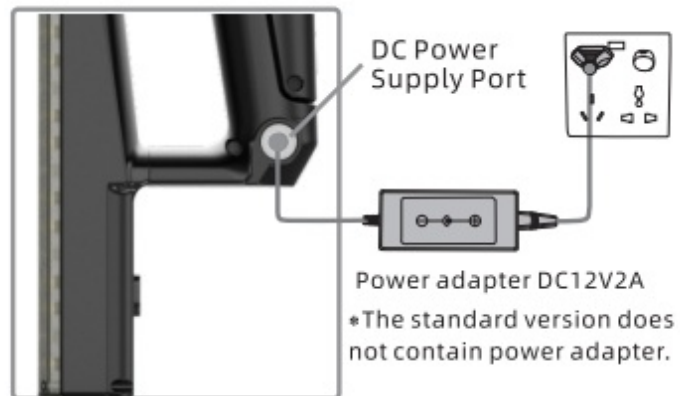


## Power ON or OFF

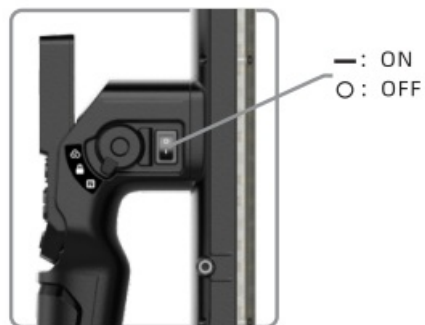

## Standard Mode

### (1). Color Temperature Setting.

Toggle the dial plate to standard mode

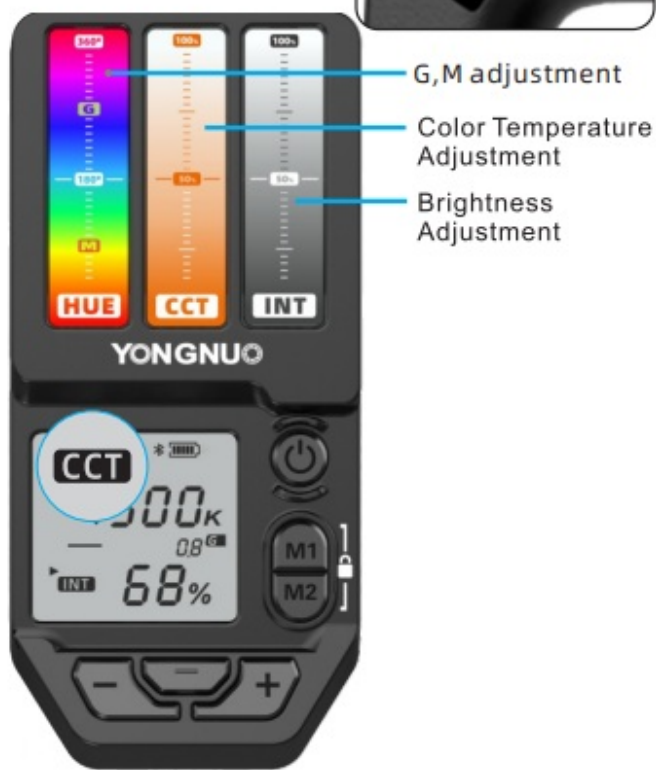


G,M adjustment

Color Temperature Adjustment

Brightness Adjustment

- Tone Setting.
- Effects Setting.

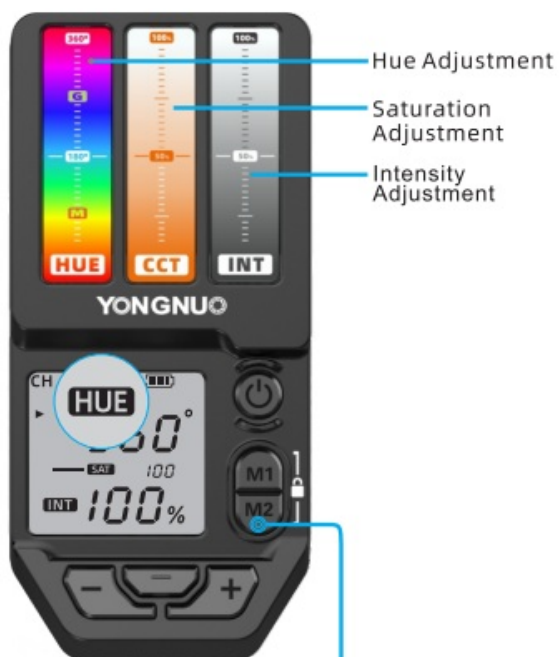


Hue Adjustment

Saturation Adjustment

Intensity Adjustment

In [CCT] interface, press <M2> to enter [HUE].

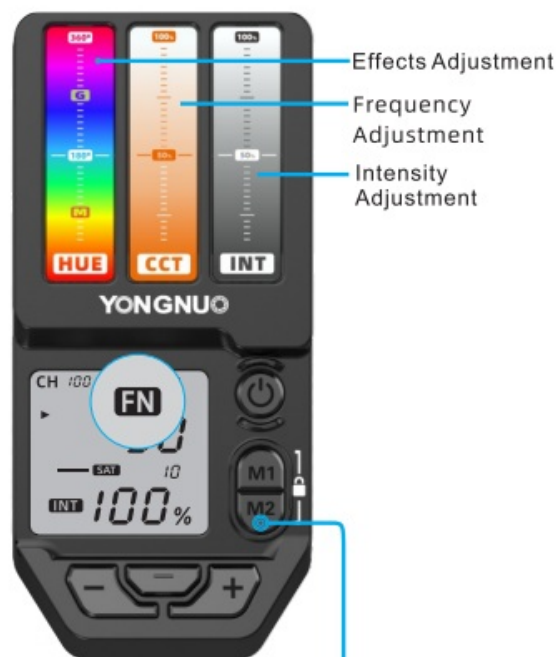

Effects Adjustment

Frequency Adjustment


Intensity Adjustment

In [HUE] the interface, press <M2> to enter [FN]; press <M2> again to return to [CCT].




#### • Channel Setting.

Press <M1> to enter menu, choose <CH> channel, press <OK>, adjust channel, press <OK> to finish setting, press <M1> again to return.

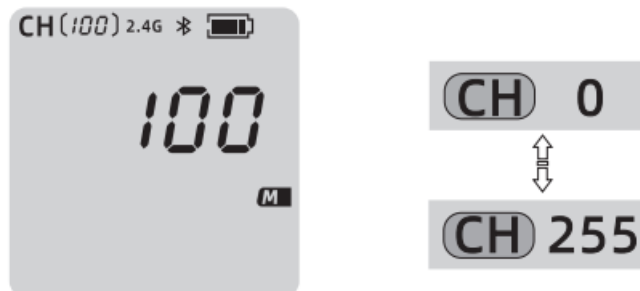

#### • 4 professional light adjustment curve models.


Press <M1> to enter menu, press > and adjust until twinkles, press “OK” to stop twinkling, adjust the key to choose the curve made

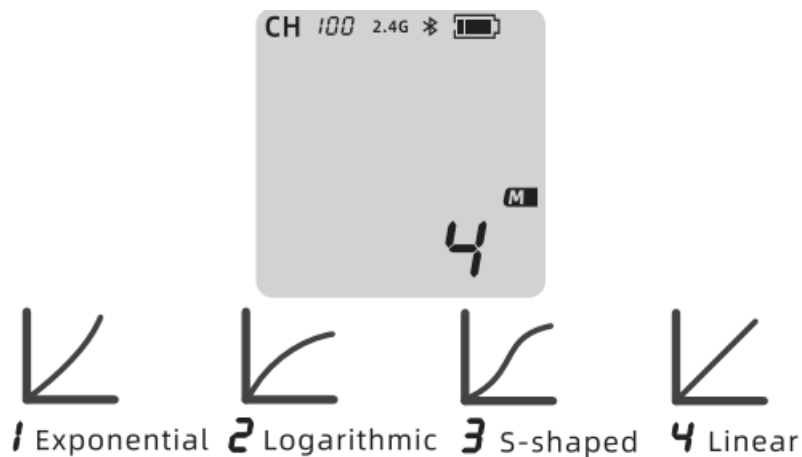




### Light Lock Mode


Turn on light lock mode, the remote control and APP are locked simultaneously and non-operational.

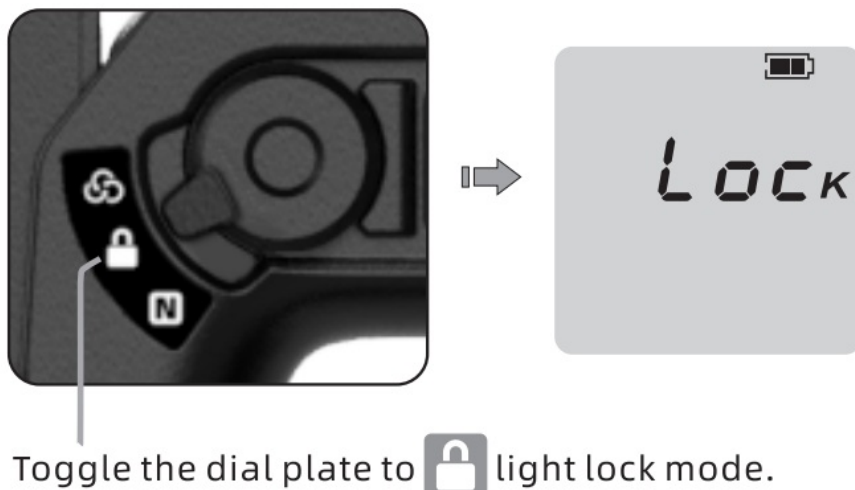

Toggle the dial plate to  light lock mode.

### Multiple Lights Layout Mode


Please download APP for using layout mode.

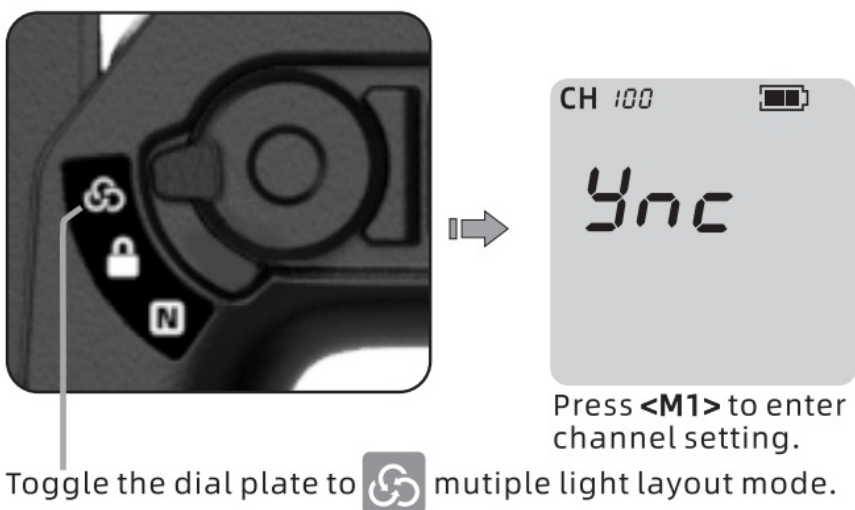

Toggle the dial plate to  multiple light layout mode.

### The Use of APP and Remote Control

1. Press <M1> to enter menu, choose bluetooth <, press <OK> to turn or off the bluetooth. then open the APP to connect automatically.
2. 2.4G wireless mode can be turned on or off.
3. Visit YONGNUO official website or scan the APP QR code in the manual to download.

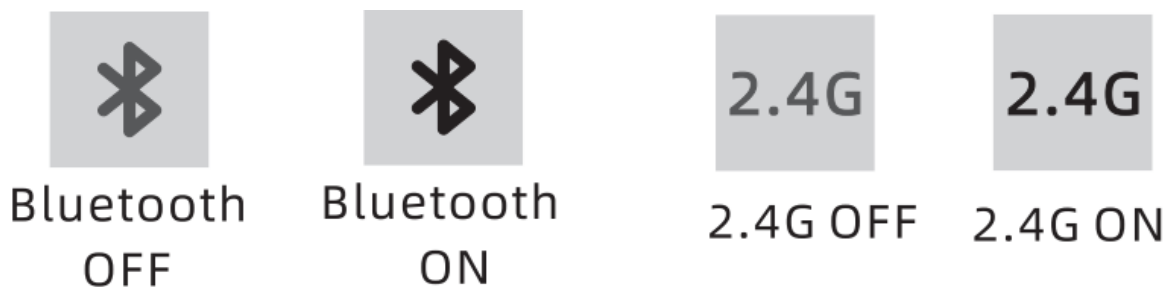

The functions in this manual are based on the test conditions our company. Further notice will not be given if the design and specifications change.




APP Download



YONGNUO Web



## Documents / Resources



[YONGNUO YN360IV RGB Led Video Light Lamp](#) [pdf] User Manual  
YN360IV RGB Led Video Light Lamp, YN360IV, RGB Led Video Light Lamp, Video Light  
Lamp, Light Lamp, Lamp

[Manuals+](#)