

YRYG 16.2 LED Large Screen Clock Instruction Manual

[Home](#) » [YRYG](#) » YRYG 16.2 LED Large Screen Clock Instruction Manual 

TRYG




LED LARGE SCREEN CLOCK
Infrared Remote Control

Contents

- 1 Product Usage Instructions
- 2 Function Overview
- 3 Product Installation
- 4 Remote Control Bution Operation Instructions
- 5 Documents / Resources
 - 5.1 References
- 6 Related Posts

Product Usage Instructions

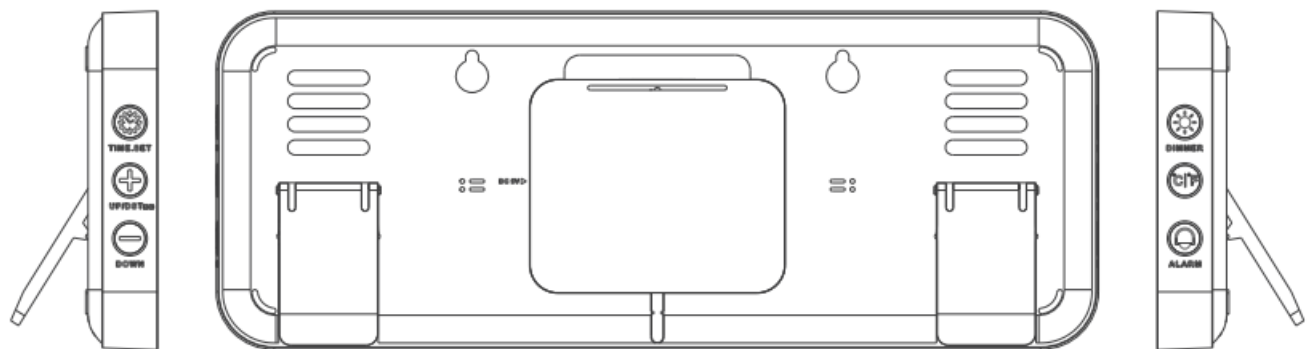


Packing List: A Main Unit, A Power Cord, A Remote Control One Button Batteries, A Manual.

Function Overview

Infrared Remote Control Dual Alarm Clocks Memory Function 12/24 Hour Format	HD LED Display (Countdown) Timer 10 Levels of LED Brightness Calendar Temperature Display Night Mode
--	---

Product Installation

1. Open the large cover on the back of the product, rotate and open the button battery cover in the direction indicated by the arrow icon.
Install the 2032 button battery into the battery slot according to the “positive pole (+) facing upward, and cover the battery door in the direction shown.

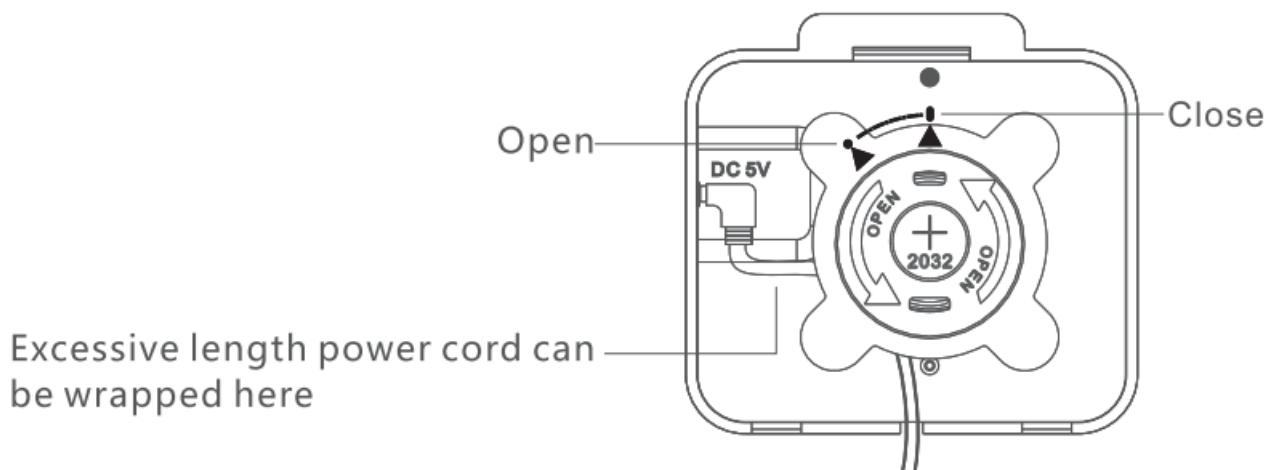

2. Insert the round DC plug of the power cord into the DC 5V jack (inside the big cover on the back), and the USB plug into the USB 5V power supply.
3. Take out the 2025 button battery and put it into the battery compartment of the remote control; tear out the protective film on the surface of the display panel.

General Button Operation

Time and Date Setting **TIME.SET**

In the time display mode, press and hold “TIME SET” button for 3 seconds to enter the daylight saving time setting.

Short press “+” or “-” button to turn on or off the daylight saving time function.

Press “TIME SET” button again to set the 12/24 hour format, press “+” or “-” button to switch.

Press “TIME SET” button again to enter the time setting.

The “HOUR” flashes, press “+” or “-” to adjust the hour, then press “TIME SET” to enter the minute setting, “MINUTE” flashes, press “+” or “-” to adjust the minute.

Press “TIME SET” button again to enter the year setting, “YEAR” flashes, press “+” or “-” to adjust the year.


Press “TIME SET” button again to enter the month setting, “MONTH” flashes, press “+” or “-” to adjust the month.

Press “TIME SET” button again to enter the date setting, “DAY” flashes, press “+” or “-” to adjust the date.

Press “TIME SET” button again to return to the time display.

Note: Before setting the time, please pay attention to whether AM/PM setting is correct, AM/PM will be displayed in 12-hour format, but not in 24-hour format.

Brightness Adjustment **DIMMER**


In the time display mode, short press “” button to adjust the brightness of the clock display. (10 levels of brightness adjustment, the last one is the screen off).

Celsius / Fahrenheit Switch –

Press “-” to switch between Celsius °C / Fahrenheit °F in the time display.

| **Alarm Setting**

In the time display mode :

1. Press and hold “ALARM1* button (icon ) for 3 seconds to enter the alarm 1 setting. Then “HOUR” starts flashing, press “+” or “-” button to adjust the hour;

Press the “ALARM1” button again to enter the minute setting,

Then “MINUTE” starts flashing, press “+” or “-” button to adjust the minute.

2. Press the “ALARM1” button (icon ①) again to enter the alarm mode setting.

Press “+” or “-” button to select the alarm mode

1-5 for Double day off mode, Ring Monday to Friday

1-6 for Single day off mode, Ring Monday to Saturday

1-7 for Daily mode, Ring every day


3. Press “ALARM1” button (icon ①) again to exit the setting and return to the time display.

Note: Alarm 2 (icon ②) setting is the same as alarm 1 setting (icon ①).

Short press Alarm1 (icon ①) /Alarm2 (icon ②) button to turn on or off the alarm.

Night Mode Setting DIMMER

In the time display mode


1. Press andhold “DIMMER” button (icon- ) for 3 seconds to enter the night mode setting.

Press “+” or “-” button to turn on or off the night mode at this time.

Press “DIMMER” button again to exit the setting to return to the time display When night mode is on, the display brightness will be high (07:00-18:59), medium (18:59-22:59), low (23:00-06:59) , and the cycle will be daily.

Note: When night mode is on, you can manually adjust the brightness of arbitrary interval of high/medium/low level to the appropriate status, and the clock will automatically memorize this as the default brightness

Remote Control Button Operation Instructions

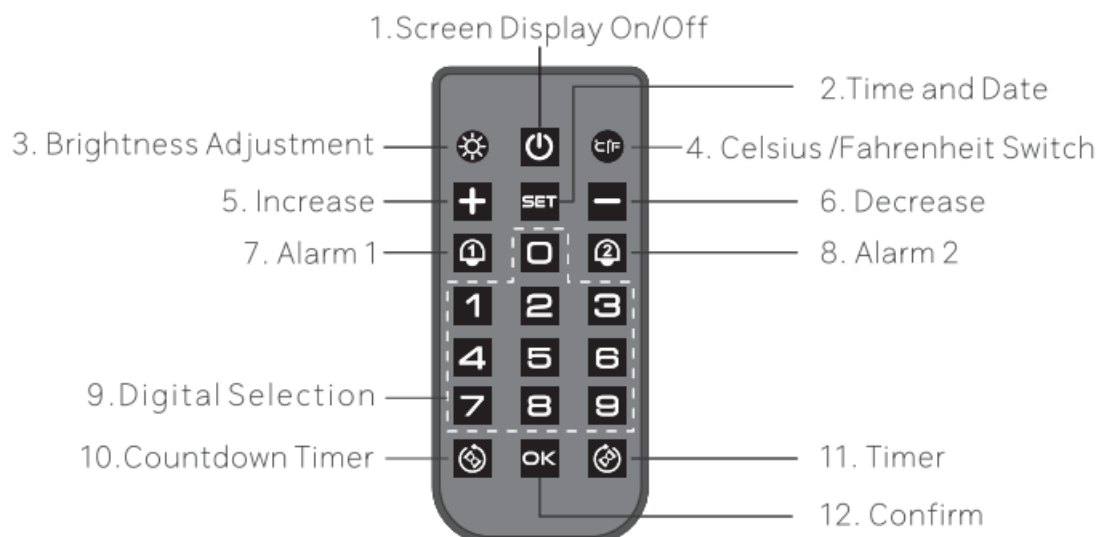

Warm tip: When using the remote control to operate the product, the remote control must be facing the product, and the remote control distance should be kept within 4 meters

Warm tip: When using the remote control to operate the product, the remote control must be facing the product, and the remote control distance should be kept within 4 meters.

Screen Display On/Off Button 

Short press to turn the screen display on or off.



SET Button **SET**

Short press 'SET' button to set the time and date with "+" or "-".

The specific operation sequence is the same as the clock key version of time and

date setting  TIME.SET."

Brightness Adjustment Button


In the time display mode, short press "" button to adjust the brightness of the clock display; long press *  * button to turn on/off the night mode with * + * or "==" . (Manual adjustment has 10 levels of brightness, the last one is the screen off).

Celsius / Fahrenheit Switch

In the time display mode, press briefly to switch between Celsius °C / Fahrenheit °F .

Alarm 1 Setting Button


In time display mode, press briefly to turn on or off "Alarm 1° ;

Long press to enter alarm 1 setting. The specific operation is the same as the button " " (Note: you can also directly press the number button to set)

Alarm 2 Setting Button

The alarm 2 setting is the same as alarm 1


Countdown Timer

In the time display mode, press "" button to enter the countdown timer interface 00:00:00". Then input the desired duration (e.g. 15 minutes and 25 seconds), i.e. press 1-5-2-5 in sequence. Then press "OK" button to start the countdown.


(Up to 99:59:59)

In the process of timing, press "OK" button to pause /start the countdown.


In the pause state, press and hold "OK" button to zero out.

After the countdown time reaches "00:00:00", there will be a 2-minute alarm reminder. Press and hold " " button for 3 seconds to exit the countdown timer and return to time display mode.

Timer

In the time display mode, press "" button to enter the timing interface '00:00:00", then press "OK * button to start timing.

In the process of timing, short press "OK" key to pause/start the timing.

In the pause state, press and hold the "OK" button to zero out Press and hold " " for 3 seconds to exit the timing and return to time display mode.

Additional Functions +

The digits "SECOND" flashing and not flashing switch:

In the time display mode, long press "+" button of the clock /remote control for three seconds to switch "SECOND" flashing or not flashing.

Documents / Resources



[YRYG 16.2 LED Large Screen Clock](#) [pdf] Instruction Manual

16.2 LED Large Screen Clock, 16.2, LED Large Screen Clock, Large Screen Clock, Screen Clock, Clock

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)