



ZEBRONICS Smart LED Projector User Manual

[Home](#) » [ZEBRONICS](#) » ZEBRONICS Smart LED Projector User Manual

Contents [[hide](#)]

- [1 ZEBRONICS Smart LED Projector](#)
- [2 Features](#)
- [3 Specification](#)
- [4 Package Contents](#)
- [5 Product Description](#)
- [6 Remote Control](#)
- [7 Projector Interface](#)
- [8 USB Connections](#)
- [9 HDMI &AV Interface](#)
- [10 Projector distance & size](#)
- [11 Documents / Resources](#)
- [12 Related Posts](#)

ZEBRONICS

ZEBRONICS Smart LED Projector



Dear Customer,

Thank you for purchasing the ZEB-Pixaplay 16 LED Projector. Please read the user manual carefully before usage & save it for future reference.

Note:

- To provide a stable power supply, kindly use the cable provided with the product and connect to an AC 100-240V, 50/60Hz power source.
- Avoid the self-disassembly of the product as it results in the failure of Warranty.
- Avoid looking directly at the projector lens while it is active.
- Make sure that the projector's air vents are not blocked while in use. The device must be kept in a well-ventilated surrounding for proper functioning.
- It is recommended to power OFF the projector after continuous usage of 6 hours.
- Place the projector away from water or other liquids. Avoid water accumulation and ensure good ventilation.
- In case of enquiry regarding the projector, email us at enquiry@zebronics.com or contact us at 044 4000 0004.

Features

- Home Theatre Projectors for Movies, TV & Gaming etc.
- Projector comes with AV IN, AUX OUT, USBx2, HDMIx2
- Built in Speaker
- Wide Compatibility
- Ceiling Mountable
- Remote Control
- Electronics Focus (via remote)
- Miracast
- Dual band Connectivity(2.4GHz & 5GHz)

Specification



- Screen size : 111-508cm
- Native Resolution Max. Supported : 1920 x 1080FHD

- Resolution : 1920 x 1080P (Max)
- RAM : : 1 GB
- Core Processor: Quad Core Processor
- Storage (ROM) : 8 GB
- Android Version: 9.0
- WI-Fi Connectivity: Dual-band Connectivity (2.4GHz & 5GHz)
- Bluetooth Version: vS.1
- Display Technology: LED
- Lifespan : 30,000H
- Brightness: 4000 lumens
- Contrast ratio : 1000:1
- Projection Distance: 1. Sm – 5.6m
- Port Interface :AV IN,AUXOUT, USBx2, HDMIx2
- Video file format :AVI, MP4, MPG, MPEG1, MPEG2, MKV, WMV, VOB, MOV, FLV, H.264
- Input Voltage Product Dimension: AC 100-240V, 50/60Hz
- (WxDxH) :325x240x106 mm
- Net. weight: 2.5 kg


Package Contents

- Projector: 1 Unit
- Remote Control: 1 Unit
- Power Cord: 1 Unit
- AV cable : 1 Unit
- Support Base : 1 Unit
- HDMI Cable : 1 Unit

Product Description

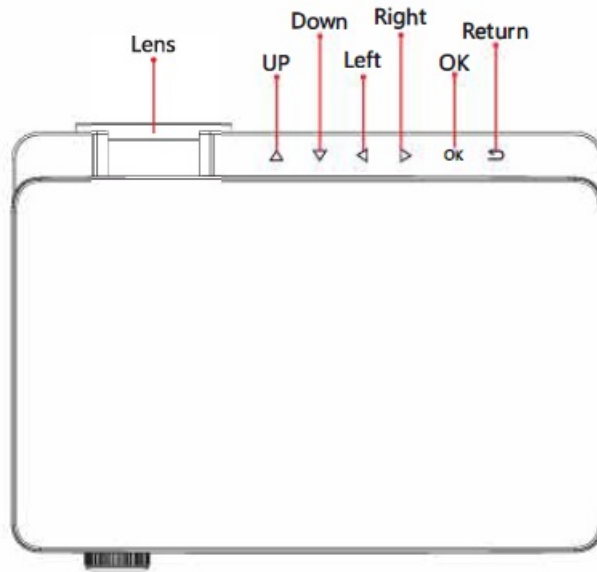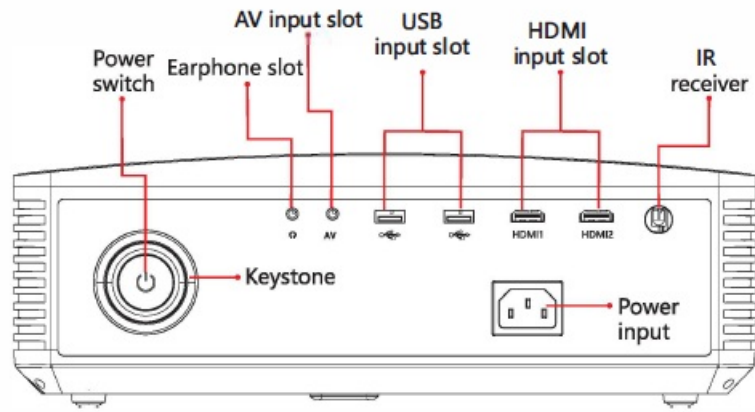



Remote Control

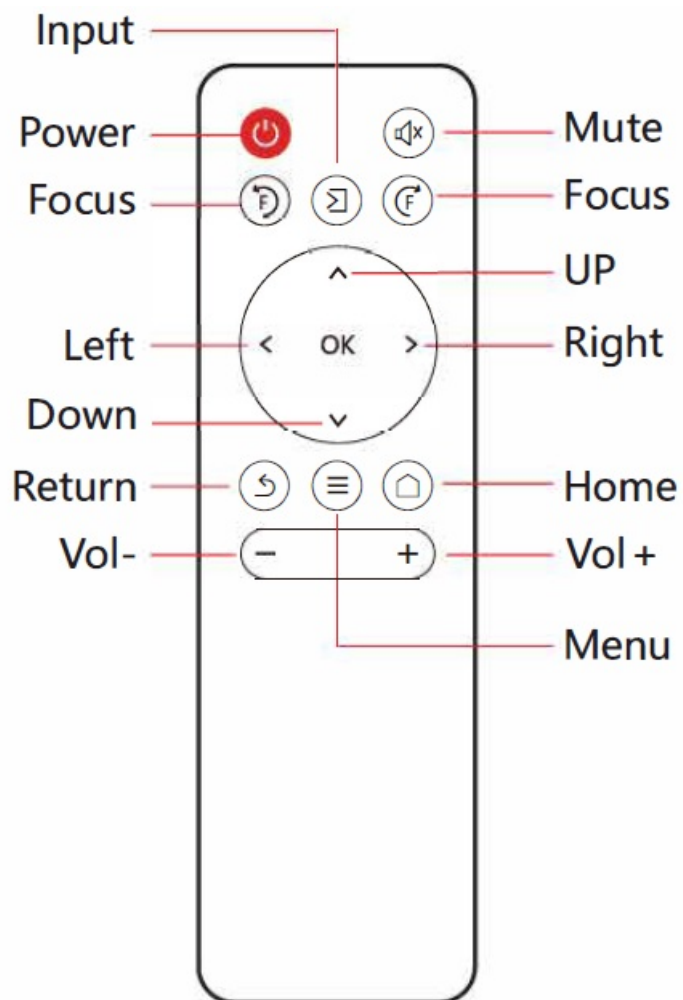

NOTE:


1. To avoid power shortage, please do not mix and use the old and new battery.
2. To avoid battery leakage corrosion, if do not use remote control for a long time, please take the battery out.

Projector Interface

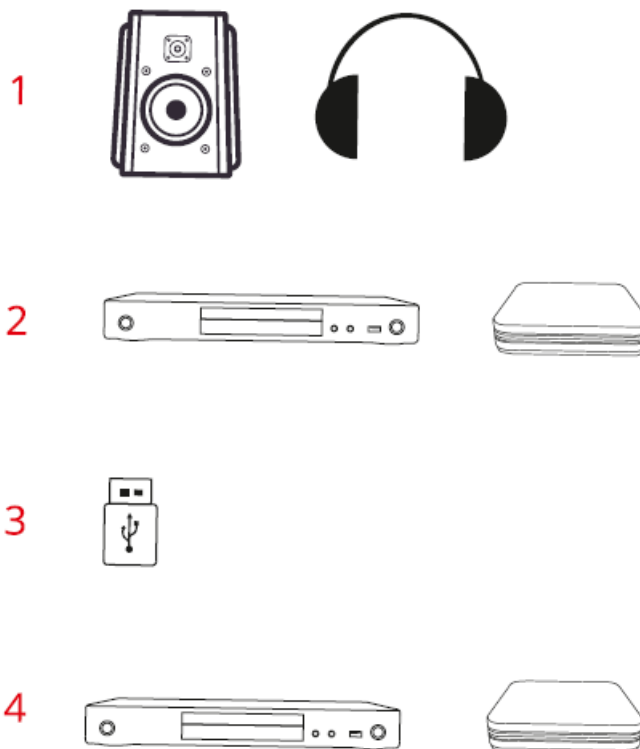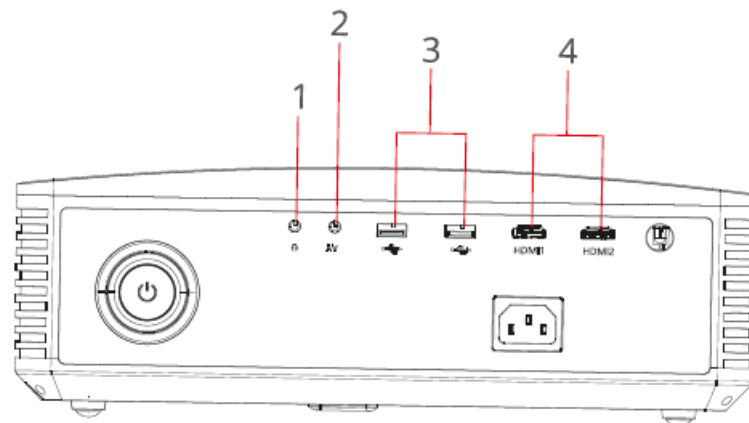

Setting Up the Projector

1. Connect the power cord to the projector and turn it ON, You'll be indicated with the blue color LED on the power button.
2. Before turning ON, make sure to place it in a flat surface for a proper projection then Press the power button / turn it on by using the remote.
3. Align the projector as shown in the image below to ensure proper projection.

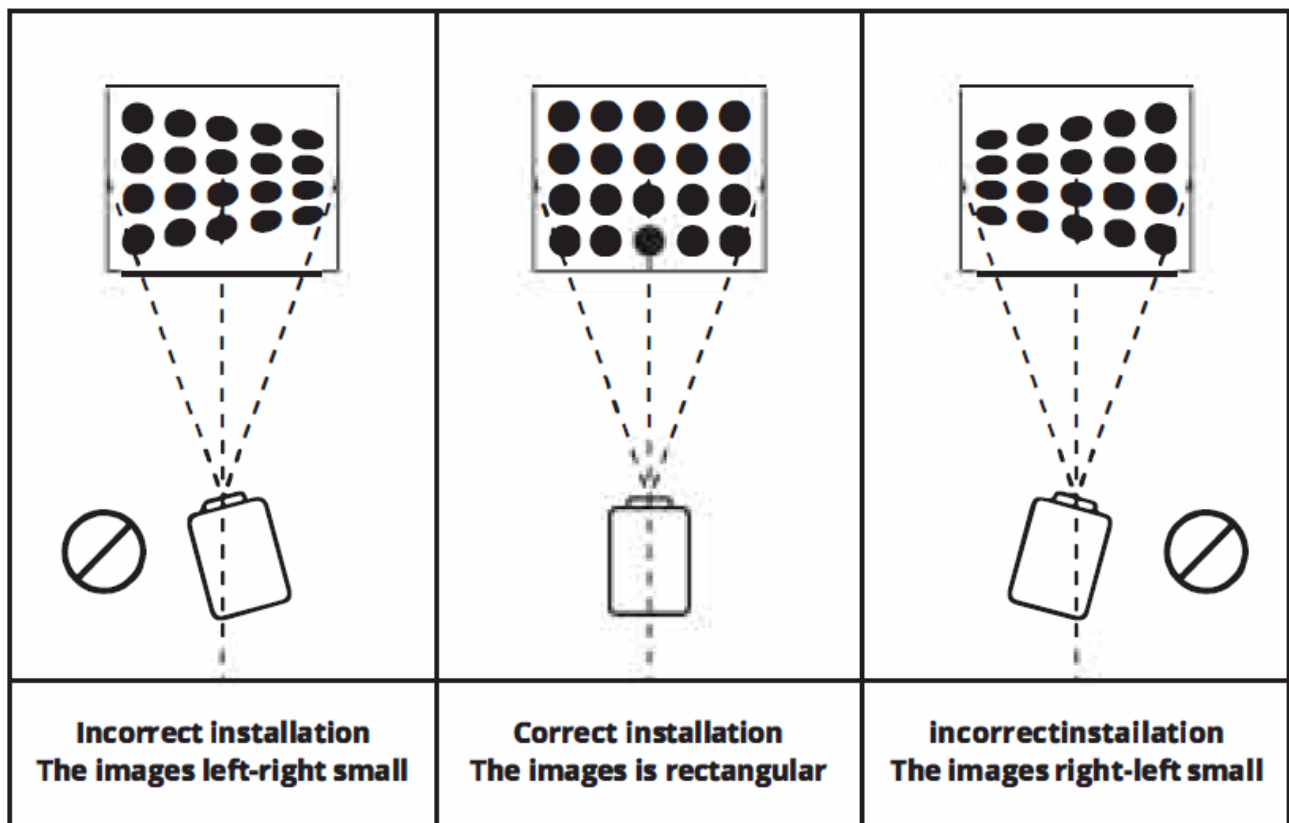

Focus Adjustment


Note: There is no manual focus, it has only an electronic focus. Do not rotate the lens or it will be damaged.



Once the projector turns ON, wait till it gets loaded. Only after a proper boot-up you'll be able to adjust the focus lens using the remote as shown in the image above.


Keystone Adjustment

If the projection of an image/video on either edges are not evenly set, then use the keystone adjustment to correct the image to have even top and Bottom edges. Refer to the image.

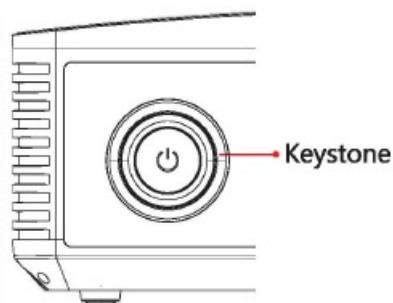


Projection

The projection adjustments like keystone adjustment, Zoom Out can be done using the projection tabs in the settings.

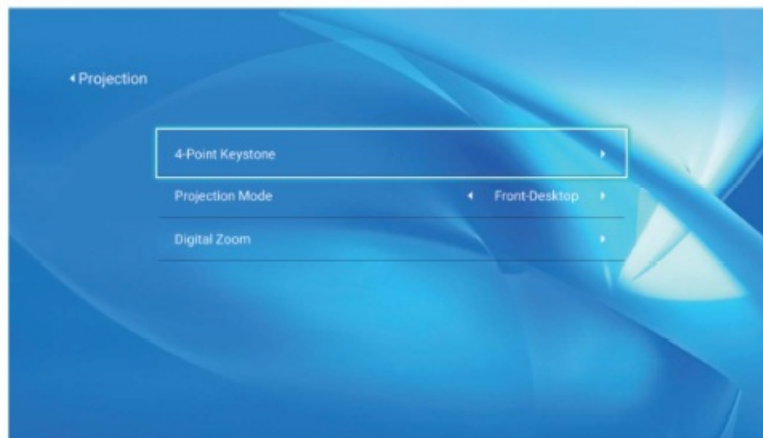


1. Digital 4D Keystone: While most of Projector comes with only Manual Vertical Trapezoid Correction, resulting in blurred corners. PixaPlay 16 have Digital Horizontal as well as Vertical Keystone Correction, giving you sharp & clear corners.
2. Digital Zoom: With a click of Remote, you can Zoom In or Zoom Out the image to perfectly fit within your screen frame.

Android Home

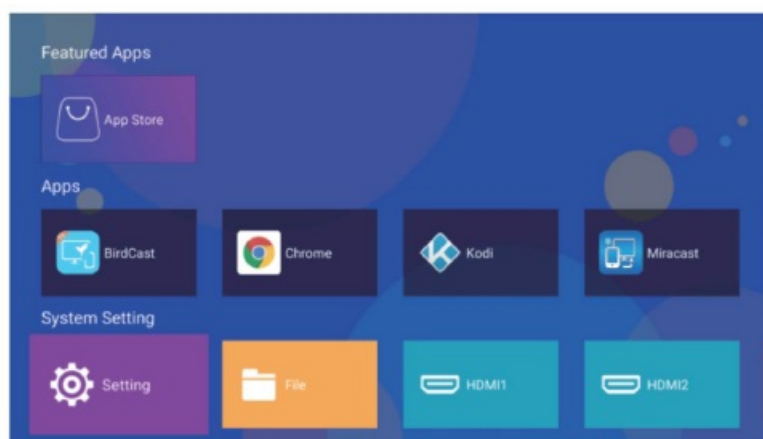



1. Once the projector is turned on you'll be directed to the home screen.
2. Supported external apps can be downloaded from the Google Play store.

Android Settings

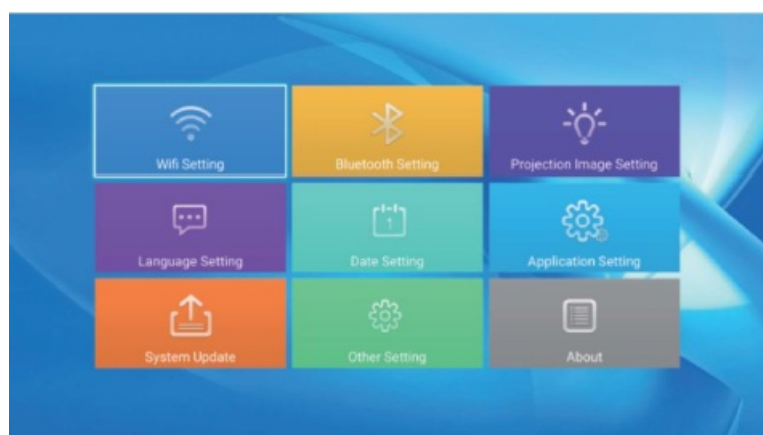



Open the homepage, select settings, you can select network settings, Bluetooth settings, projection settings, language settings, date settings, application management, system update, other settings and you can modify related setting options on this projector.

USB Connections

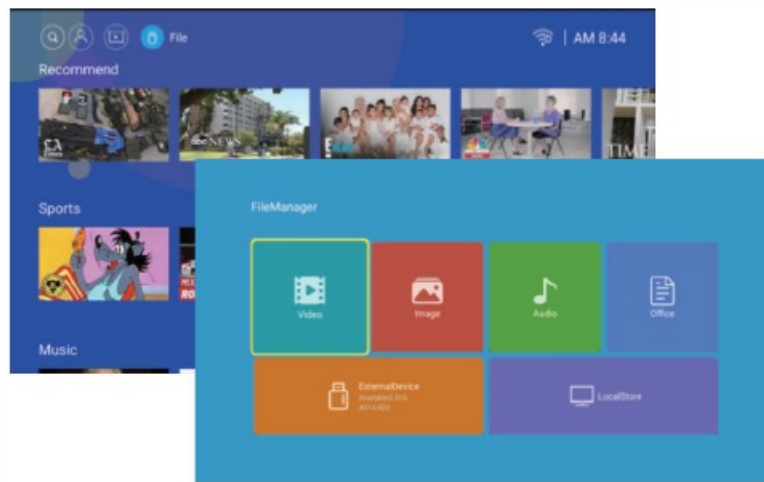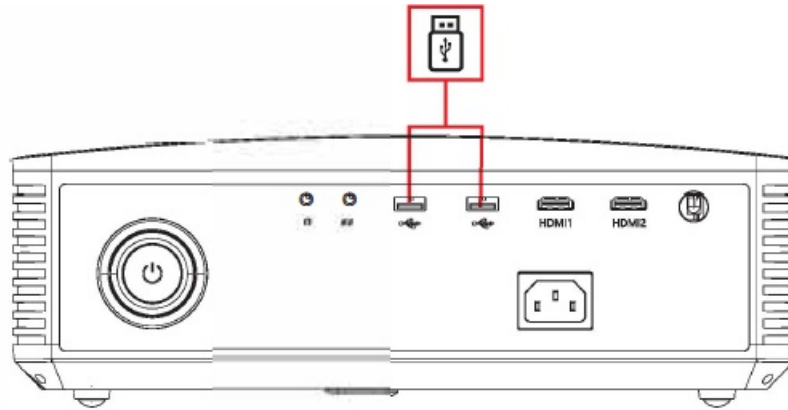


Connect the USB Drive with the content to the projector. You can access the USB drive by either clicking on the USB icon that pops up on the home page or by using the file menu next to the setting icon. The above-mentioned screen will pop-up. You can easily access the media either category-wise -videos | photos or from the folder itself and play them.

HDMI & AV Interface

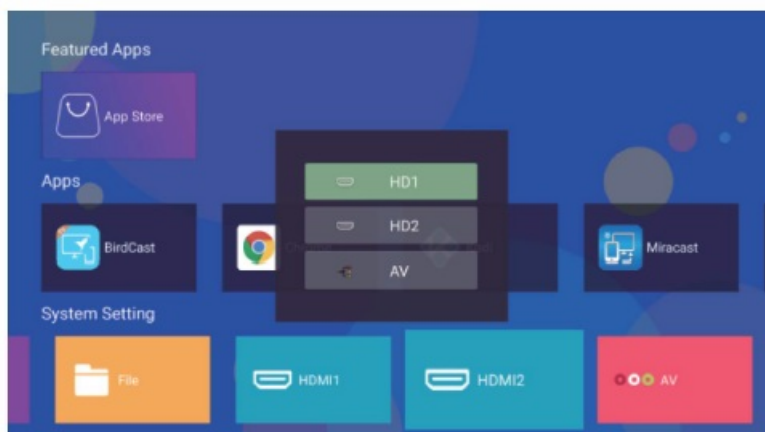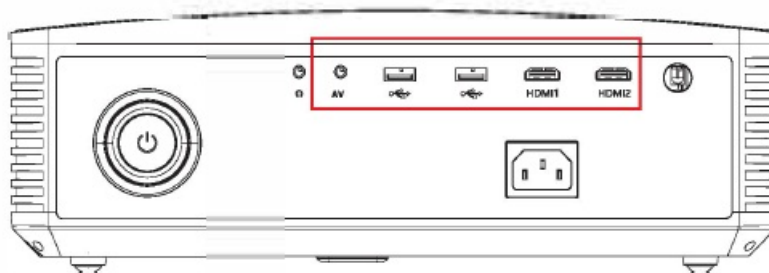

Once the HDMI / AV is connected to the projector, you will need to select the specific signal source as the input. After connection the content played on the source will be streamed on the projector.

Projector distance & size

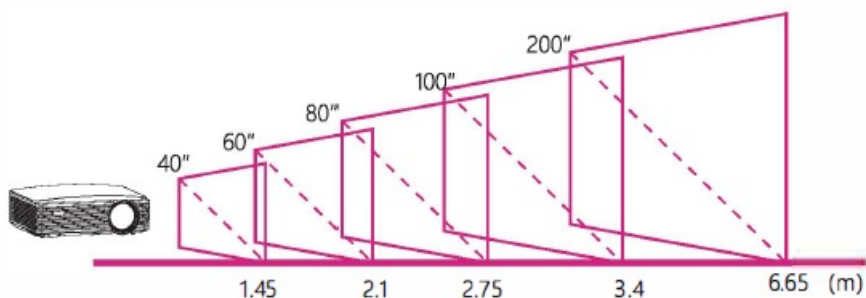

Note:

Due to optical device error of about 3%, the above data is for reference only, Please use actual measurement when installing the device. ISO 9001:2015 Certified Company www.zebronics.com

Documents / Resources

	<p>ZEBRONICS Smart LED Projector [pdf] User Manual</p> <p>Smart LED Projector, LED Projector, Projector</p>
---	--