

[Skip to content](#)

[Manuals+](#)

User Manuals Simplified.

Home » [ZEEPORTE](#) » ZEEPORTE Smart IP Camera with Battery User Guide 

ZEEPORTE Smart IP Camera with Battery User Guide

Contents [[hide](#)]

[1 Smart IP Camera with Battery Quick User Guide](#)

[2 1. Packing list](#)

[3 A4 Camera:](#)

[4 2. Product Details](#)

[5 3. Install Adorcam APP](#)

[6 4. Add Camera to APP](#)

[7 5. Device Menu](#)

[8 Camera Settings Menu:](#)

[9 6. Share Video to Friend](#)

[10 Appendix:](#)

[10.1 LED Status Description](#)

[10.2 Trouble Shooting Sheet](#)

[11 File Downloads](#)

[12 Related Manuals](#)

Smart IP Camera with Battery Quick User Guide



**100% Wire-Free IP Camera with rechargeable battery
Place it Anywhere, Watch on Phone Anytime**

1

1. Packing list

A4 Camera:

What is in the Box?



Battery Camera



Bracket



Screw Set




USB Cable



Quick User Guide

1x camera, 1x bracket, 1x screws
1x USB cable, 1x Quick User Guide

2. Product Details

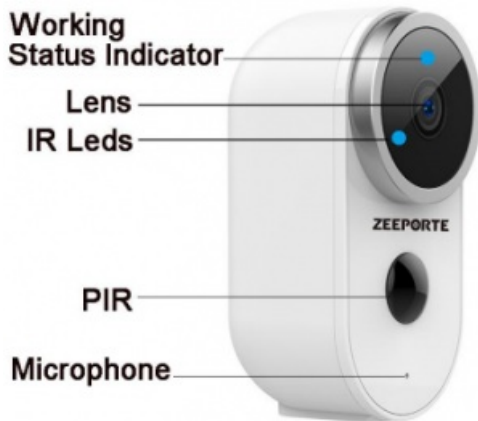

PIR, Lens, IR Leds



Speaker, Power Key

4

3. Install Adorcam APP

3.1 Search “Adorcam” in App store or google play store, or scan below QR Code to download and install on smart phone.



NOTE: Please allow below 2 permissions when first running App.

1. Allow Adorcam use mobile cellular data and wireless LAN (Function: If not allowed, it will be failed to add IP camera).
2. Allow Adorcam to get system push message permissions (Function: When the camera triggers motion detection or audible alarm, the phone can receive alarm push).

5



3.2 Register Account:

New users need to register by e-mail, click “Register” , follow the steps to complete the registration of the account, and log in.

4. Add Camera to APP

4.1 Insert TF card

Please insert a TF card to record videos when motion detected and playback. (card not included, supports 128GB Max.)

6

4.2 Power on the camera

Press and hold on the Power Button for 5 seconds to Turn on Camera (if it can not power on, please plug in DC5V 1A/2A phone adapter to charge 15min first). **Power adapter is not included in packing list.**



NOTE: Ensure the indicator light slowly flashing in RED before setup WiFi.

4.3 Setup Wi-Fi

4.3.1 Bring the camera and phone to the router within 1 to 3 feet (30 to 100 cm) and connect wifi.



NOTE: Please note camera only works under 2.4G Wi-Fi, not supports 5G Wi-Fi.

7

4.3.2 Run Adorcam App, Click "Add Device" and select "Battery Camera".


4.3.3 Select 2.4Ghz WiFi SSID and input password, tap "Connection"

4.3.4 Follow the "Operation Guide" on App, aim the lens of the camera directly to the QR code at a distance of 5-8 inches. A tone will be heard when successfully scanned.



4.3.5 After the device recognizes the QR code, it will sound a tone, if heard it, then tap "Hear a tone" and waiting for "Connect Network".

4.3.6 After successfully connected the network, you can name the camera, and find a good mounting spot according to the wifi signal strength, then click "Finish" and it will jump to device list. Select one camera and play it, then you can watch the real-time video.

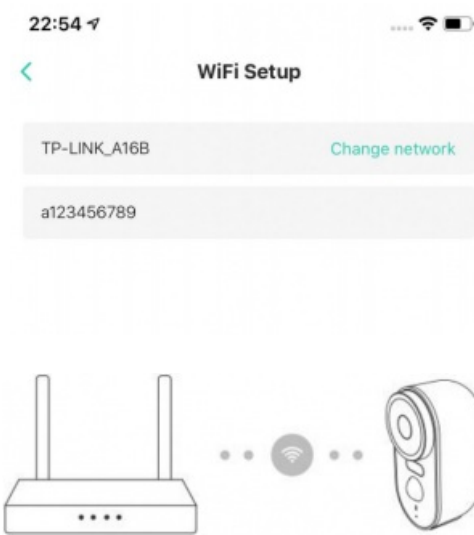

Tips:

1. Please select 2.4G HZ WiFi
2. Does not support 5G HZ WiFi
3. Move the camera closer to the wireless router to ensure a good wireless signal




Please remove the protective film on the camera lens and keep the lens clean.

Tape Next to generate a QR code.

Aim the lens of the camera directly at the QR code at a distance of 5-8 inches.

A tone will be heard when successfully scanned.

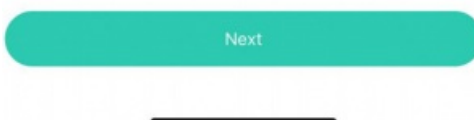




The network is connecting, please be patient.

Tips:

If the network connection is unsuccessful:

1. Please check if the WiFi username and password are correct, and then generate new QR code to scan again
2. Move the camera closer to the wireless network router
3. If it is still unsuccessful, please press the power button twice to reset the camera and try again

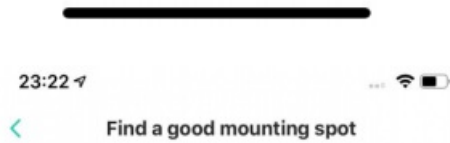


Take the camera and your smart phone to the location you want to mount the camera to check the strength of the WiFi Signal.

WiFi Signal Strength:




The current location is good to mount the camera



5. Device Menu




1. Play
2. Share
3. Snoone Alerts
4. Playback
5. Settings
6. Camera Name
7. Battery Volume
8. WiFi Signal

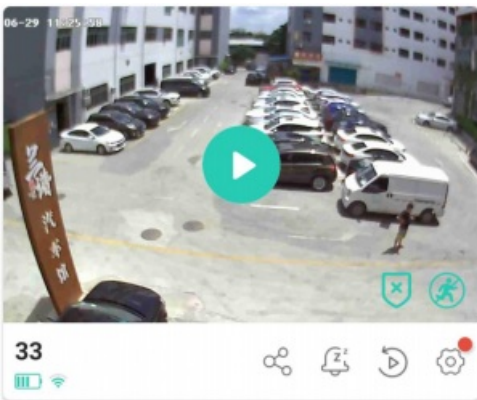

9. Disarm Mode

10. Motion Detection Off
11. Camera Time
12. Messages
13. Help
14. About app
15. Devices

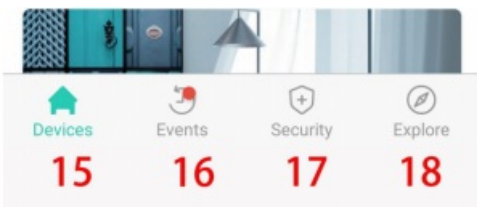


16. Events
17. Security
18. Explore




- 19. Bit rate
- 20. Record
- 21. Snapshot
- 22. Hold & Speak
- 23. Audio
- 24. Menu
- 25. Events
- 26. Night Vision
- 27. Sound Alarm
- 28. Settings
- 29. Close

12


Camera Settings Menu:

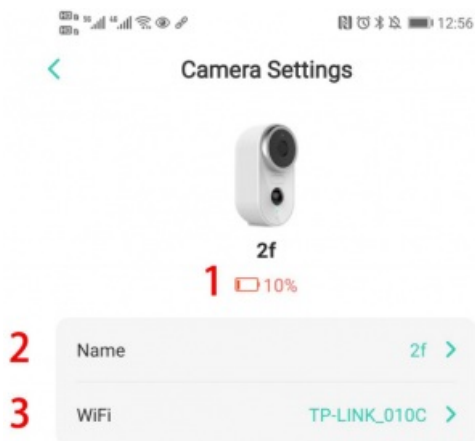

- 1 Battery Volume
- 2 Camera Name
- 3 WiFi

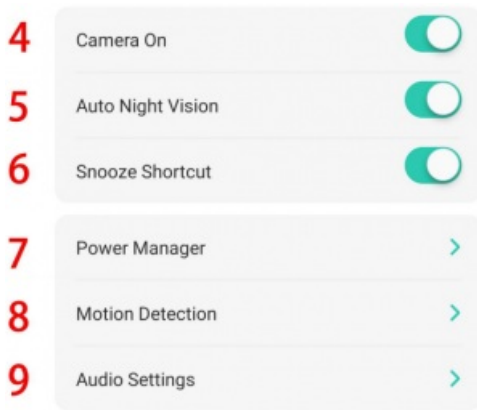

- 4 Camera On
- 5 Auto Night Vision
- 6 Snooze Shortcut
- 7 Power Manager
- 8 Motion Detection
- 9 Audio Settings

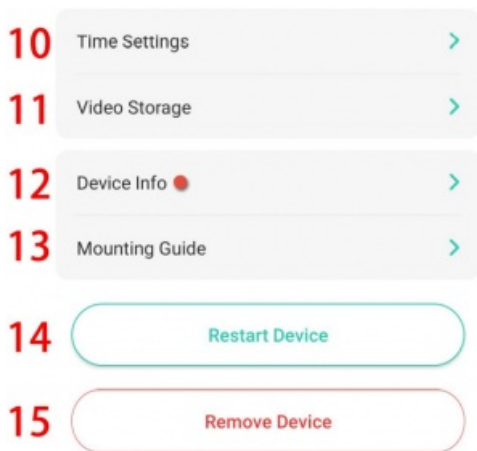


- 10 Time Settings
- 11 Video Storage
- 12 Device Info
- 13 Mounting Guide
- 14 Restart Device
- 15 Remove Device


6. Share Video to Friend

Click share icon or option and select permission and select connected cameras and input the friend's account to share.

NOTE: Firstly ensure Friend's account has already registered in Adorcam app

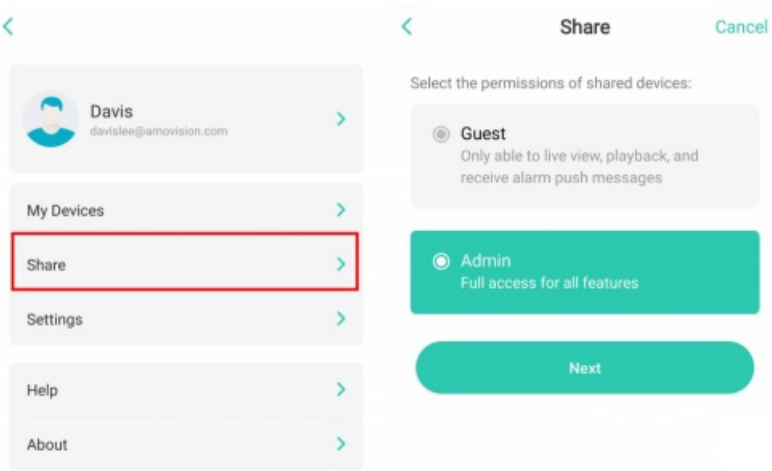

14

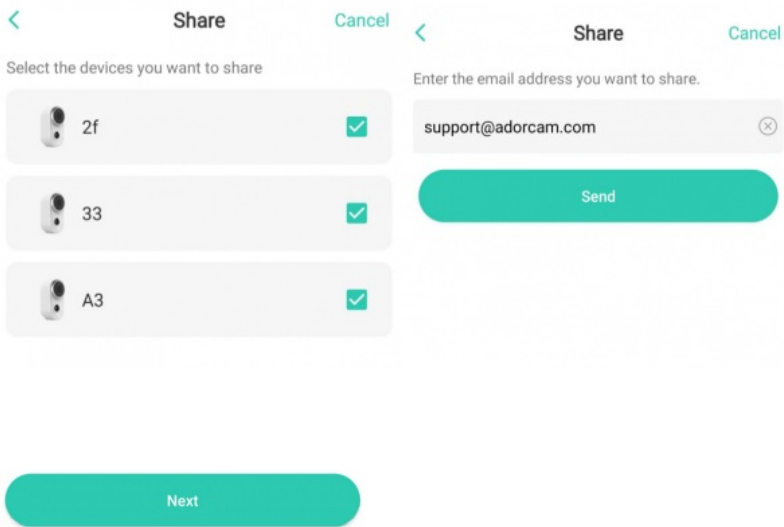

15

Appendix:

LED Status Description

No.	Indicator description	Camera status
1	No light	Sleep / shutdown
2	Red light solid on	In charging
3	Red light flashes slowly (once every second)	Awaiting for WiFi connection
4	Fast red light (multiple times a second)	WiFi connecting
5	Blue light solid on	Alarm recording
6	Blue light flashes slowly (once every two seconds)	Camera in live view status
7	Blue light flashes quickly (multiple times a second)	Upgrading status

No.	Description	Solution and operation
1	Unable to connect	1) Check your WiFi name and password 2) Ensure your WiFi is 2.4G HZ, not the 5G HZ WiFi. 3) Ensure your camera and phone close to router
2	Reset	1) Press and power button twice Hear one tone. 2) Red light turns to flash slowly
3	Change to a new Network	1) If camera is online, you can select one new WiFi, input password to change; 2) If camera is not online, reset the camera and connect it to new wifi.
4	Failed to add Device	Please enable Adorcam app cellular data on in mobile settings
5	No Alarm Push	Please enable Adorcam app notification in mobile settings
6	No Alarm Video Record	Please insert TF Card

FAQ:

1. Battery Camera doesn't support 7/24 constantly recording, only supports events recording when sensor human body motion detection.
2. Battery camera doesn't support any PC S/W or browser.
3. Battery Camera doesn't support 5G Wi-Fi
4. Battery Camera charging supports DC5V 1A/2A plug. fully charged time: 5-6 hours

5. IP battery camera support **offline recording**.
IP battery camera cannot work without Wi-Fi. It supports events recording when Wi-Fi disconnected, but firstly the camera should be ever connected with Wi-Fi network.
6. It is unlimited to add IP camera to app, and also unlimited to share video to other person. But system just allowed 2 persons online in max simultaneously.
7. Regarding with TF card:
 - 7.1 please kindly ensure TF card, good brand such as Kingston, Sandisk, Class 10 level, 4-128 GB
 - 7.2 Please first format TF card on PC or plug in it again when adorcam cannot read the TF card.
 - 7.3 If no TF card in camera, there is no alarm recording, system will snap photos and be saved in "Events" list. If inserted TF card, there will be no snapshot photos.**

18

File Downloads

Smart IP Camera with Battery
Quick User Guide



User Guide [Download](#) [optimized]
Smart IP Camera with Battery [Download](#)

100% Wire-Free IP Camera with rechargeable battery
Place it Anywhere, Watch on Phone Anytime

Related Manuals

1. [YESKAMO Smart battery Powered IP Camera User Manual](#) YESKAMO Smart battery Powered IP Camera Statement Though we apply...
2. [UniFi 1080p Indoor Outdoor IP Camera Infrared Optical Zoom User Guide](#) UniFi 1080p Indoor Outdoor IP Camera Infrared Optical Zoom Installation...
3. [CONICO Wireless IP Camera Installation Guide](#) Wireless IP Camera COMICO Quick Installation Guide E-mail: support@i-conico.com Note:...
4. [reolink QG4_A PoE IP Camera Quick Start Guide](#) reolink QG4_A PoE IP Camera Quick Start Guide 01. Access...
5. [ZUMIMALL Battery Powered Camera User Guide](#) ZUMIMALL Battery Powered Camera User Guide ZUMIMALL Battery Powered Camera...
6. [nedis IP camera User Manual](#) nedis IP camera Description Status indicator Reset button Speaker Microphone...