

zxtech QSG6 Wireless Camera



zxtech QSG6 Wireless Camera User Manual

[Home](#) » [Zxtech](#) » zxtech QSG6 Wireless Camera User Manual 

Contents

- 1 [zxtech QSG6 Wireless Camera](#)
- 2 [Product Information](#)
- 3 [Product Usage Instructions](#)
- 4 [INITIAL SETUP](#)
- 5 [DOWNLOAD THE APP](#)
- 6 [MOBILE SETUP](#)
- 7 [SD CARD SETUP](#)
- 8 [PC & WEB ACCESS](#)
- 9 [ACCESS CAMERA VIA BROWSER ON WINDOWS](#)
- 10 [FACTORY RESET](#)
- 11 [Documents / Resources](#)
 - 11.1 [References](#)
- 12 [Related Posts](#)



zxtech QSG6 Wireless Camera



Product Information

Specifications:

- Brand: Domar CCTV
- Model: Wireless Cameras
- Power Input: 12V
- Interface: RJ45 Network Port

Product Usage Instructions

Initial Setup:

1. Do not power up the camera while it is still in the package.
2. Locate the 12V power input, RJ45 interface, network port, and reset button on the camera.

Download the App:

1. Download the app from the Google Play Store for Android devices or the App Store for iOS devices.

Mobile Setup:

- **Step 1:** Search for the new camera within the app.
- **Step 2:** Add the new camera to your account.
- **Step 3:** Change the default password to a secure one (compulsory).
- **Step 4:** Connect the camera to your Wi-Fi network.
- **Step 5:** Camera is now ready for installation.

SD Card Setup:

- **Step 1:** Insert the SD card into the designated slot on the camera.
- **Step 2:** Format the SD card using the camera's interface.
- **Step 3:** Set up motion recording and detection alarm preferences.
- **Step 4:** Configure the recording schedule based on your preferences.
- **Step 5:** Access playback of recorded files on your mobile phone, organized by date.

PC & Web Access:

1. Download the search tool from <https://domar.com/pages/cctv-tech-support> for PC access.
2. Access the camera via a web browser on a Windows PC using the provided link.

Factory Reset:

To perform a factory reset, press and hold the reset button on the camera for 15 seconds.

Contact Support:

If you need further assistance, visit <https://domar.com/support> for help and support.

Frequently Asked Questions (FAQ)

- **Q: What should I do if I forget my camera's password?**

A: You can perform a factory reset by holding the reset button for 15 seconds to restore default settings.

- **Q: Can I access live footage from the camera on multiple devices simultaneously?**

A: Yes, as long as each device is connected to the same account and network, you can view live footage on multiple devices simultaneously.


WIRELESS CAMERAS MANUAL
QUICK START GUIDE MADE BY DOMAR CCTV
[DOMAR.COM](https://domar.com)



- The default username is admin
- The default password is admin

INITIAL SETUP

- DO NOT power up the camera when it is still in the package.

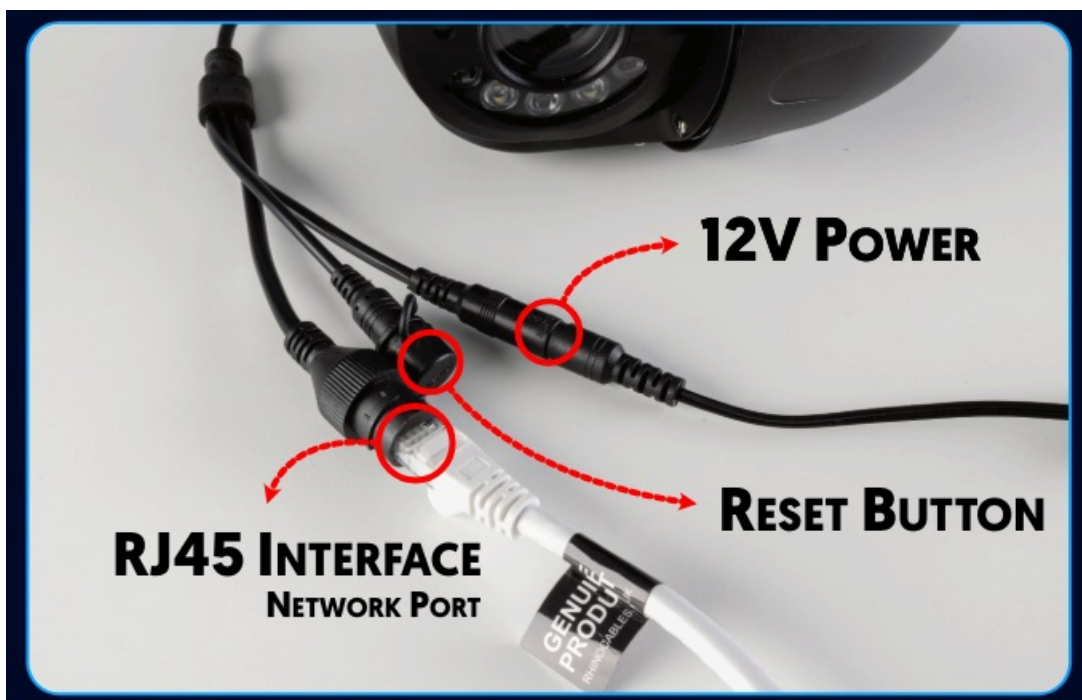


- Connect the 12V power adapter provided.
- Do NOT use third party power supply units.
- It may needs a few minutes to self checking and then start functioning.
- Connect camera to the router via ethernet cable provided.

- Network indicators light solely flashing GREEN means network is normal.


DOWNLOAD THE APP

- After the camera's initial self checking, download CAMHIPRO App from APP STORE OR GOOGLE PLAY SHOP.

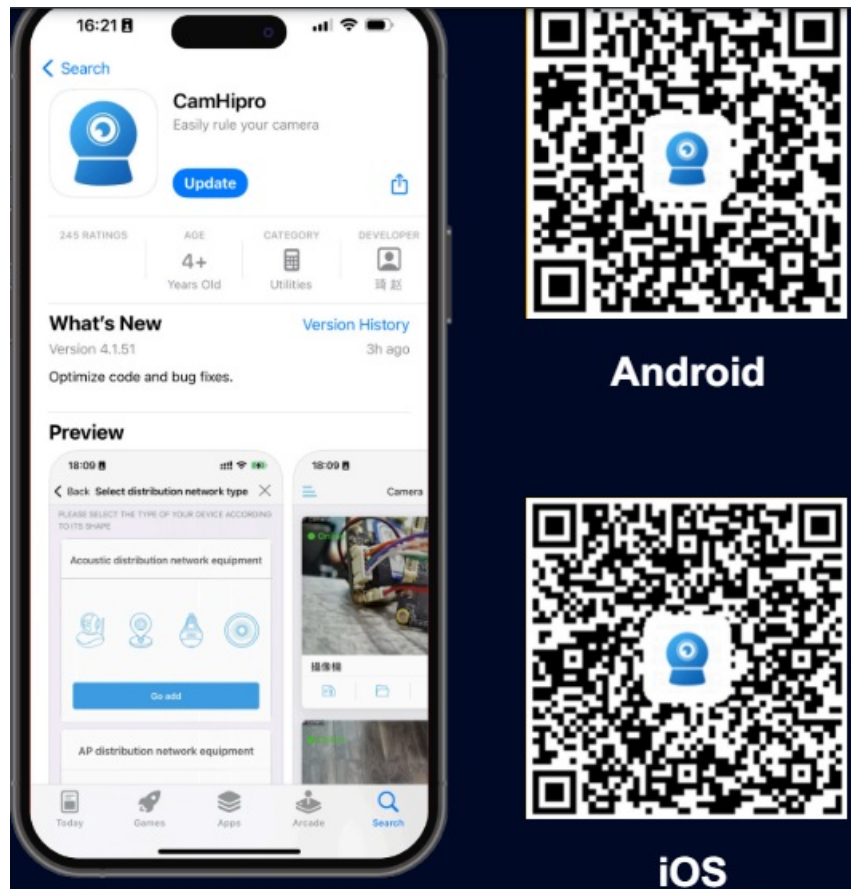


MOBILE SETUP

- STEP 1: SEARCH FOR NEW CAMERA

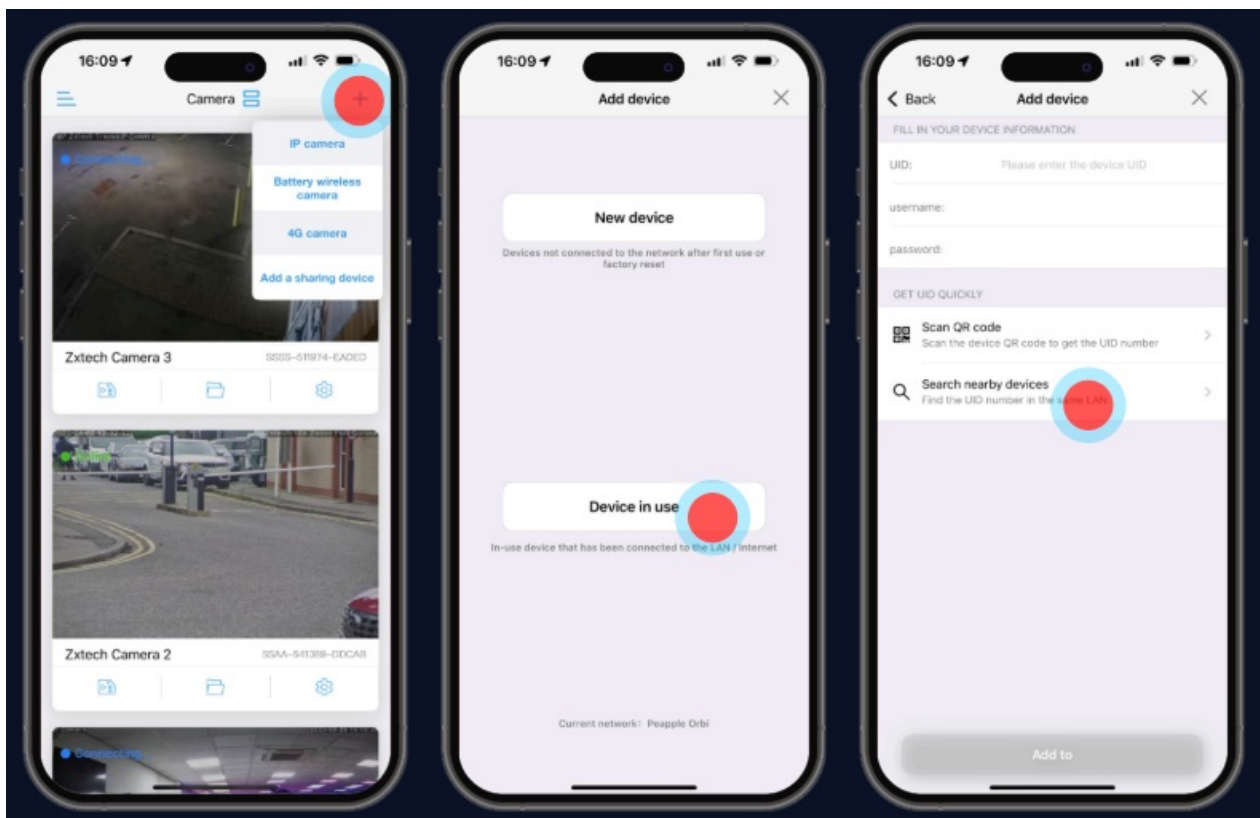


- Tap the “+” Icon on the Top Right Corner.
 - Select IP CAMERA > DEVICE IN USE > Search nearby devices.
 - Tap on SEARCH NEARBY DEVICES to search for all available devices.
- STEP 2: ADD THE NEW CAMERA

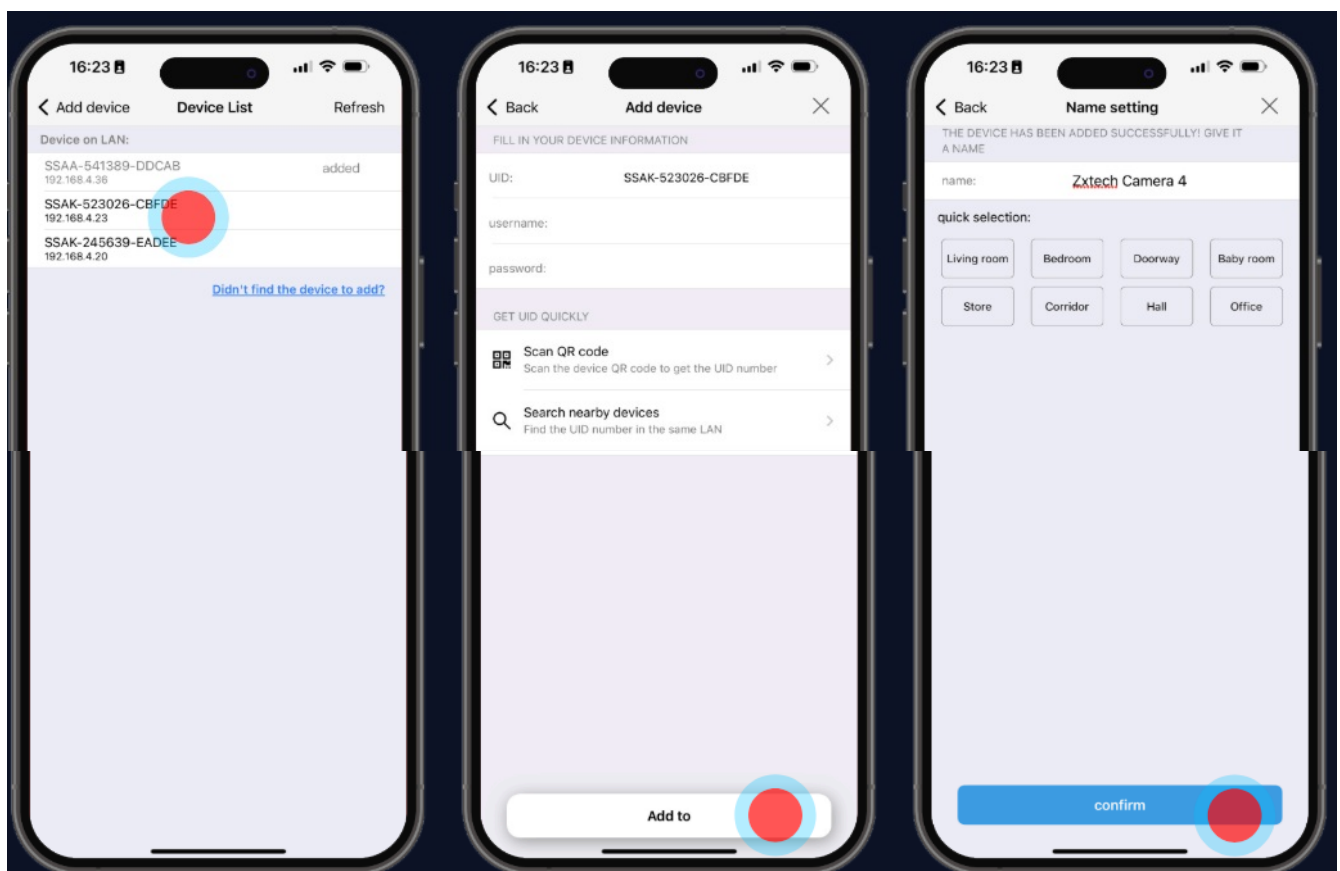


- Choose the device from the list automatically provide.
- The default username and password should be automatically enter.
- If not, the default username is admin and password is admin
- Confirm to proceed.

- STEP 3: CHANGE PASSWORD (COMPULSORY)

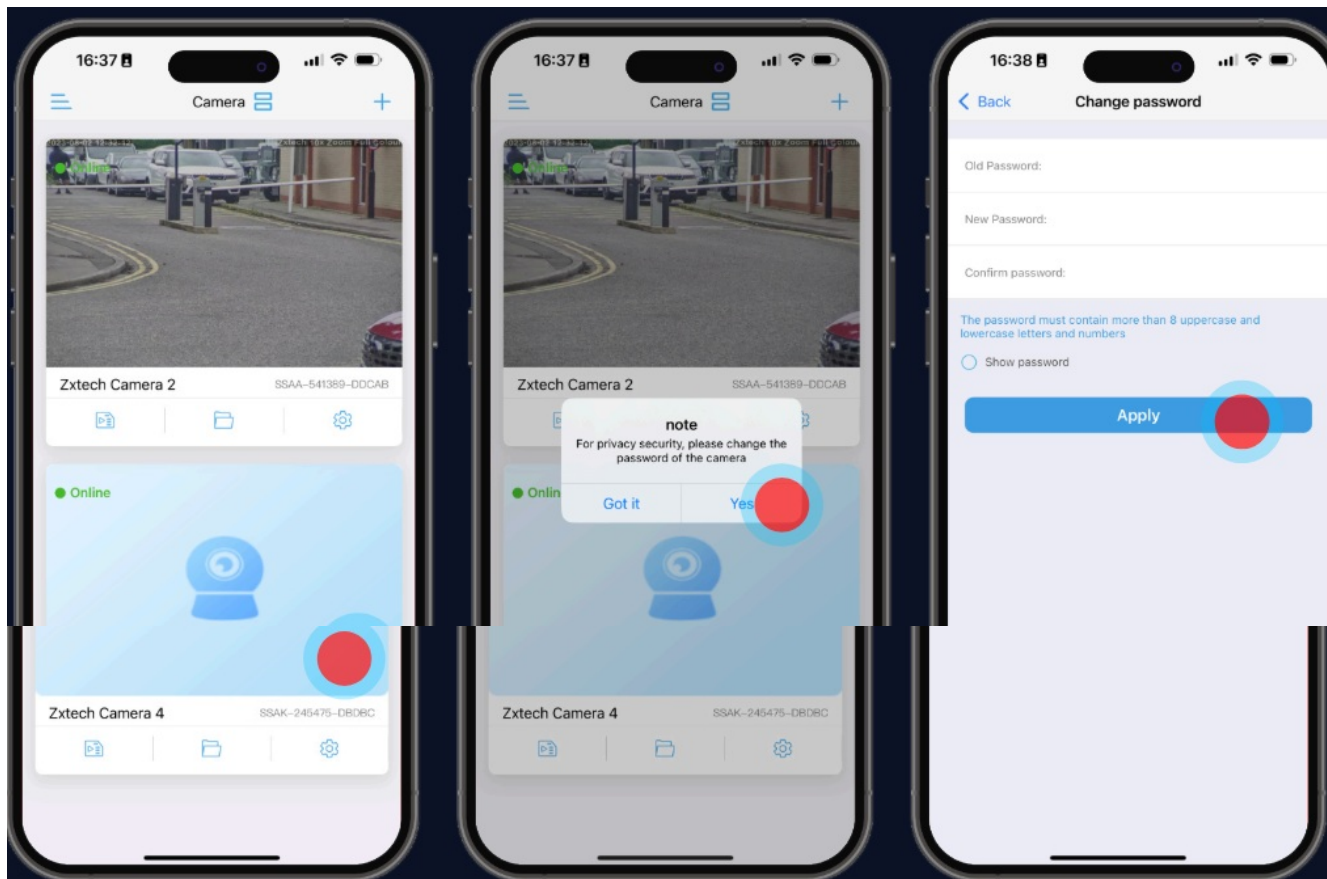

- First time you try to view the camera, it will force you to reset the password.
- Tap YES to enter the password-resetting page.
- Enter the old (default) password admin, and then enter your new password twice.
- Tap Apply to proceed.

- STEP 4: CONNECT CAMERA TO WIFI

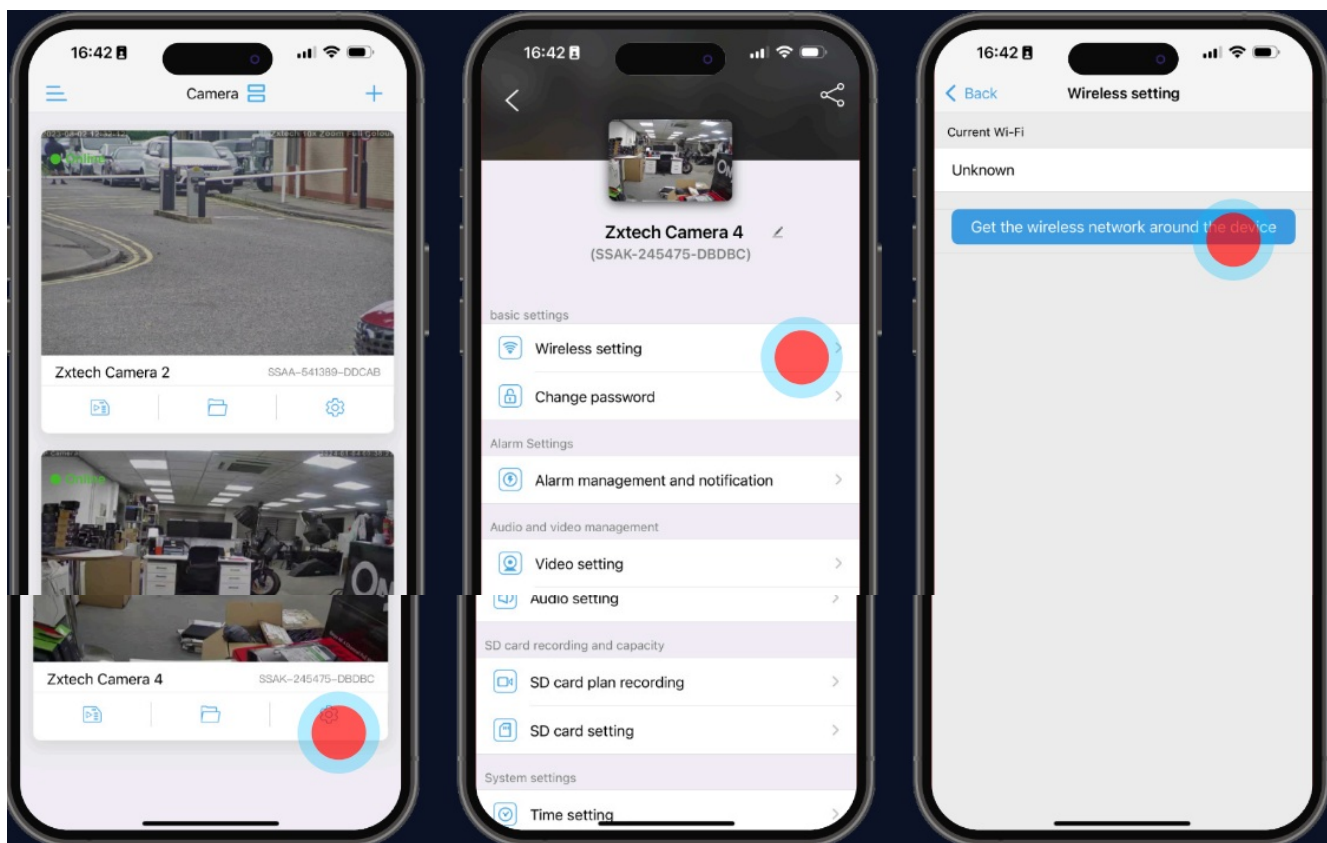

- Press WIRELESS SETTING to setup Wi-Fi.

- Select your home network after Press GET THE WIRELESS NETWORK AROUND THE DEVICE.
- Select the correct network, enter your Wi-Fi password and APPLY
- STEP 5: READY FOR INSTALLATION



- Once you complete the last step, you may unplug the Ethernet cable.
- The CamHipro App will automatically connect the camera via Wi-Fi.
- Unplugging the power will not alter the camera's settings, and it will be ready for installation.
- Only install the camera after thoroughly testing and confirming satisfaction with its features, since installation signifies usage and nullifies the 30-day return policy.

SD CARD SETUP


- STEP 1: SD CARD INSTALLATION






- You may not have the same camera in this manual, but the same principle applies.
- Remove the cover from the camera by unfastening the screws at the bottom. Insert the Micro SD card.

• STEP 2: FORMAT THE SD CARD

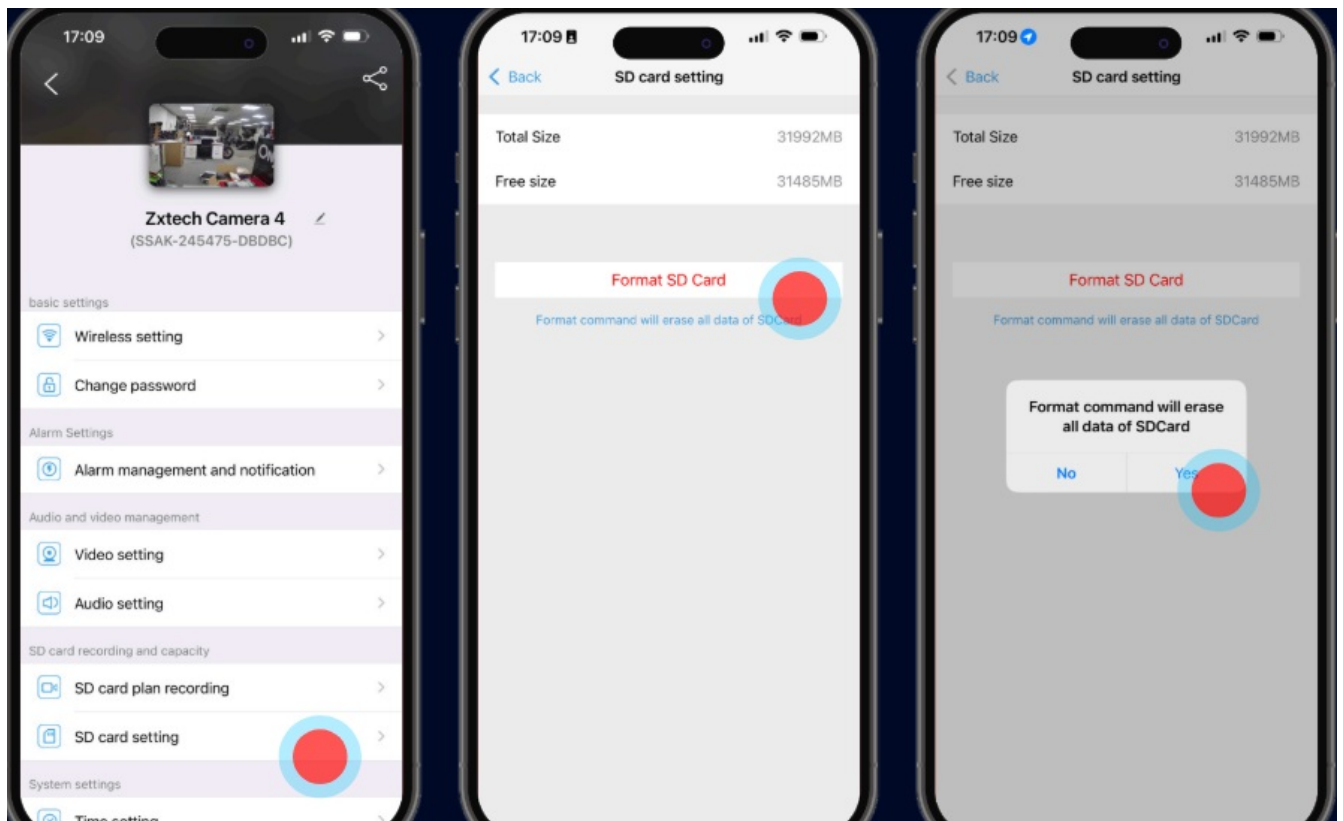


- SD card must to be formatted before recording start to work.
- It is recommend to use SD card above CLASS 10
- Use CAMHIPRO > SD CARD SETTING to Format the SD card when adding for the first time.
- You should be able to see the “FREE SIZE” of the SD card after the format. If “Free Size” equals to Zero, you will have to format it again.

• STEP 3: SETTING UP MOTION RECORDING

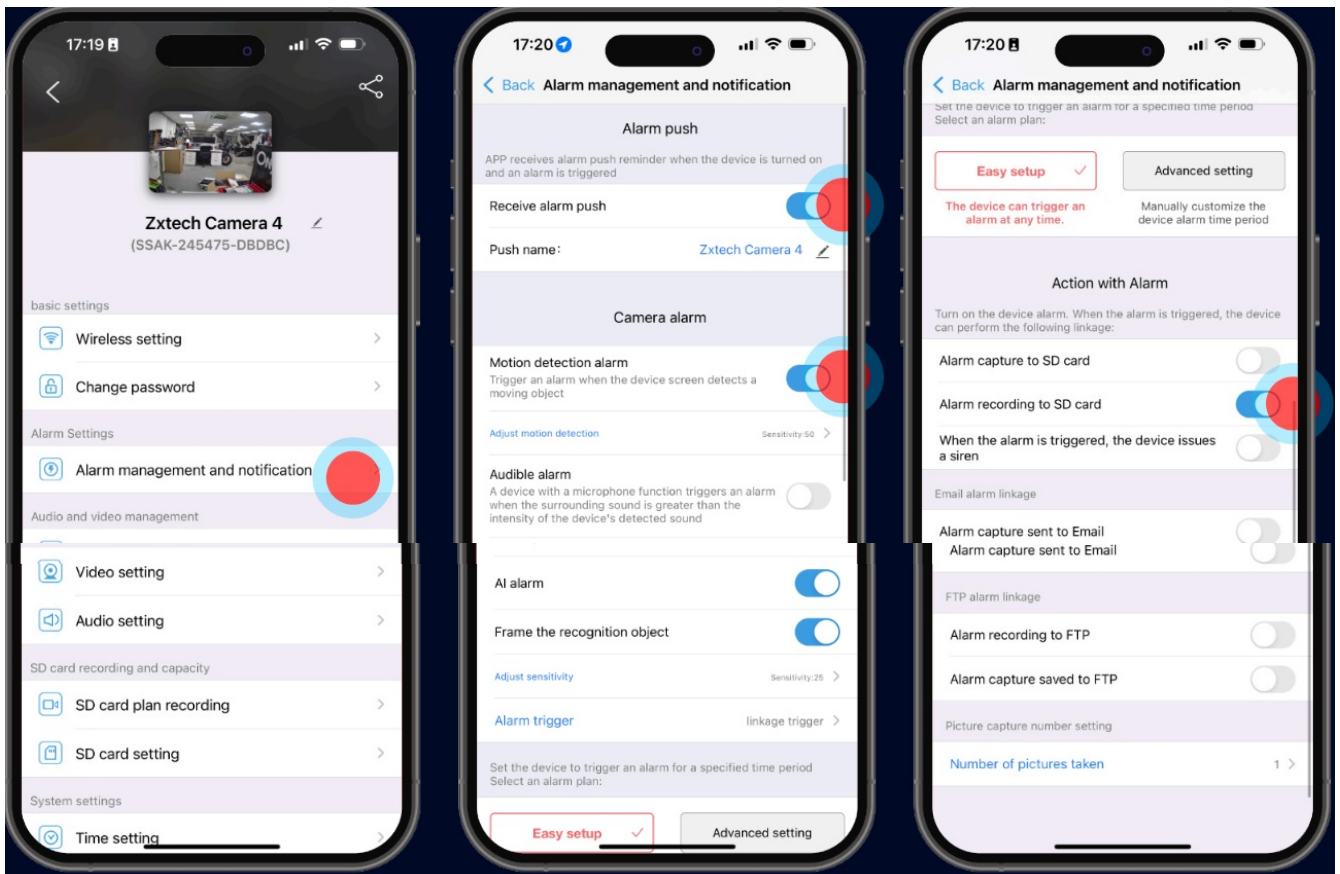


- Set NOTIFICATION and MOTION DETECTION alarm recording on the phone.
- Turn on RECEIVE ALARM PUSH and MOTION DETECTION ALARM
- ALARM RECORDING TO SD CARD is recommended when the Micro SD card is small.

• STEP 4: SETTING UP RECORDING SCHEDULE

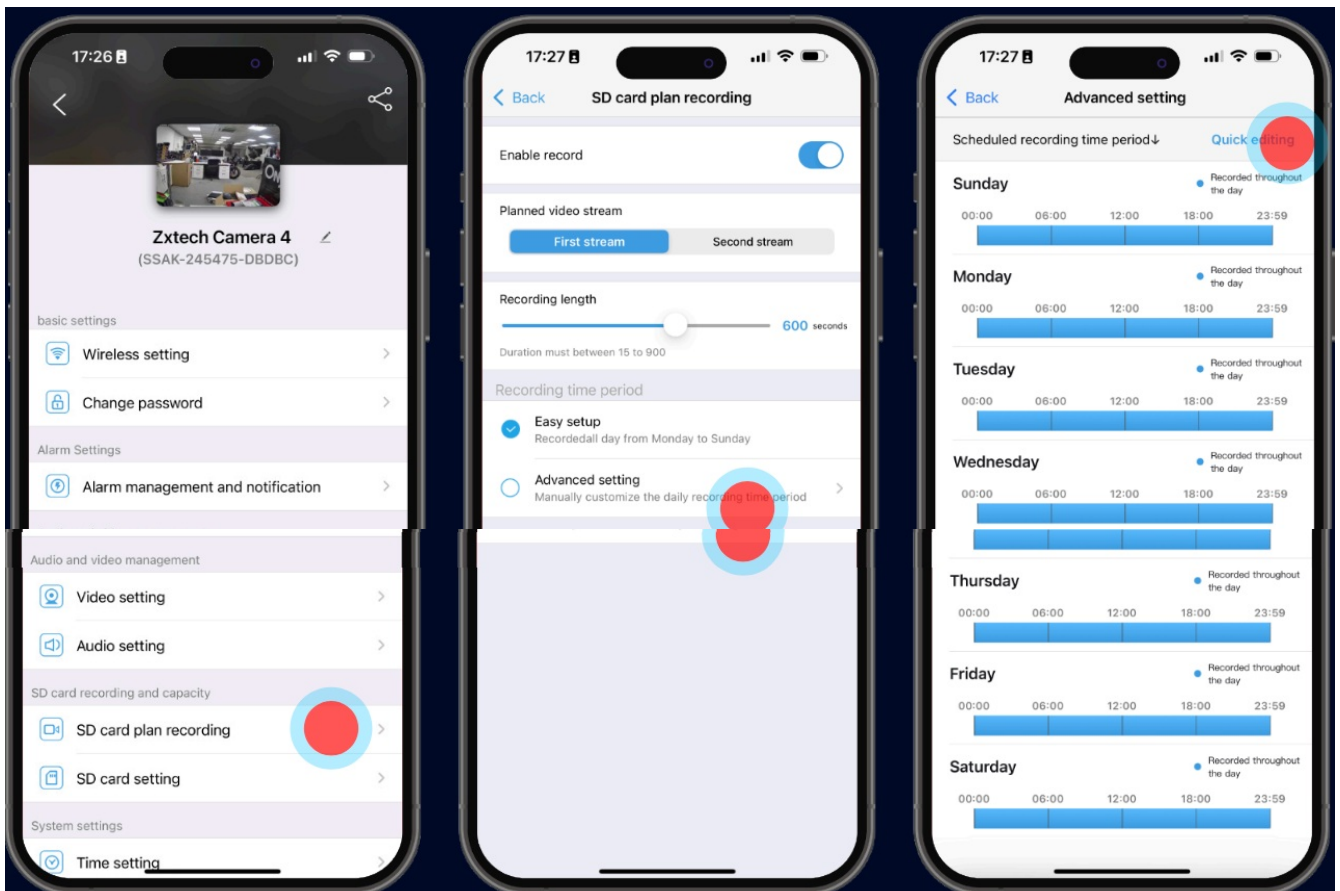

- Go to SD CARD PLAN RECORDING
- Tap on ADVANCED SETTING
- Tap on the Quick editing and follow the steps to customise the timely recording preferences.

- STEP 5: PLAYBACK RECORD ON PHONE

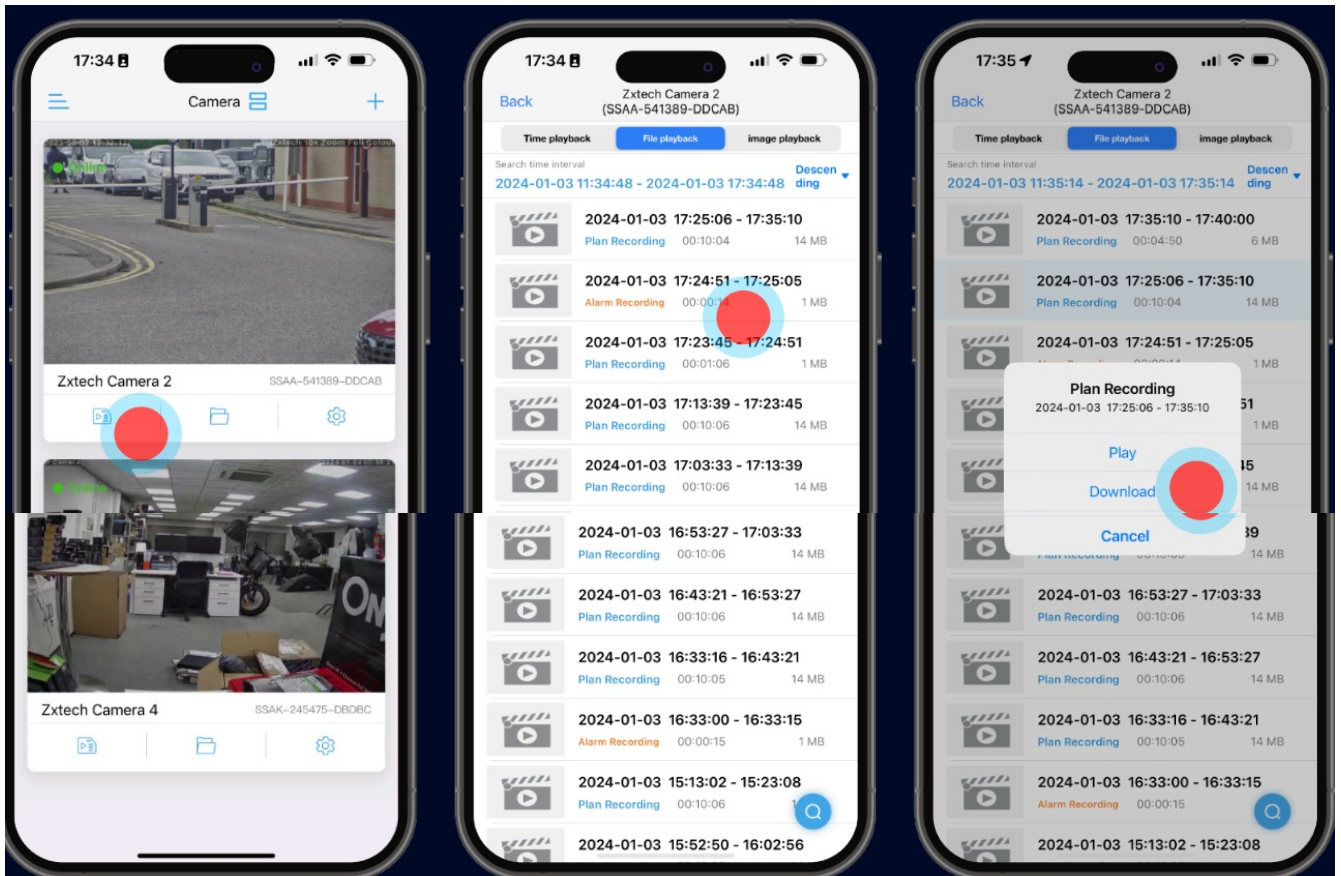

- Tap the SD CARD ICON on the intended camera
- Tap on any recording footage
- You can choose to PLAY or DOWNLOAD footages and images.
- You can also select TIME PLAYBACK to filter the recording file easily by date.

PC & WEB ACCESS

- DOWNLOAD SEARCH TOOL FROM:

<https://domar.com/pages/cctv-tech-support>

◦



- It is recommended to use a smartphone for configurations.
- PC and browser access should be considered as a backup method.
- You can configure all the parameters of the cameras.
- If you are not using the IE browser, some settings might be missing.

FACTORY RESET

PRESS & HOLD RESET BUTTON FOR 15 SECONDS




- If the reset is successful, you will hear a chime.
- The camera will restore to its factory default settings.

- It is recommended not to reset the cameras after installation, as reconnecting the camera to your router will require you to take the camera off the wall.



Visit <https://domar.com/support> for help and support.

Documents / Resources

	<p>zxttech QSG6 Wireless Camera [pdf] User Manual QSG6, QSG6 Wireless Camera, Wireless Camera, Camera</p>
---	---

References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.