



ANALOG DEVICES LT8350S Evaluation Board User Guide


[Home](#) » [Analog Devices](#) » ANALOG DEVICES LT8350S Evaluation Board User Guide 

Contents

- [1 ANALOG DEVICES LT8350S Evaluation Board](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 General Description](#)
- [5 Features and Benefits](#)
- [6 EVAL-LT8350S-AZ Board Photo](#)
- [7 Table 1. Performance Summary \(Specifications are at TA = 25°C\)](#)
- [8 Quick Start Required Equipment](#)
- [9 Hardware Set-Up](#)
- [10 Electromagnetic Interference Result](#)
- [11 Evaluation Board Bill of Materials](#)
- [12 Evaluation Board Schematic](#)
- [13 Evaluation Board PCB Layout](#)
- [14 Documents / Resources](#)
 - [14.1 References](#)
- [15 Related Posts](#)



ANALOG DEVICES LT8350S Evaluation Board

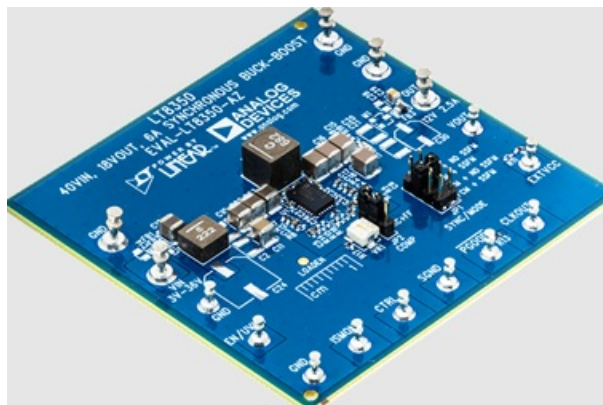

Product Information

Specifications

- **Product Name:** EVAL-LT8350S-AZ
- **Model:** LT8350S
- **Input Voltage Range:** 3V to 40V
- **Output Voltage Range:** 18V
- **Maximum Output Current:** 6A
- **Switching Frequency:** 200kHz to 2MHz
- **Features:** Synchronous Buck-Boost, Adjustable switching frequency, Internal MOSFETs, EMI filters

Product Usage Instructions

1. Connection and Setup

Ensure the input voltage is within the range of 3V to 40V. Connect the necessary input and output components following the recommended layout.

2. Adjusting Output Current

To regulate output current, adjust ISP and ISN settings. For constant voltage regulation, limit the maximum load current. For LED driver or battery charger applications, ensure constant current regulation by adjusting the CTRL pin voltage.

3. Monitoring and Improving Load Response

Monitor output current through the ISMON pin. Use ISMON to enhance load transient response by injecting load current to VC.

4. EMI Filtering and Layout

Utilize the inductor and ferrite bead EMI filters on the input and output. Follow the recommended layout and use a four-layer PCB with proper board thickness for low EMI applications.

5. Thermal Performance

Ensure proper board layout for maximum thermal performance, especially due to the thermally enhanced exposed ground pads in the laminate package.

FAQ (Frequently Asked Questions)

• Q: What is the recommended input voltage range for LT8350S?

A: The operating input voltage range for LT8350S is 3V to 40V.

• Q: How can I adjust the output current of LT8350S?

A: Output current can be regulated using ISP, ISN, and by adjusting the CTRL pin voltage.

• Q: How can I improve load transient response?

A: Monitor output current through ISMON and inject load current to VC to enhance load transient response.

Evaluation Board User Guide

EVAL-LT8350S-AZ

LT8350S 40VIN, 18VOUT, 6A Synchronous Buck-Boost Silent Switcher 2

General Description

- The EVAL-LT8350S-AZ Evaluation board is a 40V synchronous buck-boost converter featuring the LT®8350S. It drives up to 2.5A load at 12V output when VIN is between 9V and 40V and will run down to 3VIN with reduced output current. EVAL-LT8350S-AZ runs at 350kHz switching frequency with spread spectrum frequency modulation (SSFM) disabled. When enabled, SSFM spreads the switching frequency of the LT8350S from fSW to fSW + 25% for a reduced electromagnetic interference (EMI) emission.
- The LT8350S has an operating input voltage range of 3V to 40V. It has internal, synchronous 42V MOSFETs on the buck side and 20V MOSFETs on the boost side for high efficiency and small size. It has an adjustable switching frequency between 200kHz and 2MHz. The LT8350S can be synchronized to an external source, programmed with SSFM enabled for low EMI, or set to normal operation.
- The LT8350S' integrated LOADTG high-side PMOS driver assists with disconnecting load when a fault is triggered. LOADTG turns off the PMOS when $FB < 0.25V$ or $FB > 1.1V$, or
- $ISP - ISN > 0.75V$. LOADEN can be used directly to turn off LOADTG and all power switches.
- The LT8350S can regulate output current using ISP and ISN. Maximum load current can be limited when LT8350S is used for a constant voltage regulator. It can also be used for an LED driver or a battery charger where constant current regulation is required. Output current can be adjusted by placing a controllable DC voltage on the CTRL pin.
- The output current can be monitored through the ISMON output pin. ISMON can be used to improve load transient response by injecting load current to VC. The load current injection is described in the following sections.
- An Undervoltage lockout can be adjusted on EVAL-LT8350S-AZ with a few simple resistor choices.
- Small ceramic input and output capacitors are used to save space and cost. Although LT8350S has in-built high-frequency capacitors (100nF) on the input and output, the board is designed with tiny, high-frequency capacitors placed near the VIN and VOUT pins for added flexibility.
- There is an inductor EMI filter and a small ferrite bead EMI filter on the input and output of EVAL-LT8350S-AZ. These filters, combined with proper board layout and SSFM, are effective in reducing EMI to pass CISPR25 class 5 conducted EMI. Follow the recommended layout and four-layer printed circuit board (PCB) thickness of EVAL-LT8350S-AZ for low EMI applications.
- The LT8350S data sheet provides a complete description of the part, operation, and applications information. The data sheet must be read in conjunction with this demo manual for EVAL-LT8350S-AZ. The LT8350S is assembled in a 32-lead laminate package with QFN footprint (LQFN) with thermally enhanced exposed ground pads. Proper board layout is essential for maximum thermal performance.
- Design files for this circuit board are available at Product Evaluation Boards and Kits | Design Center | Analog Devices.

Features and Benefits

- 3V–40V Operating Input Voltage
- Reduced EMI emissions for CISPR 25 Class 5
- Spread Spectrum Frequency Modulation
- Input and Output EMI filter
- In-built Input and Output high-frequency capacitors
- Adjustable UVLO, VOUT, fSW, Output Current and Limit
- Voltage-Monitoring (PGOOD) and Current-Monitoring (ISMON)
- Configurable SYNC pin for Forced Continuous Mode (FCM), Discontinuous Conduction Mode (DCM), SSFM,

and external Frequency Synchronization

- Feed Forward Function for improved transient response

Ordering Information appears at end of data sheet

EVAL-LT8350S-AZ Board Photo

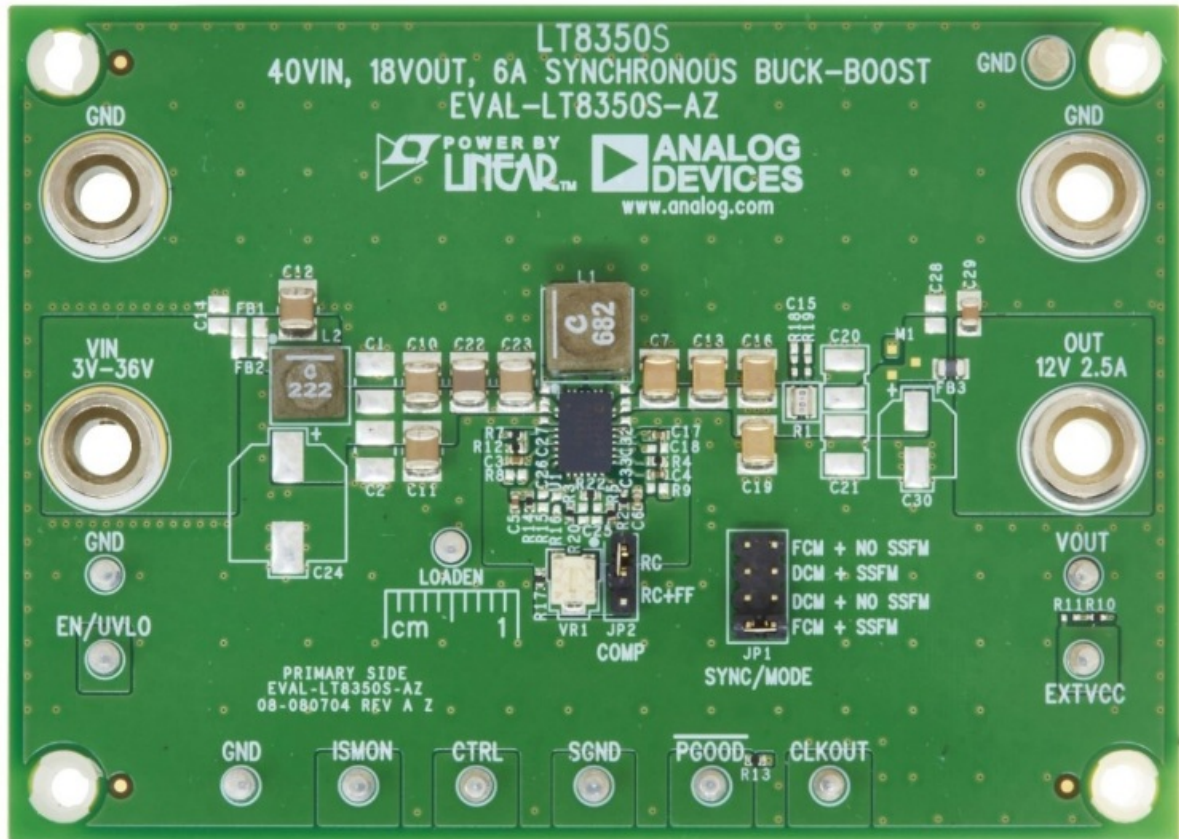


Figure 1. EVAL-LT8350S-AZ Board Photo Front View

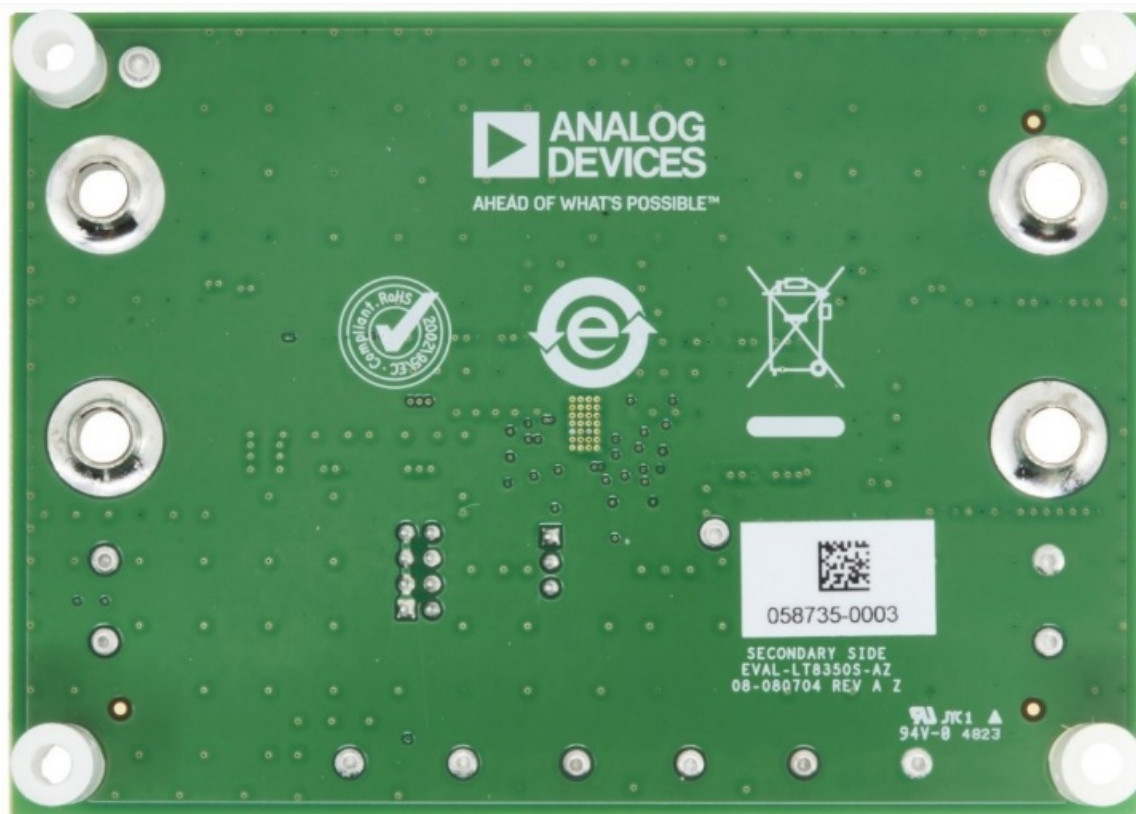


Figure 2. EVAL-LT8350S-AZ Board Photo Back View

Table 1. Performance Summary (Specifications are at TA = 25°C)

PARAMETER	CONDITIONS/NOTES	MIN	TYP	MAX	UNITS
Input Voltage VIN Range	Operating, R7 = 402k Ω , R12 = OPEN	3		40	V
Full Load (2.5A) Input Voltage Range	Component Temperature < 85°C at Room Temperature with No Airflow	7		40	V
Output Voltage (VOUT)	R22 = 100k Ω , R3 = 10.0k Ω	12.0			V
Output Voltage Ripple	VIN = 12V, VOUT = 12V, IOUT = 2.5A	50			mV
Maximum Output Current	7.0V < VIN < 40V, VOUT = 12V, fSW = 350 kHz	2.5			A
	7.0V < VIN < 40V, VOUT = 12V, fSW = 2M Hz	2.0			A
Switching Frequency (fSW)	R4 = 143k Ω , SSFM = OFF	350			kHz
	R4 = 143k Ω , SSFM = ON	350-400			kHz
	R4 = 14.3k Ω , SSFM = OFF	2000			kHz
	R4 = 14.3k Ω , SSFM = ON	2000-2520			kHz
Typical Efficiency without EMI filters	VIN = 12V, VOUT = 12V, IOUT = 2.5A	95			%
Typical Efficiency with EMI filters	VIN = 12V, VOUT = 12V, IOUT = 2.5A	94			%
Peak Switch Current Limit		6	7	8	A
VOUT Overvoltage Threshold	R22 = 110k Ω , R3 = 10.0k Ω	13.2			V
VIN Undervoltage Lockout (UVLO) Falling	R7 = 402k Ω , R12 = 84.5k Ω , IOUT = 2.5A	7.2			V
VIN Enable Turn-On (EN) Rising	R7 = 402k Ω , R12 = 84.5k Ω , IOUT = 2.5A	8.0			V

Quick Start Required Equipment

- EVAL-LT8350S-AZ
- Power Supply
- Voltmeters
- Ammeters
- Electronic Load

Procedure

EVAL-LT8350S-AZ Evaluation board is easy to set up to evaluate the performance of the LT8350S. See Figure 3 for proper measurement equipment setup and follow the procedure below. Ensure that the voltage applied to VIN does not exceed 40V, which is the voltage rating for input side MOSFETs.

1. With power off, connect a load capable of 12V 2.5A operation between OUT and GND terminal on the PCB, as shown in Figure 3.

2. Connect the EN/UVLO terminal to GND with a clip-on lead. Connect the power supply (with power off) and meters, as shown in Figure 3.
3. Set JP1 at NO SSFM to disable SSFM and at SSFM to enable SSFM.
4. Set JP2 at RC for typical loop compensation, at RC+FF for load current injection scheme which improves load transient response.
5. After all the connections are established, turn on the input power and verify that the input voltage is between 7V and 40V.
6. Remove the clip-on lead from EN/UVLO. Verify that the output voltage is 12V.

NOTE: If the output voltage is low, temporarily disconnect the load to ensure that it is not set too high. Once the proper output voltage is established, adjust the input voltage and load within the operating ranges and observe the output voltage regulation, ripple voltage, efficiency, and other parameters.

Hardware Set-Up





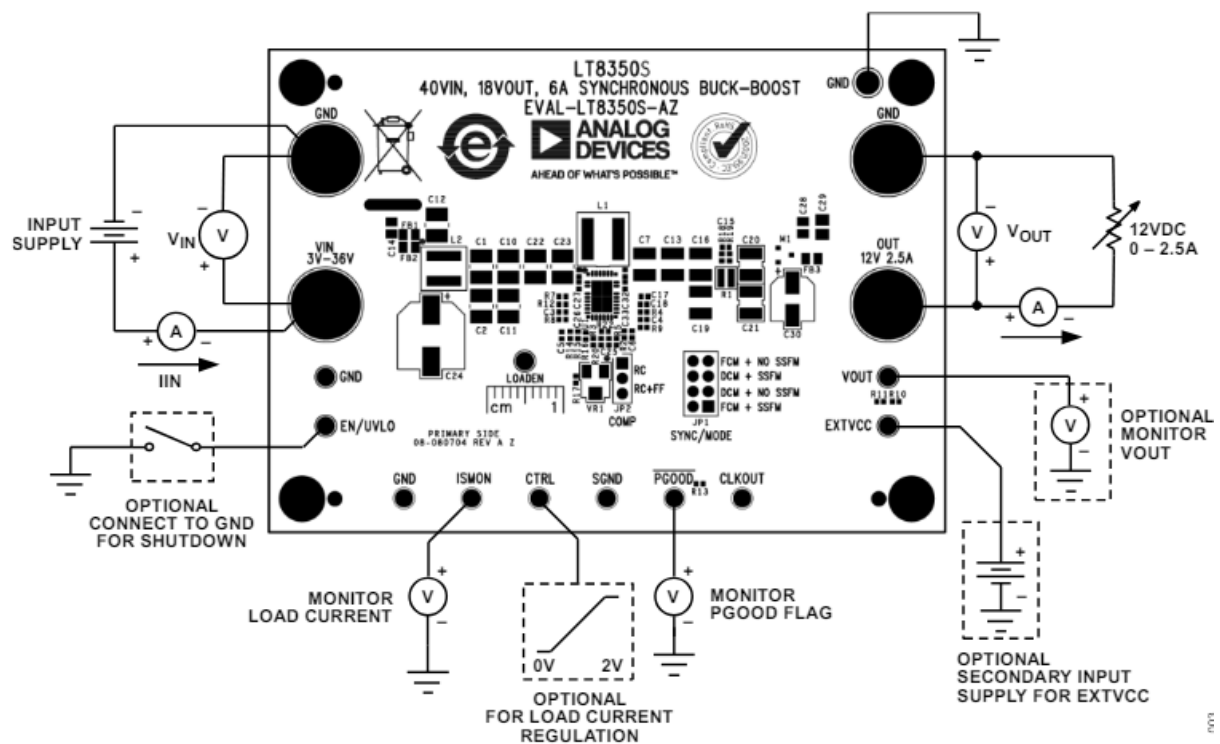


Figure 3. Test Procedure Setup Drawing for EVAL-LT8350S-AZ

Test Results fSW = 350kHz

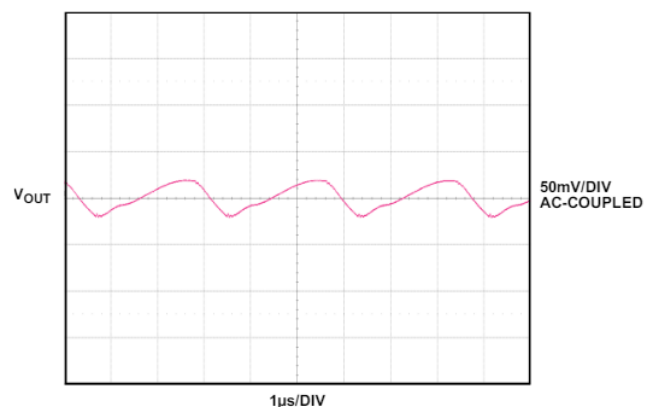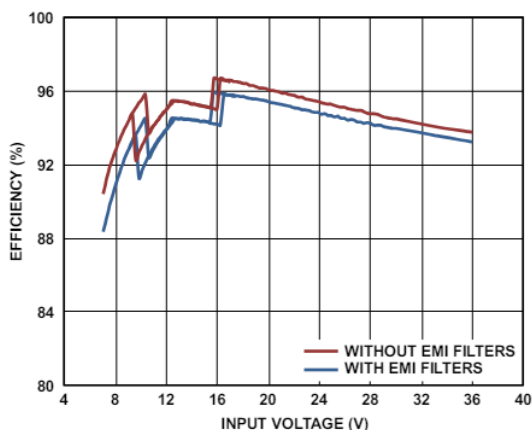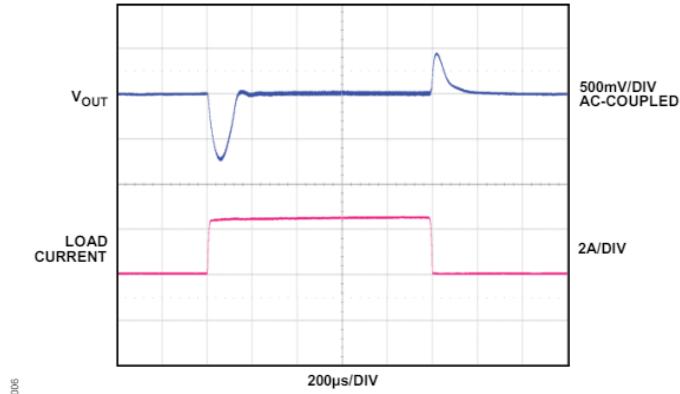

- Figure 4. EVAL-LT8350S-AZ Efficiency vs Input Voltage for 2.5A Load with SSFM
- Figure 5. EVAL-LT8350S-AZ Output Voltage Ripple at 12V Input Voltage and 2.5A Load

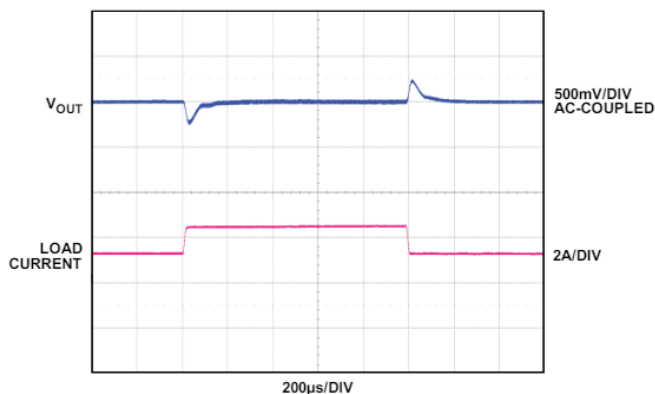

- Figure 6. EVAL-LT8350S-AZ Transient Response with JP2 = RC (12VIN and 12VOUT 2.5A to 1.25A)
- Figure 7. EVAL-LT8350S-AZ Transient Response with JP2 = RC (12VIN and 12VOUT 2.5A to 0A)

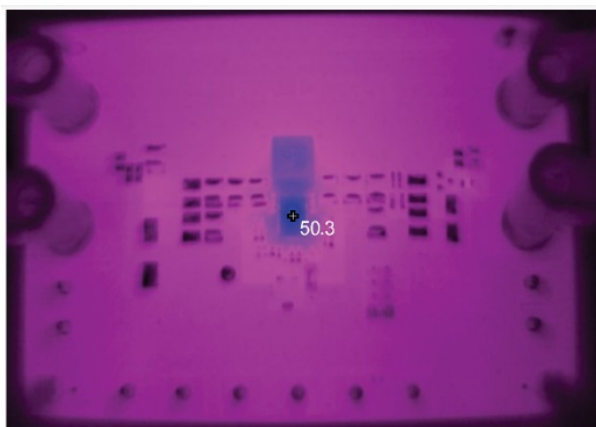


Figure 8. EVAL-LT8350S-AZ Thermals 12VIN to 12VOUT 2.5A with SSFM ON





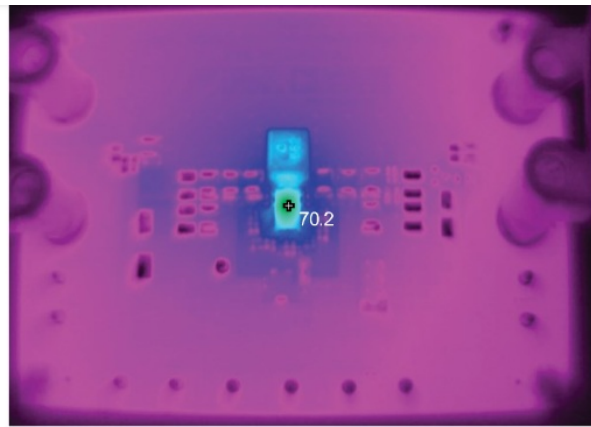


Figure 9. EVAL-LT8350S-AZ Thermals, Worst Case (4-Switch Operation) 9.5VIN to 12VOUT 2.5A with SSFM ON



$$f_{SW} = 2\text{MHz}$$

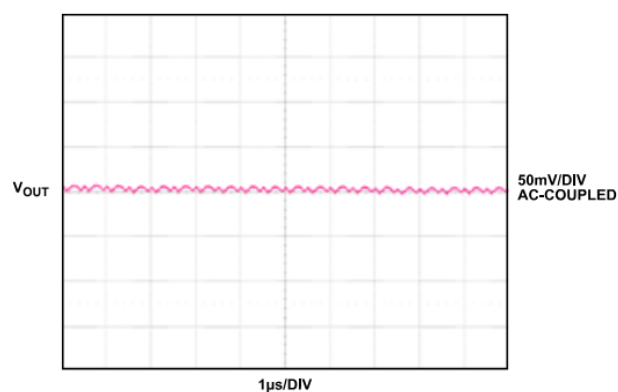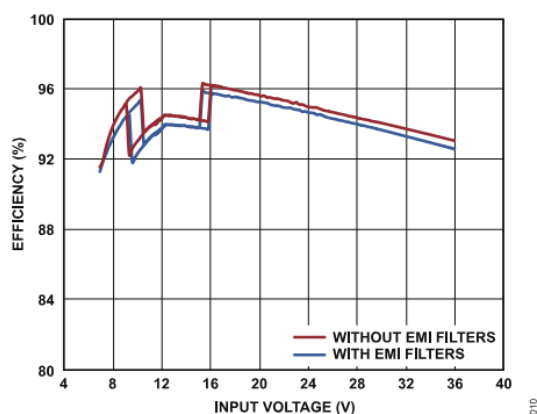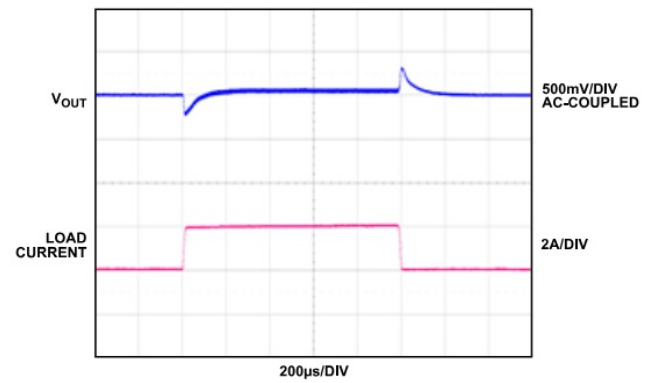

- Figure 10. EVAL-LT8350S-AZ Efficiency vs Input Voltage for 2A Load with SSFM
- Figure 11. EVAL-LT8350S-AZ Output Voltage Ripple at 12V Input Voltage and 2A Load

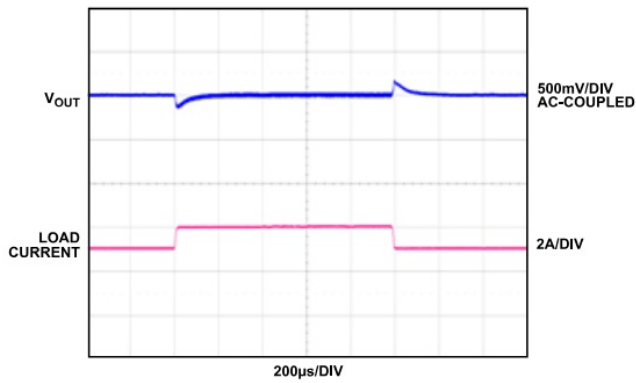

- Figure 12. EVAL-LT8350S-AZ Transient Response with JP2 = RC (12VIN and 12VOUT 2A to 1A)
- Figure 13. EVAL-LT8350S-AZ Transient Response with JP2 = RC (12VIN and 12VOUT 2A to 0A)

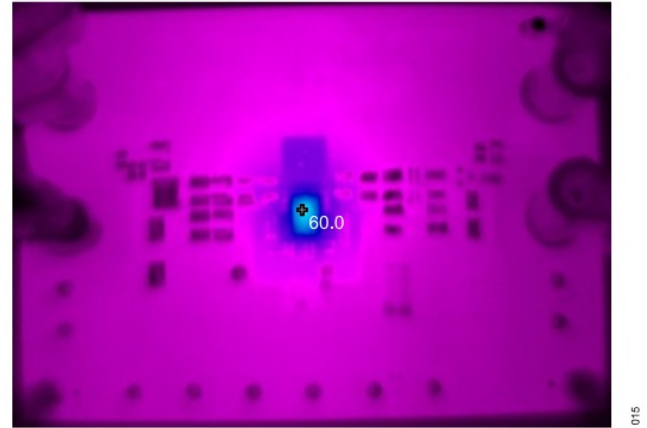
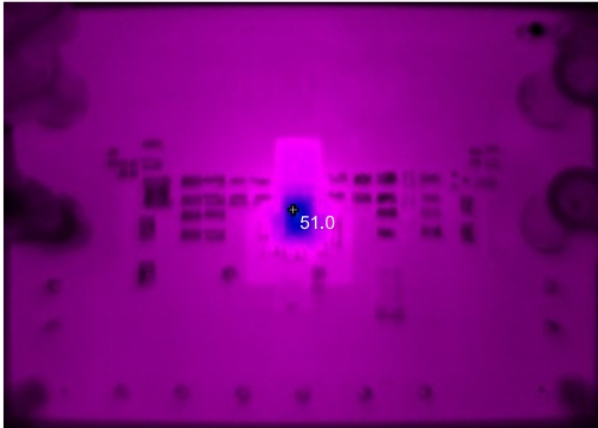


- Figure 14. EVAL-LT8350S-AZ Thermals 12VIN to 12VOUT 2A with SSFM ON
- Figure 15. EVAL-LT8350S-AZ Thermals, Worst Case (4-Switch Operation) 9.5VIN to 12VOUT 2A with SSFM ON


Load Current Injection for Faster Load Transient Response

- Load transient response can be improved with JP2 = RC + FF, called load current injection. The idea is to inject or feedforward load current to VC using ISMON and a voltage divider (VR1 and R17). With JP2 = RC + FF, the RC compensation, R5 and C6, is connected to ISMON through the voltage divider instead of GND. When the load current rises stepwise, ISMON rises immediately, and thus, VC is boosted faster compared to when the load current injection is not used (JP2 = RC). To determine the proper amount of load current injection, use the following Equation.

$$140 \times R1 \times \frac{R17}{VR1 + R17} = 1$$

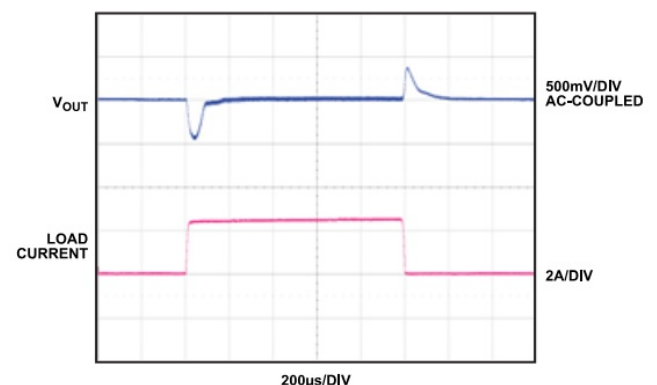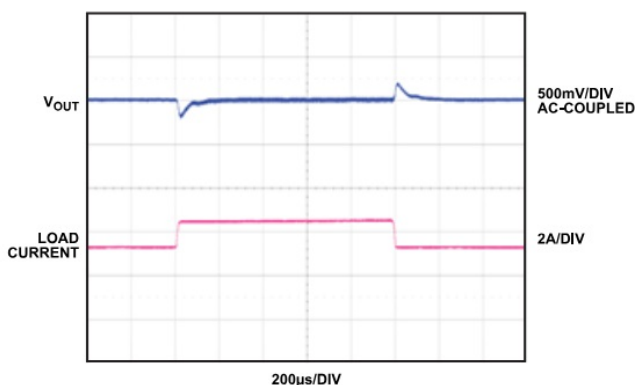


- Figure 16. EVAL-LT8350S-AZ Transient Response with JP2 = RC + FF (12VIN, 12VOUT, 2.5A to 1.25A)
- Figure 17. EVAL-LT8350S-AZ Transient Response with JP2 = RC + FF (12VIN, 12VOUT, 2.5A to 0A)

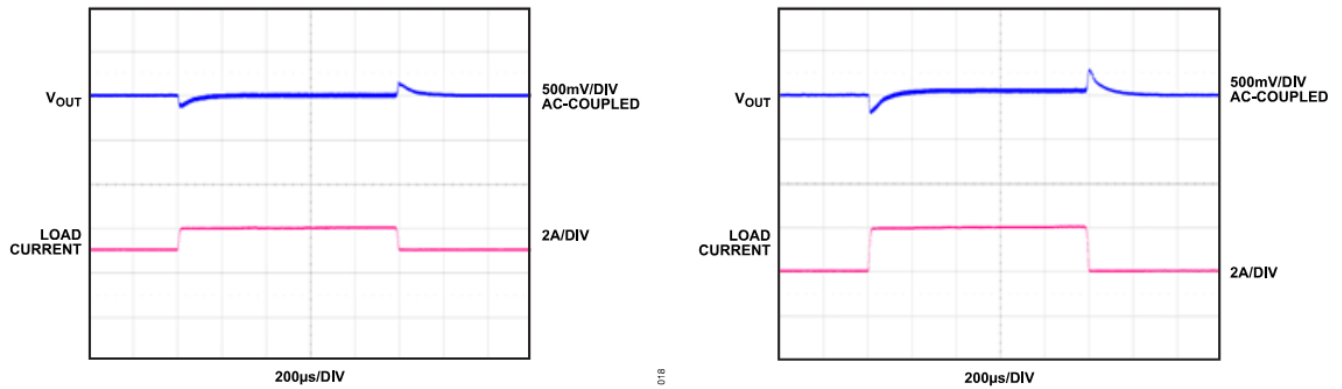


- Figure 18. EVAL-LT8350S-AZ Transient Response with JP2 = RC + FF (12VIN, 12VOUT, 2A to 1A)
- Figure 19. EVAL-LT8350S-AZ Transient Response with JP2 = RC + FF (12VIN, 12VOUT, 2A to 0A)

Electromagnetic Interference Result

$f_{SW} = 350\text{kHz}$

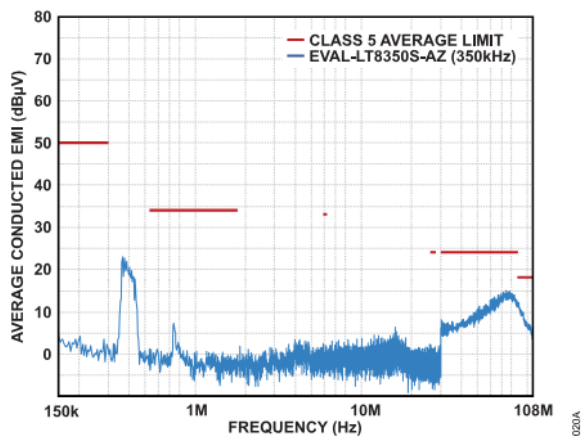


(a) CISPR25 Average, Voltage Method

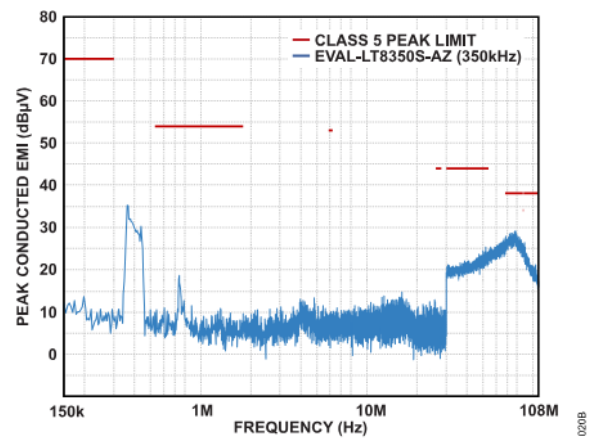


(b) CISPR25 Peak, Voltage Method

Figure 20. EVAL-LT8350S-AZ CISPR25 Voltage Conducted EMI Performance with 12VIN to 12VOUT at 2.5A, JP1 = DCM + SSFM

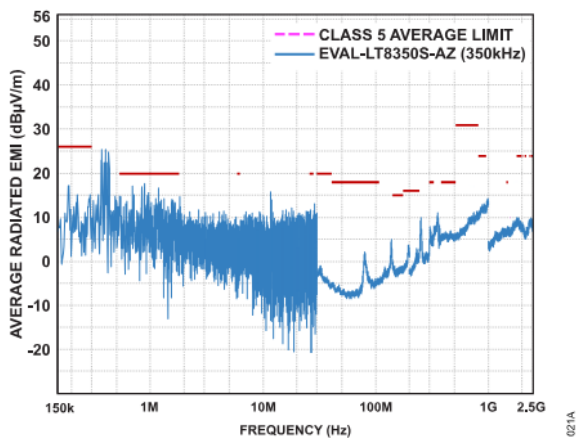


(a) CISPR25 Average, Radiated EMI

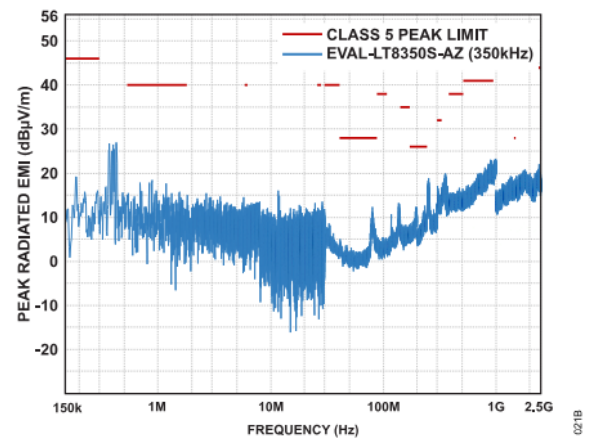


(b) CISPR25 Peak, Radiated EMI

Figure 21. EVAL-LT8350S-AZ CISPR25 Radiated EMI Performance with 12VIN to 12VOUT at 2.5A, JP1 = DCM + SSFM

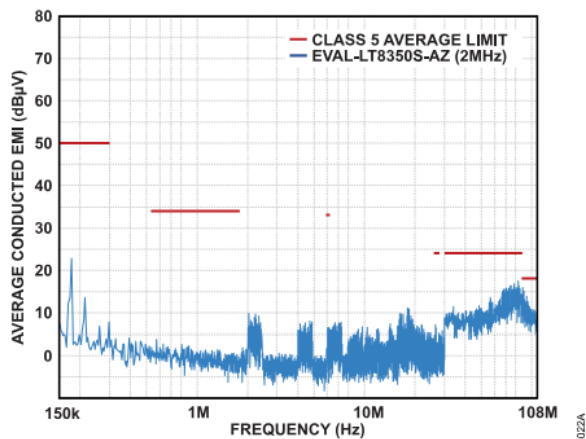


(a) CISPR25 Average, Voltage Method

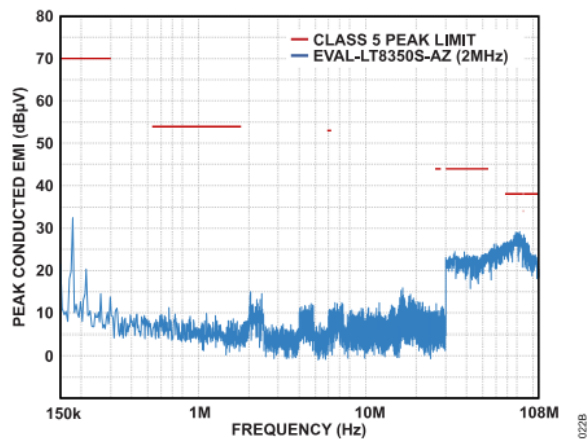


(b) CISPR25 Peak, Voltage Method

Figure 22. EVAL-LT8350S-AZ CISPR25 Voltage Conducted EMI Performance with 12VIN to 12VOUT at 2A, JP1 = DCM + SSFM

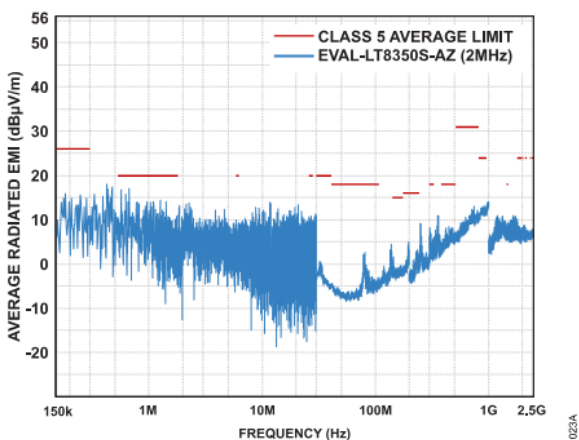

(a) CISPR25 Average, Radiated EMI

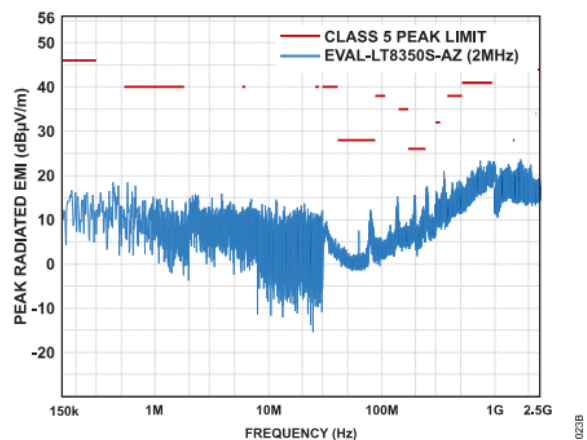

(b) CISPR25 Peak, Radiated EMI

Figure 23. EVAL-LT8350S-AZ CISPR25 Radiated EMI Performance with 12VIN to 12VOUT at 2.5A, JP1 = DCM + SSFM

Ordering Information

PART	TYPE
EVAL-LT8350S-AZ	Evaluation board

Evaluation Board Bill of Materials

QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
-----	-----------	------------------	--------------------------

DEFAULT ELECTRICAL COMPONENTS

2	C4, C17	CAP., 0.1µF, X7R, 50V, 10%, 0402, AEC-Q200	MURATA, GCM155R71H104KE02D
1	C3	CAP., 4.7µF, X5R, 10V, 20%, 0402, AEC-Q200	MURATA, GRT155R61A475ME13D
1	C5	CAP., 0.47µF, X7S, 10V, 10%, 0402, AEC-Q200	MURATA, GCM155C71A474KE36D
1	JP1	CONN., HDR, MALE, 2×4, 2mm, VERT, ST, TH T	WURTH ELECTRONIK, 6200082 1121
1	JP2	CONN., HDR, MALE, 1×3, 2mm, VERT, ST, TH T	WURTH ELEKTRONIK, 6200031 1121
1	R12	RES., 84.5kΩ, 1/16W, 0402, AEC-Q200	VISHAY, CRCW040284K5FKED
2	R13, R14	RES., 100kΩ, 1/16W, 0402, AEC-Q200	VISHAY, CRCW0402100KJNED
1	R22	RES., 110k, 0.5%, 1/16W, 0402, AEC-Q200	PANASONIC, ERJ-2RKD1103X
1	R3	RES., 10k, 1%, 1/10W, 0402, AEC-Q200	PANASONIC, ERJ-2RKF1002X
1	R7	RES., 402k, 1%, 1/10W, 0402, AEC-Q200	PANASONIC, ERJ-2RKF4023X
11	TP1, TP4–TP7, TP 9, TP12-TP14, TP1 6, TP17	TEST POINT, TURRET, 0.064" MTG. HOLE, P CB 0.062" THK	MILL-MAX, 2308-2-00-80-00-00-0 7-0
4	TP2, TP3, TP10, T P11	TEST POINT, BANANA JACK, 0.312" MTG. HO LE, PCB 0.203" THT	KEYSTONE ELECTRONICS, 575 -4
1	TP15	TEST POINT, TURRET, 0.094" MTG. HOLE, P CB 0.062" THK	MILL-MAX, 2501-2-00-80-00-00-0 7-0
1	U1	IC, BUCK-BOOST VOLTAGE REGULATOR, LQ FN-32	ANALOG DEVICES, LT8350SAV #WPBF
1	CONNECTOR	CONN., SHUNT, FEMALE, 2-POS, 2mm	WURTH ELEKTRONIK, 6080021 3421
1	STAND-OFF	STANDOFF, SELF-RETAINING SPACER, 12.7 MM LENGTH	WURTH ELEKTRONIK, 7029350 00

350kHz APPLICATION COMPONENTS (DEFAULT)

1	L1	IND., 6.8μH, PWR, SHIELDED, 20%, 9A, 20.80 mΩ, 6.56mm x 6.36mm, AEC-Q200, XAL6060	COILCRAFT INC., XAL6060-682 MEC
1	R4	RES., 143k, 1%, 1/16W, 0402, AEC-Q200	VISHAY, CRCW0402143KFKED
1	R5	RES., 12k, 1%, 1/10W, 0402, AEC-Q200	PANASONIC, ERJ2RKF1202X
1	C6	CAP., 4700pF, X7R, 50V, 10%, 0402, AEC-Q200	MURATA, GCM155R71H472KA37D
4	C10, C11, C22, C23	CAP., 10μF, X7S, 50V, 10%, 1210, AEC-Q200	MURATA, GCJ32EC71H106KA01
4	C7, C13, C16, C19	CAP., 22μF, X7R, 16V, 20%, 1210, AEC-Q200	TDK, CGA6P1X7R1C226K

2M Hz	APPLICATION COMPONENT	ENTS	
1	L1	IND., 2.2μH, PWR, SHIELDED, 20%, 12.1A, 4.8mΩ, 6.56mm x 6.36mm, AEC-Q200, XAL6060	COILCRAFT INC., XGL6060-222 MEC
1	R4	RES., 14.3k, 0.5%, 1/16W, 0402, AEC-Q200	
1	R20	RES., 0, 1/16W, 0402, AEC-Q200	
1	R5	RES., 30k, 1%, 1/16W, 0402, AEC-Q200	
1	C6	CAP., 680pF, X7R, 16V, 10%, 0402, AEC-Q200	
1	C25	CAP., 10pF, X7R, 25V, 10%, 0402, AEC-Q200	
4	C7, C10, C11, C22, C23	CAP., 10μF, X7S, 50V, 10%, 1210, AEC-Q200	MURATA, GCJ32EC71H106KA01


OPTIONAL LOW EMI COMPONENTS



1	L2	IND., 2.2 μ H, PWR, SHIELDED, 20%, 9.7A, 14.5m Ω , 5.48mm x 5.28mm, XAL5030, AEC-Q200	COILCRAFT INC., XAL5030-222 MEC
1	C12	CAP., 10 μ F, X7S, 50V, 10%, 1210, AEC-Q200	MURATA, GCJ32EC71H106KA01
1	C29	CAP., 4.7 μ F, X7R, 16V, 10%, 0805, AEC-Q200	MURATA, GCJ21BR71C475KA01 L
1	FB3	IND., 220 Ω AT 100MHz, FERRITE BEAD, 25%, 3A, 40m Ω , 0805, AEC-Q200	TDK, MPZ2012S221ATD25
4	C1, C2, C20, C21	CAP., OPTION, 1210	
2	C14, C28	CAP., OPTION, 0805	
2	FB1, FB2	IND., 220 Ω AT 100MHz, FERRITE BEAD, 25%, 3A, 40m Ω , 0805, AEC-Q200	TDK, MPZ2012S221ATD25
4	C26, C27, C32, C33	CAP., OPTION, 0402	

OPTIONAL ELECTRICAL COMPONENTS

1	R1	RES., 0.010 Ω , 1%, 1W, 0805 LONG-SIDE, AEC-Q200, CURRENT SENSE	SUSUMU CO, LTD., KRL2012E-M- R010-F-T5
2	R2, R10	RES., 0 Ω , 1/16W, 0402, AEC-Q200	VISHAY, CRCW04020000Z0EDHP
1	R17	RES., 3.01k, 1%, 1/10W, 0402, AEC-Q200	PANASONIC, ERJ-2RKF3011X
1	VR1	RES., 20k, 20%, 1/8W, SMD 3mm SQ, 1-TURN, TOP ADJ., TRIMPOT	BOURNS, 3313J-1-203E
8	R8, R9, R11, R15, R16, R18, R19	RES., OPTION, 0402	
1	M1	XSTR., OPTION, MOSFET, P-CH, SOT-23	
3	C15, C18, C25	CAP., OPTION, 0402	
1	C24	CAP., OPTION, ALUM POLY, SMD, 8.0mm x 10.0mm	
1	C30	CAP., OPTION, ALUM POLY, SMD, 5.0mm x 5.8mm, AEC-Q200	


Evaluation Board Schematic

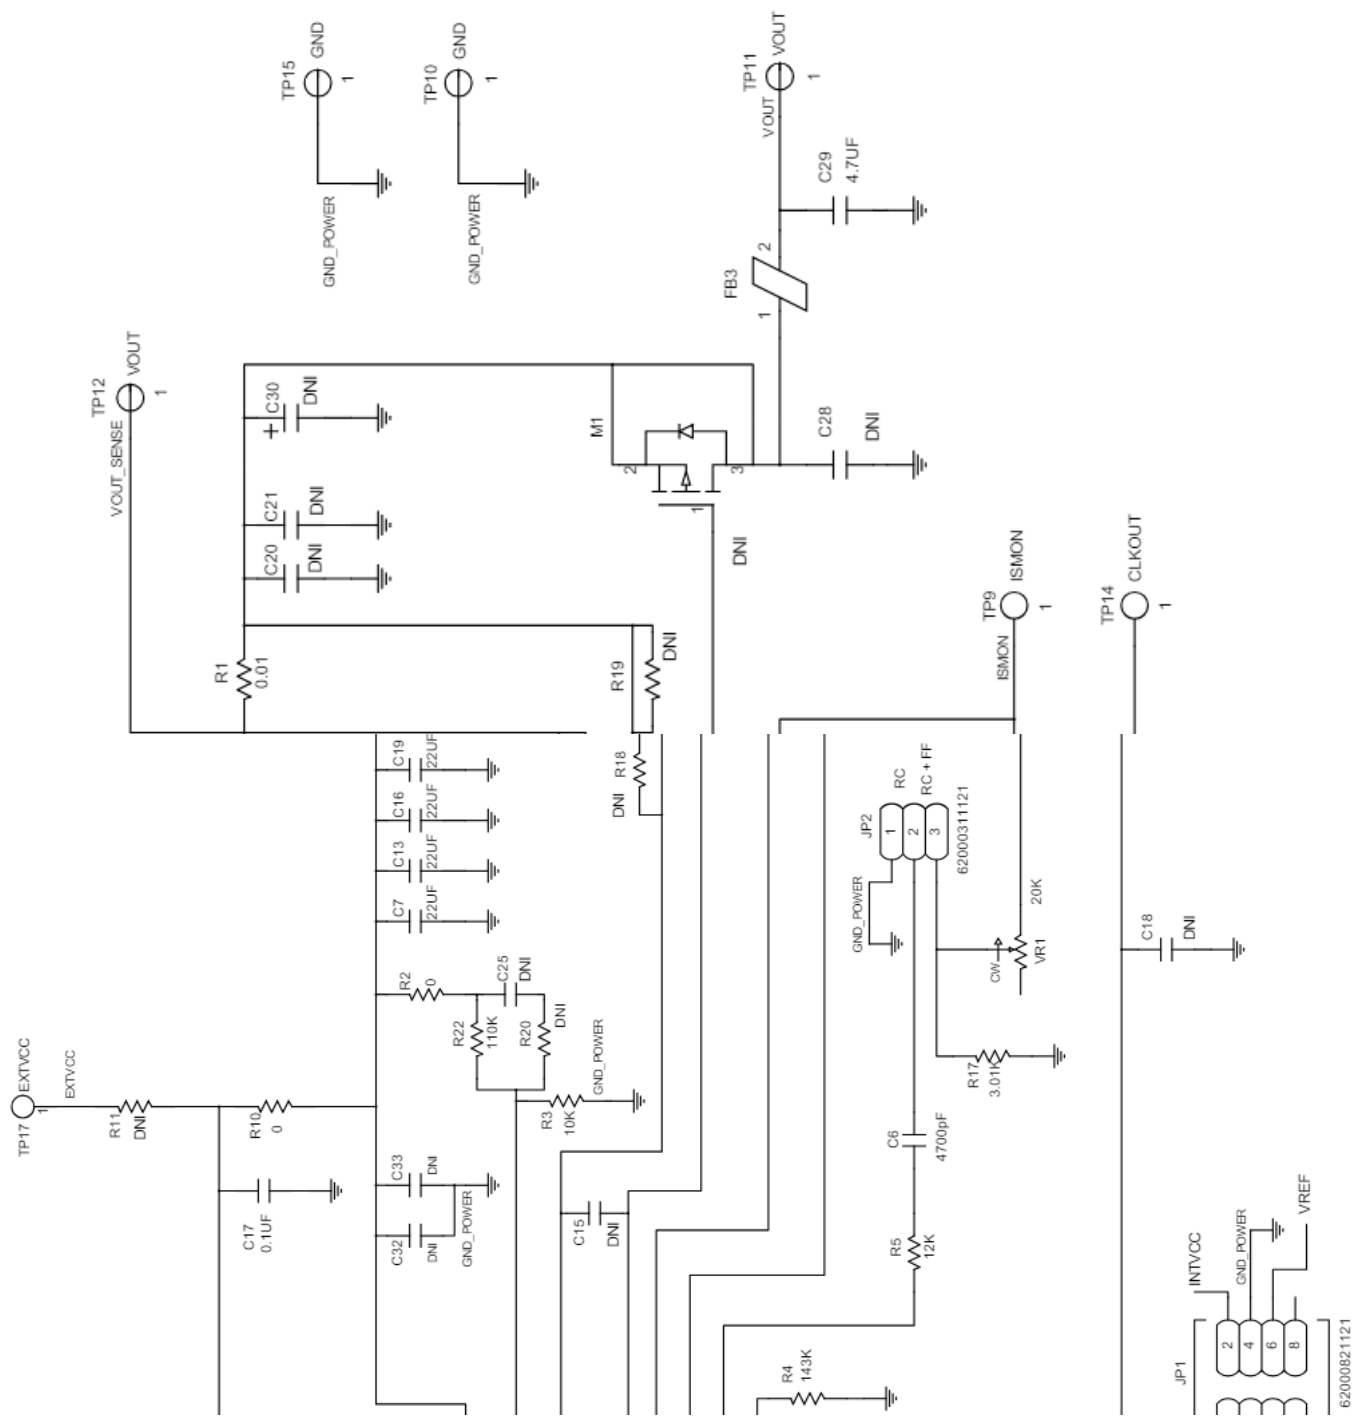

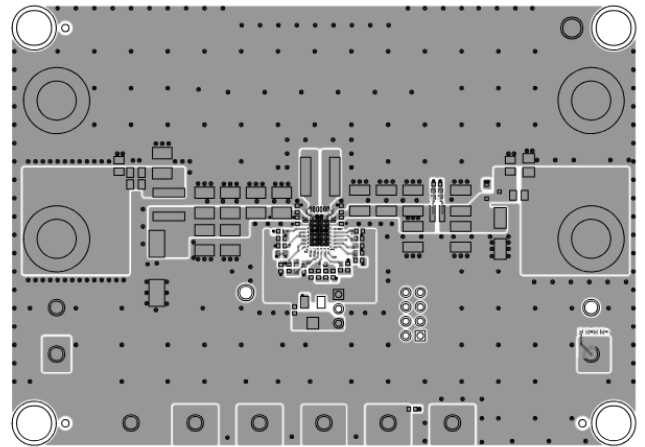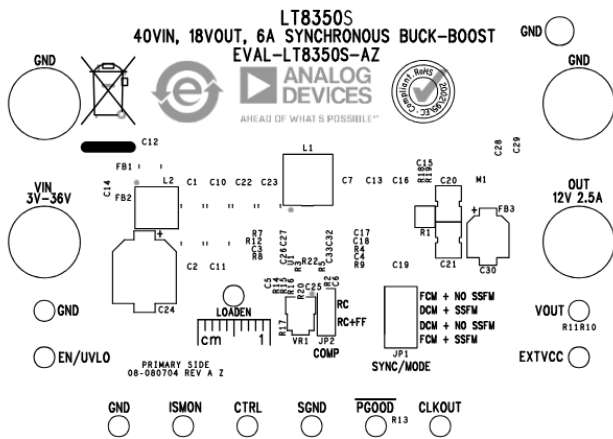


EVAL-LT8350S-AZ Component Placement Guide—Top
Silkscreen


EVAL-LT8350S-AZ PCB Layout—Top View

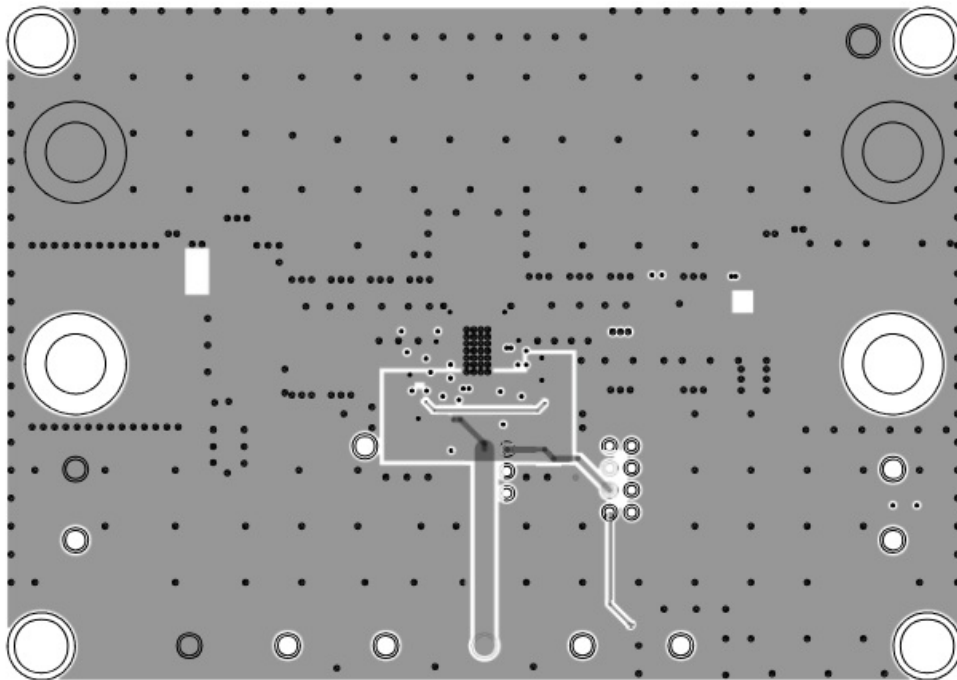

EVAL-LT8350S-AZ PCB Layout—Layer 2

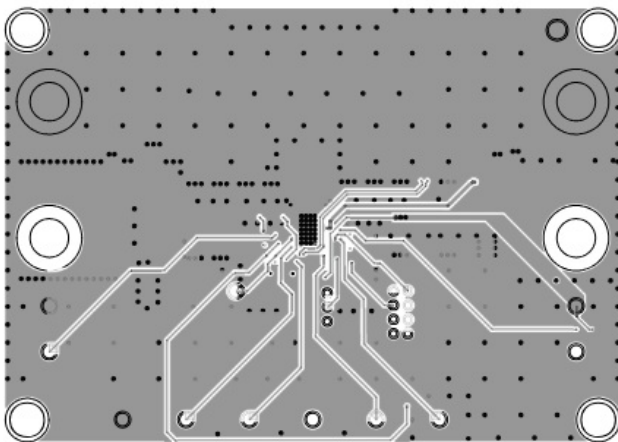

EVAL-LT8350S-AZ PCB Layout—Layer 3

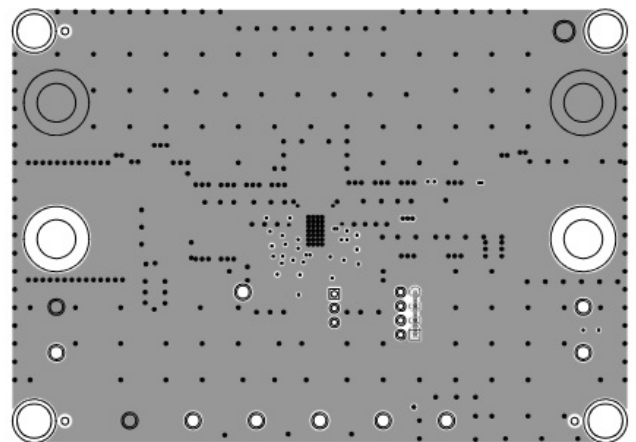

EVAL-LT8350S-AZ PCB Layout—Bottom View

Revision History


REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	04/24	Initial release	—

Notes

ASSUMED BY ANALOG DEVICES FOR ITS USE, NOR FOR ANY INFRINGEMENTS OF PATENTS OR OTHER RIGHTS OF THIRD PARTIES THAT MAY RESULT FROM ITS USE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. NO LICENCE, EITHER EXPRESSED OR IMPLIED, IS GRANTED UNDER ANY ADI PATENT RIGHT, COPYRIGHT, MASK WORK RIGHT, OR ANY OTHER ADI INTELLECTUAL PROPERTY RIGHT RELATING TO ANY COMBINATION, MACHINE, OR PROCESS WHICH ADI PRODUCTS ALL INFORMATION CONTAINED HEREIN IS PROVIDED “AS IS” WITHOUT REPRESENTATION OR WARRANTY. NO RESPONSIBILITY IS OR SERVICES ARE USED. TRADEMARKS AND REGISTERED TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS.

analog.com

Documents / Resources

	<p>ANALOG DEVICES LT8350S Evaluation Board [pdf] User Guide LT8350S Evaluation Board, LT8350S, Evaluation Board, Board</p>
--	--

References

- ▶ [Mixed-signal and digital signal processing ICs | Analog Devices](#)
- 🌐 [Document Feedback Form | Analog Devices](#)
- ▶ [Product Evaluation Boards and Kits | Analog Devices](#)
- ▶ [Mixed-signal and digital signal processing ICs | Analog Devices](#)
- [User Manual](#)

[Manuals+](#). [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.