

18 cu. ft. Top Freezer Refrigerator

- 17.5 cu. ft. Capacity
- Reversible Door
- Smart Inverter Compressor
- Crisper Drawer
- Optional Ice Maker - LK50C
- Garage Ready



COLOR AVAILABILITY

☒ LT18S2100S – PrintProof® Stainless Steel

☐ LT18S2100W – White

CAPACITY

Refrigerator (cu. ft.) 13

Freezer (cu. ft.) 4.5

Total Capacity (cu. ft.) 17.5

ENERGY

Energy Consumption (kWh/Year) 344

ENERGY STAR® Certified Yes

WATER & ICE SYSTEM

Ice & Water Dispenser No

Ice System Manual Ice Tray or Optional Ice Maker

Daily Ice Production (lbs.) 2.2 lbs.

Ice Storage Capacity (lbs.) 6.6 lbs.

COOLING

Compressor Type Smart Inverter Compressor

Dual Evaporators No

Multi-Air Flow System Yes

Door Cooling+ No

Temperature Sensors 1

Fresh Air Filter No

CONVENIENCE

Display Type Knob Dial

Temperature Controls Electronic / Manual

Door Alarm No

Child Lock No

Auto Closing Door Hinge No

ADA Compliant No

Sabbath Mode No

LoDecibel® Quiet Operation Yes

REFRIGERATOR

No. of Shelves 2 Full Width (Fixed)

Shelf Construction Tempered Glass

Crisper Bins 1

Glide N' Serve® Pantry Drawer No

Cool Guard No

Refrigerator Light Ceiling LED

REFRIGERATOR DOOR

No. of Door Bins 3 (2 Gallon, 1 Half Gallon)

Door Bin Construction 1-Piece (Clear)

FREEZER

Freezer Type Swing Door

No. of Shelves 1 Adjustable Glass Shelf

No. of Door Bins 2 Full Width (Clear)

Ice Storage Manual Ice Tray or Optional Ice Maker

Freezer Light No

Freezer Handle Pocket Handle

SMART FEATURES

Wi-Fi Enabled No

ThinQ® Technology No

SmartDiagnosis™ No

MATERIALS AND FINISHES

Hidden Hinges Yes

Surface Smooth

Fingerprint & Smudge Resistant Exterior LT18S2100S Only

Handles Pocket Handle

ACCESSORIES

Optional Ice Maker LK50C

TECHNICAL SPECS

Required Power Supply 115 V, 60 Hz, 15 Amp

Plug Type 3-Prong

Power Cord Location Back



DIMENSIONS / CLEARANCES / WEIGHTS

Depth with Handles	33 1/2"
Depth without Handles	33 3/4"
Depth without Door	29 3/4"
Depth (Total with Door Open)	58 1/4"
Height to Top of Case	64"
Height to Top of Door Hinge	65"
Width	27 1/2"
Width (Door Open 90° with Handle)	29 1/4"
Width (Door Open 90° without Handle)	29 1/4"
Door Edge Clearance with Handle	1 3/4"
Door Edge Clearance without Handle	1 3/4"
Installation Clearance	Sides 2", Top 2", Back 2"
Approx. Weight (Product / Carton)	161 lbs. / 174.2 lbs.
Carton Dimensions (WxHxD)	28 3/4" x 67 1/2" x 28 3/4"

LIMITED WARRANTY

Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear/Inverter Compressor (Parts Only)	6-10 Years

DIMENSIONS / CLEARANCES

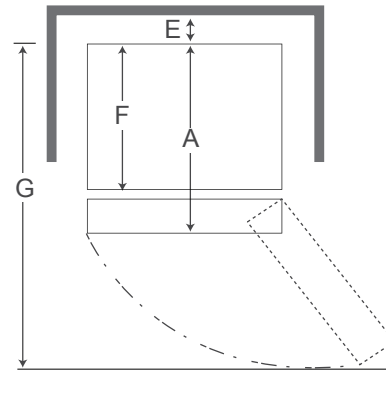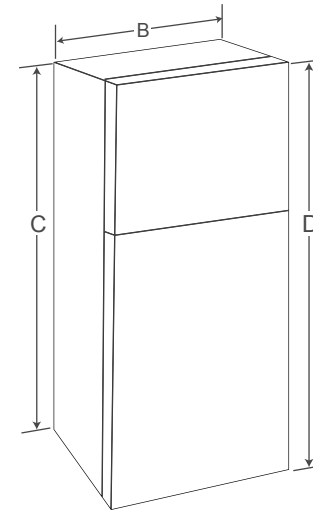

DIMENSIONS / CLEARANCES

A	Depth without Handle	33 3/4" (858.5 mm)
B	Width	27 1/2" (700 mm)
C	Height to Top of Case	64" (1625 mm)
D	Height to Top of Hinge	65" (1650 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	29 3/4" (757.5 mm)
G	Depth (Total with Door Open 90°)	58 1/4" (1481.5 mm)

INSTALLATION NOTES

- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 2 inches (50.8mm) between the back of the refrigerator and the wall.