


Assembly Instructions 1/2

IMPORTANT

- Use a soft cloth between these parts and the floor.
- Do not use power tools above 8 volts to assemble.
- Do not tighten all the bolts until each part is properly assembled.
- The unit must be level to work properly. Use the included adjustable levelers to level.
- Keep Wrench as the bolts may need to be tightened in the future.

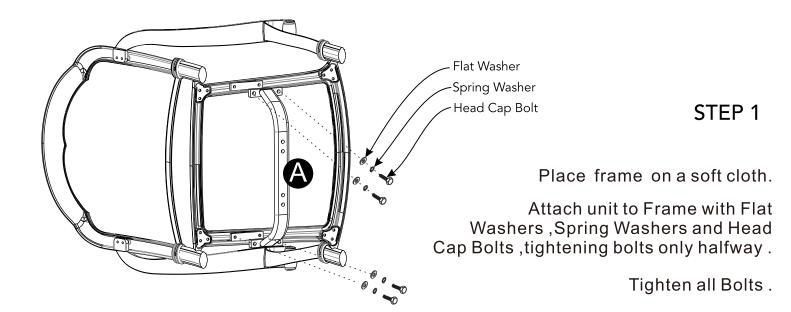

Assembly Instructions 2/2

STEP 2

Attach unit to Connerctor (B) with Bolts, Flat Washers, Spring Washers and Nuts, tightening bolts and nuts only haflway. (See Figure 1)

Tighten all Bolts and Nuts.


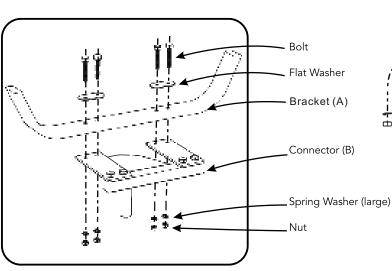


Figure 1



Place unit onto Base (C).

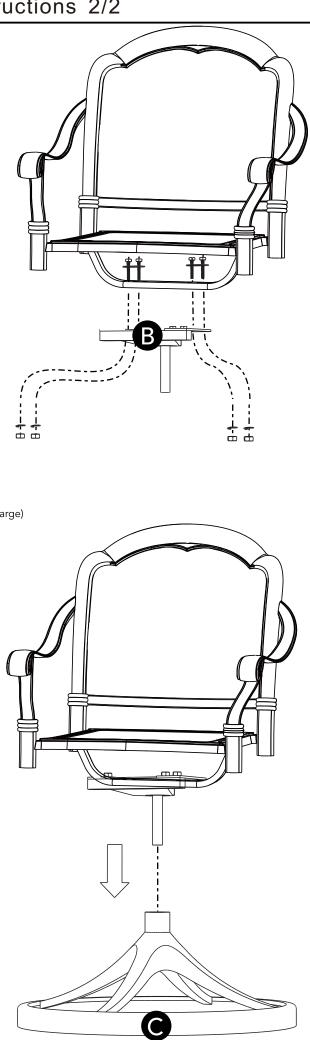

ASSEMBLY INSTRUCTION


Note:


- 1.Before fixing all screws, tighten each screw to 50% using an Allen wrench instead of an electric drill.
 If any screws are fully tightened during assembly, it is likely that the others will not align with their respective holes. Additionally, the holes are intentionally designed to be relatively larger to allow for adjustment of the screws.
- 2.Place the item on a flat surface to ensure stability during adjustment.
- 3. Gradually tighten all screws using appropriate tools.
- 4.If screws are not aligned with their respective holes during assembly, loosen all other screws to 50% and then continue the assembly process.
- 5.If the item is unstable, loosen all screws, adjust it on a flat surface, and then retighten all screws.


Hardware Fittings


Item No.	Reference Image	Description	Oty.	Extra Spare Parts Oty
À	0	screw M6*16	20	i
	0	washer M6	20	1

Item No.	Reference Image	Description	Oty.	Extra Spare Parts Sty
0		all les key Mb	1	1
0	8	foot pads	4	1.

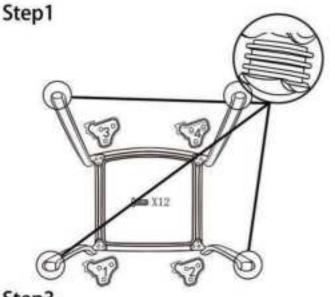

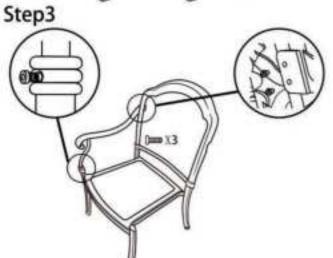

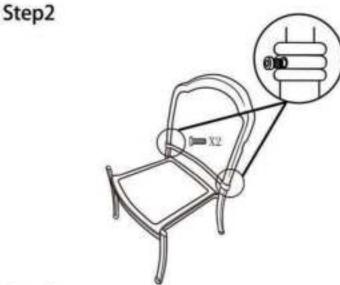

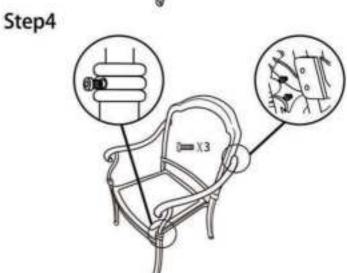

ASSEMBLY INSTRUCTION

Note:

- 1.Before fixing all screws, tighten each screw to 50% using an Allen wrench instead of an electric drill.
 If any screws are fully tightened during assembly, it is likely that the others will not align with their respective holes. Additionally, the holes are intentionally designed to be relatively larger to allow for adjustment of the screws.
- 2.Place the item on a flat surface to ensure stability during adjustment.
- Gradually tighten all screws using appropriate tools.
- 4.If screws are not aligned with their respective holes during assembly, loosen all other screws to 50% and then continue the assembly process.
- If the item is unstable, loosen all screws, adjust it on a flat surface, and then retighten all screws.

Hardware Fittings

Item No.	Reference Image	Description	Qty.	Extra Spare Parts Oty
Ä.	0	acrew M6*25	12	1
85	0	masher Mo*16	12	1
0	2	saring waster 96	12	£.
D		at lan key Mt	T.	t
t	()m	Adjustable fact page	4	1:
F				

Item No.	Reference Image	Description	Qty.	Extra Spare Farts Gty.
Ü.				
. #				
125				
a				
6				

