

# ORBIT



## Product Manual

# Table of Contents

- System Overview.....3**
  - Scope..... 3
  - Introduction..... 4
  - Definition.....5
- Setup.....6**
  - Software..... 6
  - Hardware..... 7
- Operation..... 9**
  - Om m o Service ..... 9
  - Om m o Service UI..... 11
  - Om m o App ..... 12
  - Base Station LED Behavior..... 14
  - Base Station LED Behavior From V5004..... 14
  - SIU LED Behavior..... 15
  - SIU LED Firmware From V5004..... 15
  - Base Station LED Behavior Prior to V5004..... 16
  - SIU LED Firm ware Prior to V5004..... 17
- Connecting Sensor Device and SIU..... 18**
  - Micro SD Connection Sensors + SIU..... 19
  - Mezzanine Connection Sensors + SIU.....21
  - JST Connection Sensors + SIU (Legacy Product) .....23
  - Mini Wireless.....26
- Troubleshooting/ FAQs..... 28**
- Disclaimers/ Legal.....33**


# System Overview

## Scope

- The Orbit Base Station is the only certified component referenced in this product manual; however, base station product functionality cannot be described without considering other system components.
- All sensors, SIUs, receivers and other Ommo Devices described in this document are pre-production, pre-certification prototype units.
- Certified Sensors & SIUs are forthcoming and will come with their own updated product manual.

# Introduction

- **ORBIT** is a permanent magnet-based 3D tracking system that outputs 6 degrees-of-freedom information (position & orientation) for each sensor device within its tracking volume, with submillimeter precision and accuracy
- The sensor devices can be embedded in tools of various form factors using our standard hardware or in a custom hardware design, using our reference designs and guidelines.

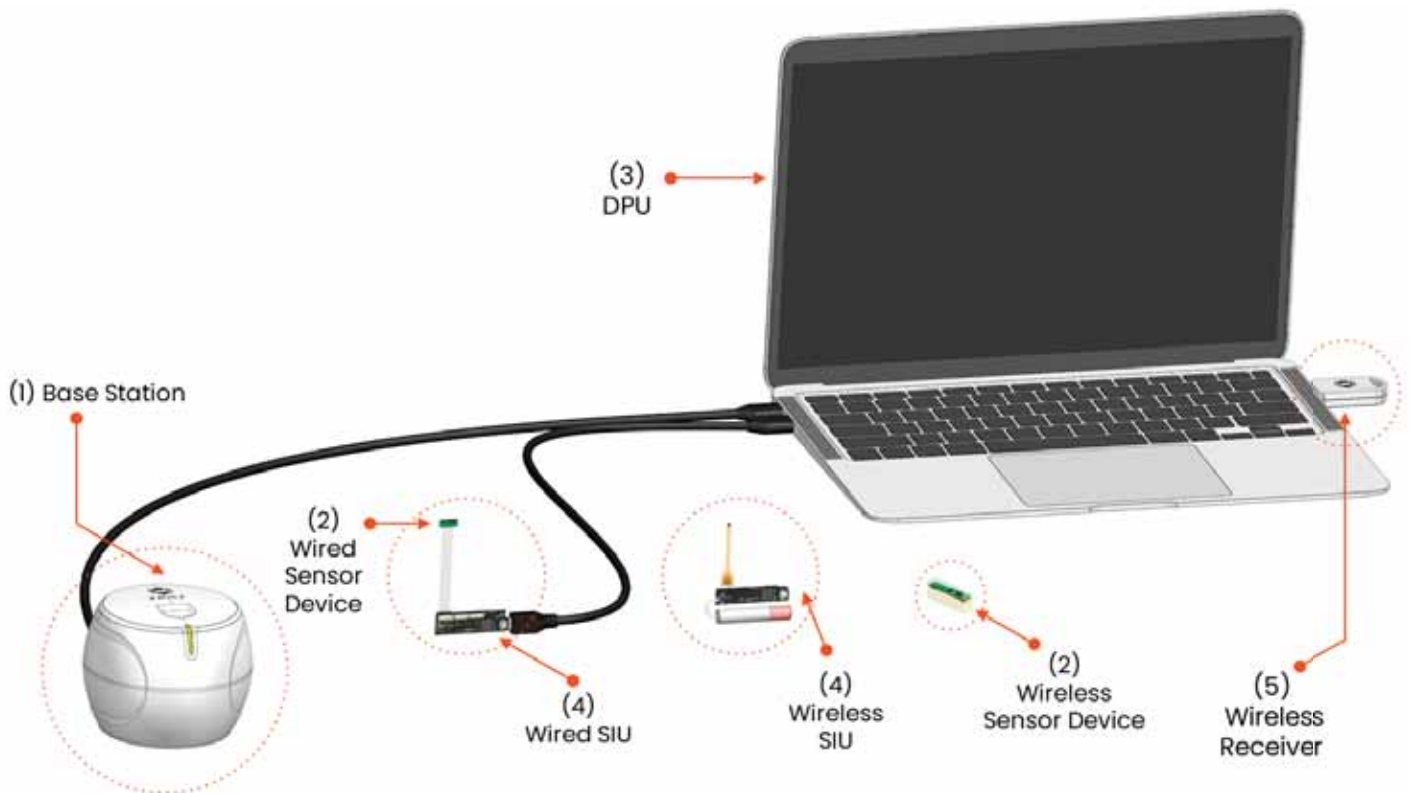

**Note: Refer to the next page for the definition of products shown above**

## Definition

1. **BASESTATION** is an unique magnetic signal source based on Om mo's patented permanent magnet mechanism . It is the origin of tracking coordinate system
2. **SENSOR DEVICE** consists one or more tracking units<sup>\*</sup>
  - 2- 1. **TRACKING UNIT** is a construction where a set of N sensors, such as magnetometer and inertial measurement unit, are coupled to a rigid body. Each tracking unit produces a single, independent 3D point of measurement that corresponds to one computed output
3. **DATA PROCESSING UNIT** (DPU) is a computer that runs Om mo Service process that manages and communicates with hardwares and provides the client API. DPU is supplied by customers
4. **SENSOR- DEVICE INTERFACE UNIT** (SIU) samples, synchronizes, and transmits sensor device data to the data processing unit via wired or wireless connection.
5. **WIRELESS RECEIVER** (dongle) plugs into a DPU and receives wireless data from SIU(s) which are then processed by Om mo Service. One dongle can support multiple wireless SIUs simultaneously and many dongles can be used at a time to further increase the total number of wireless devices

<sup>\*</sup>Currently, all of Om mo's sensor devices have 1tracking unit. Future products may include flexible sensor devices with multiple tracking units

Note: Refer to the "Product Guide" for more detailed information on the current product offerings at Om mo


# Setup

**Note: OmMo system runs on Windows 10 and above. For battery- operated computers, ensure that the power cord is plugged in for computing power.**

## Software

**Step 1** | Download the zip file (i.e omMo\_eval\_sdk.zip) from your google drive folder (OmMo Pilot Software & Documentation > SDK) or directly provided by OmMo

**Step 2** | Unzip the file and save it to a directory of your choice. Folder structure should look as shown below

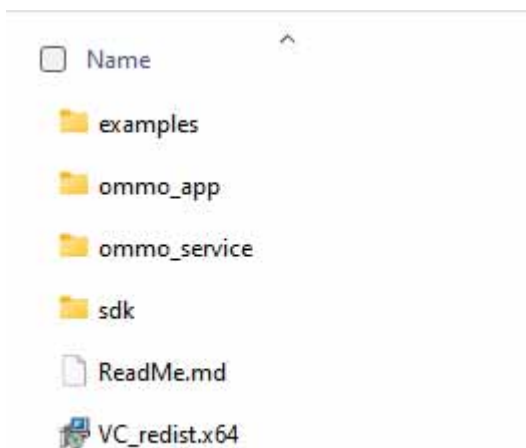


## Hardware

**Note:** Make sure your base station is *NOT sitting on ferrous metals* and that the tracking space is free from large ferrous objects.

**NOTE:** Starting with firm ware V5004, the LED behavior of the base station and SIU has changed to comply with IEC 60601-1 guideline for indicator lights. The LED behavior is explained [here](#). To check the firm ware version, refer to the troubleshooting/ FAQ section [here](#)

**Step 1** | Unbox the kit that includes a base station and a custom USB- C to USB- A cable

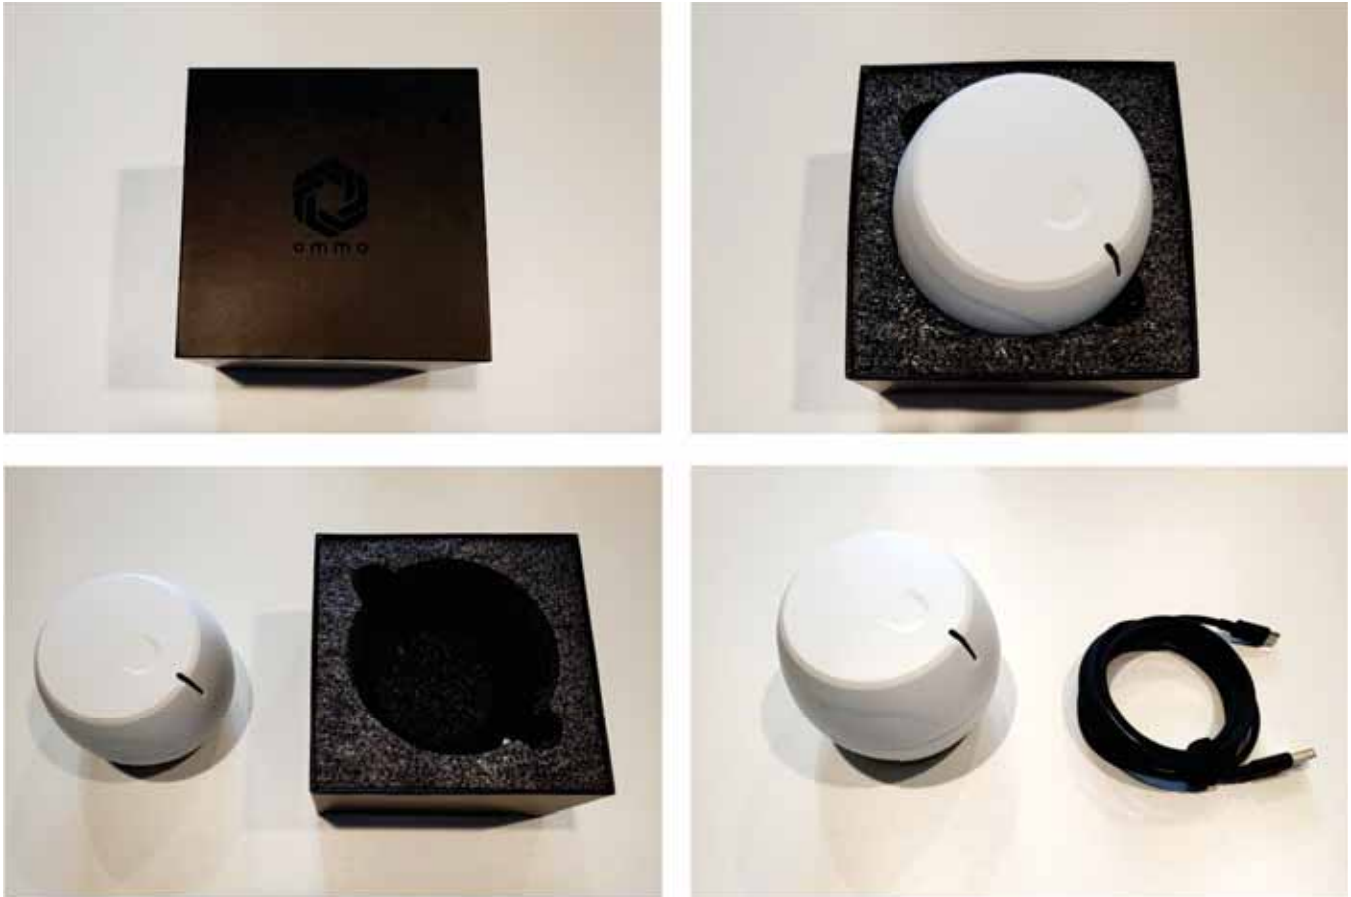

**Step 2** | Plug USB- C into the **base station** and connect to the **DPU** (computer)



**Note:** The base station LED will show white with the firm ware version starting with V5004 and will show blue with a firm ware version before V5004. Refer to to the LED Behavior for the base station [here](#)

**Step 3** | Connect **sensor device(s)** and **SIU(s)** to **DPU**

- Refer to the respective sensor device and sensor device interface unit (SIU) [here](#)


Set up is now complete. Move to the next Section “Operation” to start tracking sensor devices



# Operation

## Om m o Service


**Step 1** | Navigate to Om m o Service folder inside the SDK folder

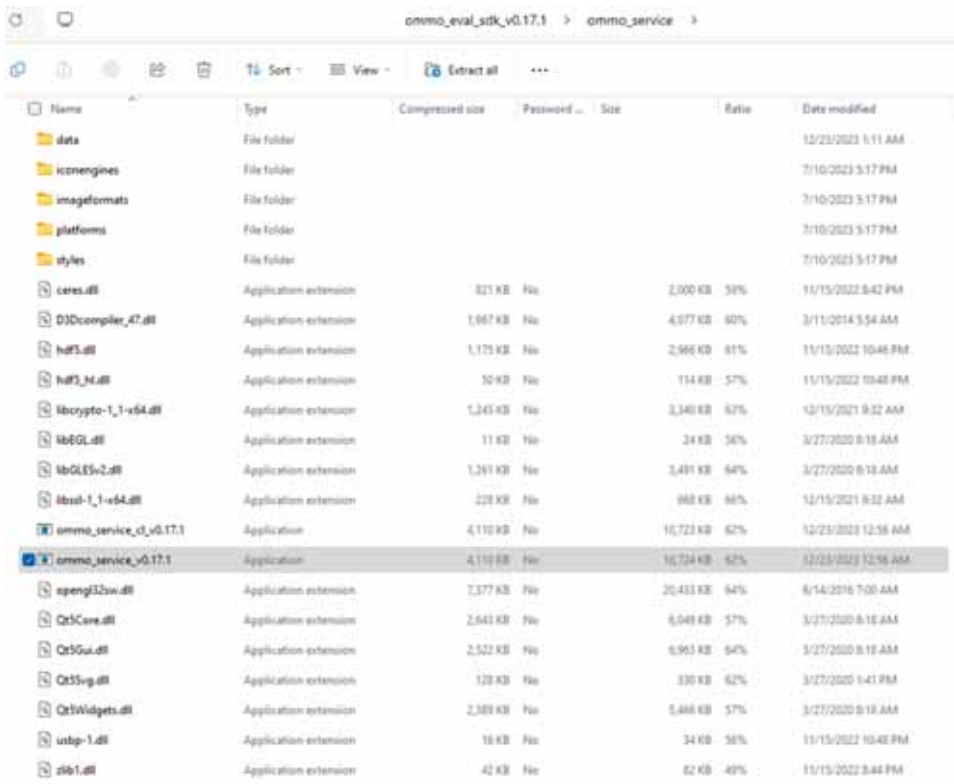

Name	Type	Compressed size	Password ...	Size	Ratio	Date modified
data	File folder					12/23/2023 1:11 AM
iconengines	File folder					7/10/2023 5:17 PM
imageformats	File folder					7/10/2023 5:17 PM
platforms	File folder					7/10/2023 5:17 PM
styles	File folder					7/10/2023 5:17 PM
ceres.dll	Application extension	821 KB	No	2,000 KB	58%	11/15/2022 8:42 PM
D3DCompiler_47.dll	Application extension	1,667 KB	No	4,077 KB	60%	3/11/2014 5:54 AM
hdf5.dll	Application extension	1,175 KB	No	2,966 KB	61%	11/15/2022 10:48 PM
hdf5_h.dll	Application extension	50 KB	No	114 KB	57%	11/15/2022 10:48 PM
libcrypto-1_1-x64.dll	Application extension	1,345 KB	No	3,340 KB	67%	12/15/2021 9:32 AM
libGL.dll	Application extension	11 KB	No	24 KB	56%	3/27/2020 8:18 AM
libGLEW-2.dll	Application extension	1,261 KB	No	3,491 KB	64%	3/27/2020 8:18 AM
libssl-1_1-x64.dll	Application extension	228 KB	No	668 KB	66%	12/15/2021 9:32 AM
ommo_service_v0.17.1	Application	4,110 KB	No	10,723 KB	62%	12/23/2023 12:56 AM
ommo_service_v0.17.1	Application	4,110 KB	No	10,724 KB	62%	12/23/2023 12:56 AM
opengl32u.dll	Application extension	7,377 KB	No	20,433 KB	64%	6/14/2016 7:00 AM
Qt5Core.dll	Application extension	2,643 KB	No	6,049 KB	57%	3/27/2020 8:18 AM
Qt5Gui.dll	Application extension	2,522 KB	No	6,963 KB	64%	3/27/2020 8:18 AM
Qt5Svg.dll	Application extension	128 KB	No	330 KB	62%	3/27/2020 8:41 PM
Qt5Widgets.dll	Application extension	2,389 KB	No	5,466 KB	57%	3/27/2020 8:18 AM
usbip-1.dll	Application extension	16 KB	No	34 KB	56%	11/15/2022 10:48 PM
zlib-1.dll	Application extension	42 KB	No	82 KB	49%	11/15/2022 8:44 PM

**Step 2** | Launch “om m o\_service” application

- Use latest available version (v0.17.1or later)
- For the first time use,the following window may pop up .Click “More Info” and “Run Anyway”

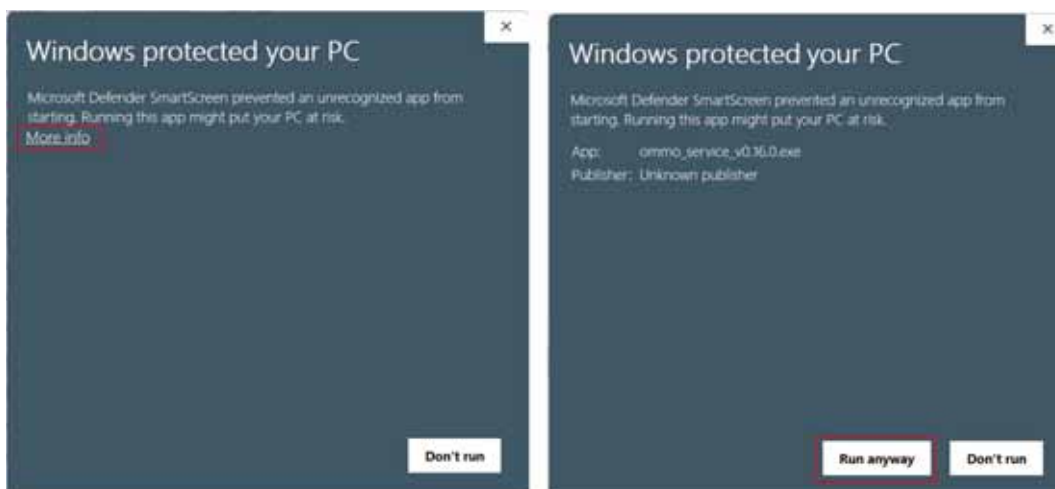

- A command window will open. Do not close the window during use

```

C:\Users\...> ommo_service v0.16.0, alg version v0.14.29-1
[2023-09-21 17:38:57.653] [Info] [main.cpp:main:225] [thread 24736] ommo_service version v0.16.0, alg version v0.14.29-1
[2023-09-21 17:38:58.124] [Info] [main.cpp:main:253] [thread 24736] Loading splash screen
[2023-09-21 17:38:58.200] [Info] [BatchedLogger.cpp:ommo::BatchedLogger::Start:33] [thread 24736] Creating logging thread
[2023-09-21 17:38:58.200] [Info] [ommoDataRouter.cpp:ommoDataRouter::Start:30] [thread 24736] Creating thread
[2023-09-21 17:38:58.200] [Info] [usbConnectionNotifier.cpp:usbConnectionNotifier::Start:59] [thread 24736] Creating USB
Notifier thread.
[2023-09-21 17:38:58.200] [Info] [usbConnectionNotifier.cpp:usbConnectionNotifier::RegisterWithOS:98] [thread 13740] Reg
istering for USB events.
[2023-09-21 17:38:58.218] [Info] [rpcOmMoServerManager.cpp:rpcOmMoServerManager::ServerThreadedFunction:121] [thread 191
84] Server listening on localhost:50051
[2023-09-21 17:38:58.218] [Info] [rpcGetConnectedDevicesServerCallData.cpp:rpcGetConnectedDevicesServerCallData::rpcGetC
onectedDevicesServerCallData:10] [thread 19184] CallData 8x1b85f0604f0 ready.
[2023-09-21 17:38:58.218] [Info] [rpcAddDataListenerServerCallData.cpp:rpcAddDataListenerServerCallData::rpcAddDataListe
nerServerCallData:10] [thread 19184] CallData 8x1b85f0604f0 ready.
[2023-09-21 17:38:58.218] [Info] [rpcAddDeviceChangeListenerServerCallData.cpp:rpcAddDeviceChangeListenerServerC
allData:12] [thread 19184] CallData 8x1b85f0604f0 ready.
[2023-09-21 17:38:58.218] [Info] [rpcOpenDataFrameListenerServerCallData.cpp:rpcOpenDataFrameListenerServerCallData:14] [thread 19184] CallData 8x1b85f0604f0 ready.

```

- Om mo Service will open and **base station** LED will turn green (for ~V5004)/blue (for V5004~) while the unit is starting and being set up
- SIU(s) and base station will stay (for ~V5004)/blue (for V5004~) until data is requested by Om mo App or client app

**Note:** Refer to the **LED Behavior for base station** [here](#)

## OmMo Service UI

You can check the list of connected and disconnected devices using the OmMo Service UI.

**Step 1** | Click on the OmMo icon on the right side of the Window task bar

- If the icon is not shown, click on the arrow button to show the hidden icons




- You can see the status of OmMo Service and connected hardware devices

**Step 2** | Click on “Error Details” on the OmMo Service status box to see the details of the warnings/errors on OmMo Service

**Step 3** | Click on the box of the running device you want to check. and click on “Error Details” to see the details of the warning/errors on the device


In this example, you can see the detailed information about the SIU. You can also see that there’s a sensor connected on Port 2 of the SIU, with Fusion mode disabled.

**Note:** If there’s a critical error with the device connected, UI will show “Error” instead of “Running”

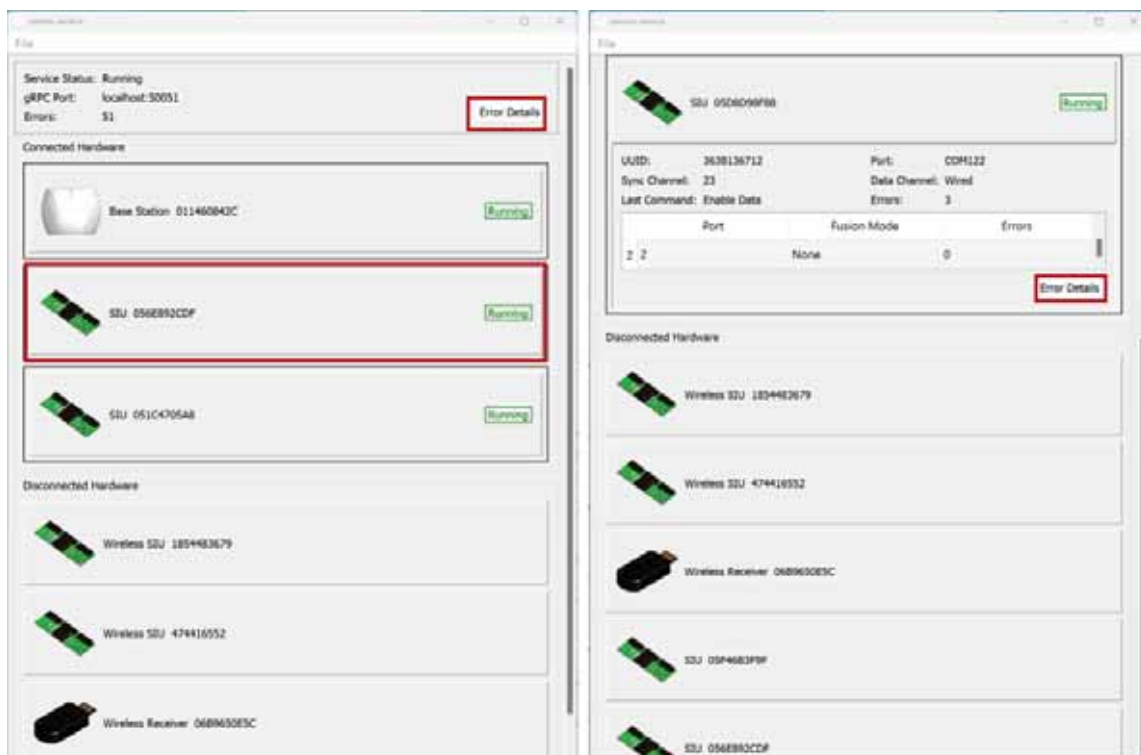


## Step 1| Launch Om m o App

**Note:** For more detailed information on the software, refer to “Om mo App User Guide”

Name	Status	Date modified	Type	Size
data	✓	9/21/2023 5:32 PM	File folder	
fmod.dll	✓	9/21/2023 5:32 PM	Application extens...	1,784 KB
fmodL.dll	✓	9/21/2023 5:32 PM	Application extens...	1,994 KB
FreeImage.dll	✓	9/21/2023 5:32 PM	Application extens...	6,780 KB
hdf5.dll	✓	9/21/2023 5:32 PM	Application extens...	2,966 KB
libcrypto-1_1-x64.dll	✓	9/21/2023 5:32 PM	Application extens...	3,340 KB
libssl-1_1-x64.dll	✓	9/21/2023 5:32 PM	Application extens...	668 KB
 ommoApp	✓	9/21/2023 5:32 PM	Application	8,478 KB
zlib1.dll	✓	9/21/2023 5:32 PM	Application extens...	82 KB

- Note: Refer to table for LED Behaviors of Base Station and SIU**



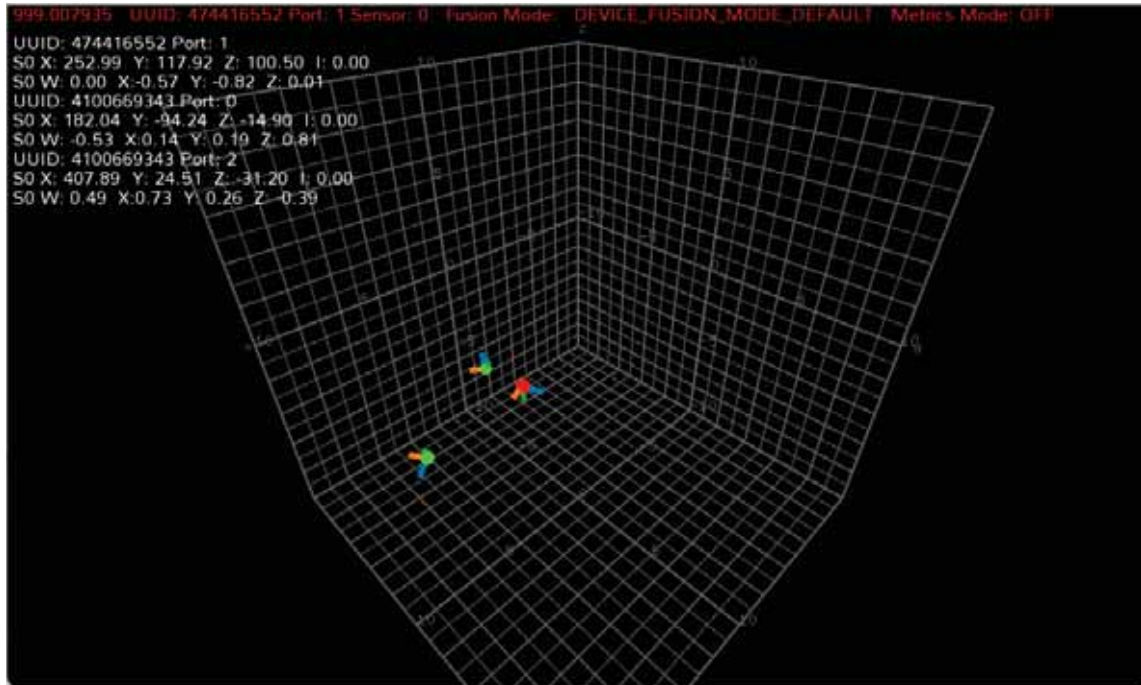


3D Tracking Screen is the first screen you see on Om m o App. This screen displays all connected devices and their associated sensors' real-time position and orientation information. The red line at the top shows the currently selected sensor's information (packet rate, SIU UUID, Port, Sensor # ) along with the available tracking and measurement modes.



When you are done tracking, close Om m o Service and the base station will stop running and the **LED** will return to blue (~v5004)/white (v5004~)







**NOTE:** Starting with Firm ware V5004, the LED behavior of the base station and SIU has changed to comply with IEC 60601-1 guideline for indicator lights. For devices with firm ware before V5004, refer to pages [here](#). To check the firm ware on the device, refer to [troubleshooting/ FAQ guide here](#)






## Base Station LED Behavior

Base Station LED Behavior From V5004		Status
Green Fade		Base station has reached its operation speed and is sending data to Omno Service
White		Idle Mode Base Station is powered on, magnet not spinning, USB Port Not Open
Dark Blue		Connected Standby Mode Base station is ready to receive commands from software. Base station will stay in this state until sensor device data has been requested by a client from the service (i.e starting Omno App). <b>If there is no sensor or SIUs attached, Omno Service will not start the base station.</b>
Purple		Base station has detected a new wireless SIU/ sensor device and is working to set the device up.
Orange Flash		Error Unrecoverable firm ware error/ hardware fault <b>Refer to <a href="#">Troubleshooting</a>.</b>

**NOTE: Pictures below do not fully capture the color of the LED. Colors look more vibrant and true to the colors listed.**

## SIU LED Behavior

SIU LED Firm ware From V5004		Status
Green Fade		SIU is operating normally and sending data Wired SIU: LED turns from Solid Green to Green Fade. Wireless SIU: Green Fade.
White		Idle Mode SIU is powered on. Connection to base station lost/ no base station found
Dark Blue		SIU is connected to Ommo Service via a wired connection and the port is opened. No data transmission at this stage (No sensors attached and set up cannot be completed; data has not been requested by Ommo App/client)
Purple		Wireless communication mode to base station SIU is setting up a wireless connection with the base station
Green Flash		No synchronization between the base station and SIU/sensor device. (No base station; base station is not running; base station synchronization signal is not received) If SIU is operating in wireless mode, losing synchronization for 0.5s will return SIU to discovery mode (Blue LED)
Orange Flash		Error Unrecoverable firm ware error/ hardware fault <a href="#">Refer to Troubleshooting</a>

Base Station LED Behavior Prior to V5004		Status
Blue, Fade		Base station is powered on
Green, Fade		Base Station is successfully connected to Om mo Service. Base Station is in idle/ set up state.  Base station will stay in this state until sensor device data has been requested by a client from the service (i.e starting Om mo App). <b>If there is no sensor or SIUs attached, service will not start the base station.</b>
White, Fade		Base station has reached its operation speed and is sending data to Om mo Service
Yellow, Solid		Base station has detected a new wireless SIU/ sensor device and is working to set the device up.
Red, Flash		Error Unrecoverable firm ware error/ hardware fault <b>Refer to <a href="#">Troubleshooting</a></b>



SIU LED Firm ware Prior to V5004		Status
Blue, Fade		Discovery Mode. Connection to base station lost/ no base station found; SIU is powered on and in idle state Wired: port not opened Wireless: wireless discovery to find a base station
Purple, Solid		Wireless communication mode to base station SIU is setting up wireless connection with the base station (corresponding base station LED is yellow)
White		Sending data normally Fade: wireless mode Solid: wired mode
Green, Fade		SIU is connected to Om mo Service via wired connection and port is opened. No data transmission at this stage (No sensors attached and set up cannot be completed; data has not been requested by Om mo App/ client)
Yellow, Flash		No synchronization between base station and SIU/ sensor device. (No base station; base station is not running; base station synchronization signal is not received) If SIU is operating in wireless mode, losing synchronization for 0.5s will return SIU back to discovery mode (blue LED)
Red, Flash	-	Error Unrecoverable firm ware error/ hardware fault <a href="#">Refer to Troubleshooting</a>

# Connecting Sensor Device and SIU

To understand which page of the guide to follow, refer to the item description included in the packing list.


There are 3 types wire connections offered by Ommo: Micro SD, Mezzanine, and JST.

The item description includes the connection. For example:

**MICRO SD CONNECTION:** 11528, ASM, MMC5983 **MICRO SD 6 C WITH SHIELD TPE 1.25M**

**MEZZANINE CONNECTION:** 12042, ASM, MMC5983 **MEZZANINE WITH 30MM JUMPER CABLE**

**JST CONNECTION:** 11573, ASM, MMC5983 + IMU, 8P **JST FUSION BOARD**



Ommo Technologies, Inc.

Packing list: SO-

Created: 2023-06-30

Customer:


Shipment deadline:

Bill to:

Ship to:

Items picked on

Tracking nr:




	Item	Quantity
1	[10224] 10224, BASE STATION KIT	1 pcs
2	[10208] 10208, ASM, SIU HOUSING ASSEMBLY FOR 10322 & MMC5983	1 pcs
3	[11528] 11528, ASM, SENSOR HOUSING ASSEMBLY FOR MMC5983 MICRO SD 6 CONDUCTOR WITH SHIELD TPE CABLE ASM 1.25M	4 pcs
4	[10535] 10535, OMMO CUSTOM USB-C TO USB-A CABLE, 2M	1 pcs

## Micro SD Connection Sensors + SIU



- Plug USB- C into the **SIU** and connect to the **DPU**
- Plug a Micro SD **sensor device** into the **SIU**. Follow the guidance feature (notch) on the sensor plug board for the correct side up (Top right picture)
- Repeat the process to connect multiple sensor devices

### New Micro SD SIU with Universal Plug Interface


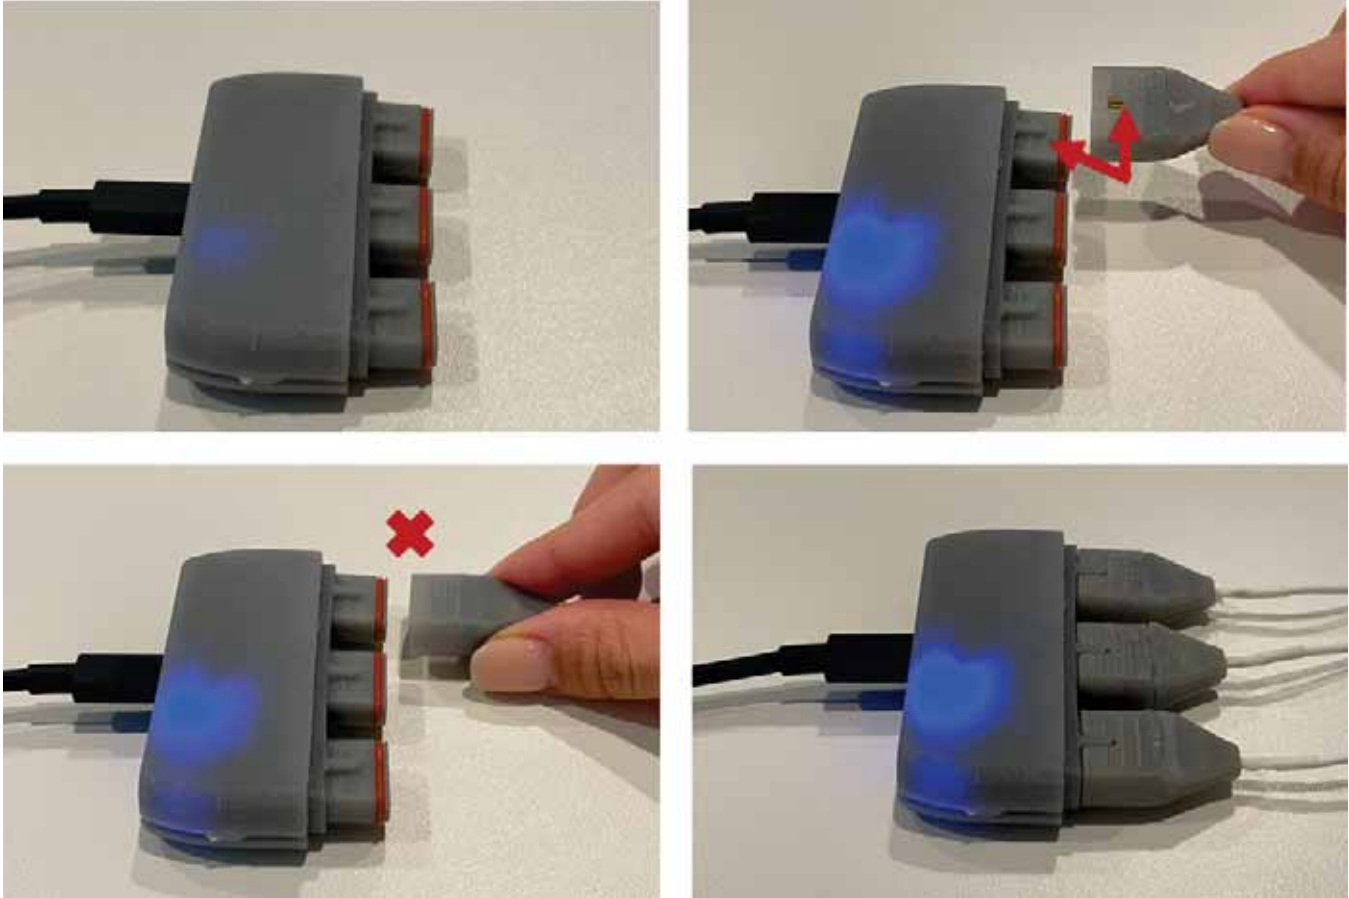


**Note:** Pictures above shows the device with v5002. For devices with v5004 and higher, **LED** will show white when plugged in and in idle mode.

## Legacy Micro SD SIU

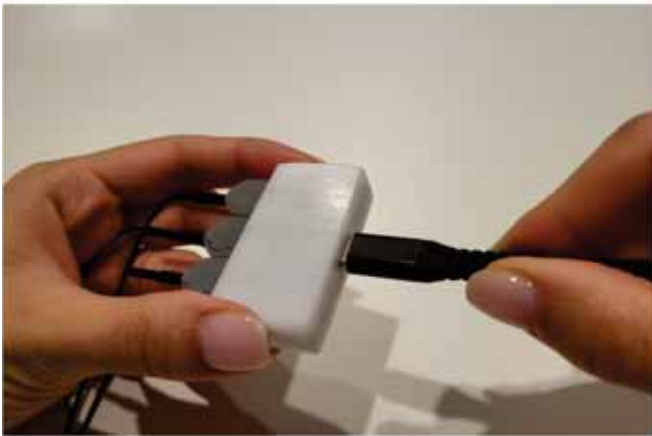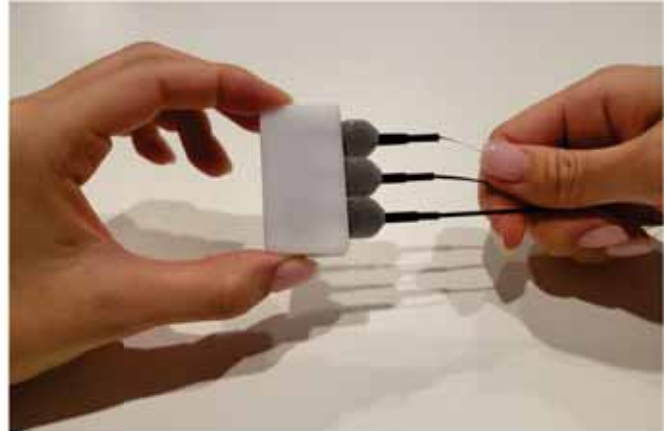

**Note:** If the sensor plug board does not have housing, refer to the picture below to ensure the correct side up

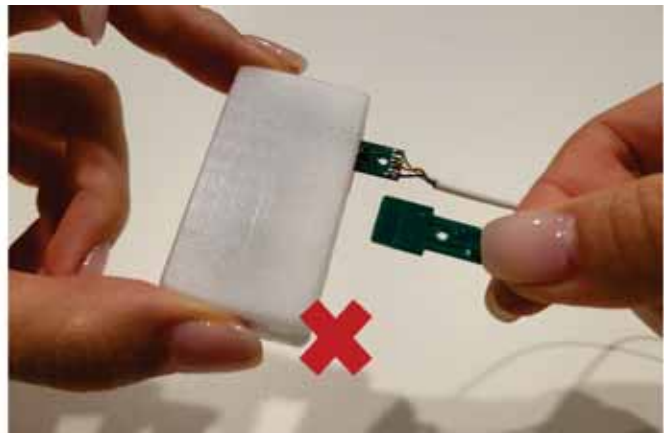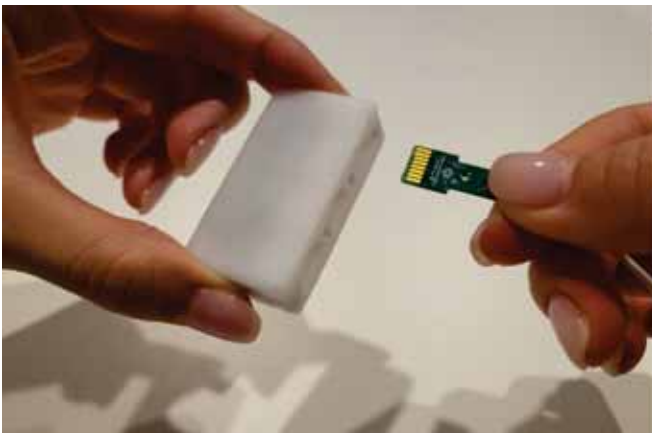

## Mezzanine Connection Sensors + SIU

- Plug **Mezzanine Sensor** into the **SIU**
- Repeat the process to connect multiple sensor devices (refer to the Product Guide for the number of ports supported)






- For **wired connection** to DPU: Plug USB- C into the **SIU** and connect to the **DPU**






- For **wireless connection** to DPU: plug **10631 battery** into the SIU and connect the **10102 Wireless Dongle** to the DPU

**WARNING: Battery can be plugged in both directions but *MUST BE* connected as shown in the top right picture. Plugging in the wrong direction can *DAMAGE* the device.**

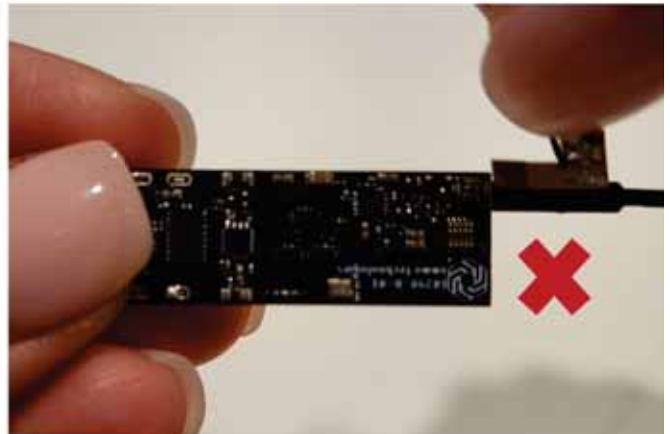
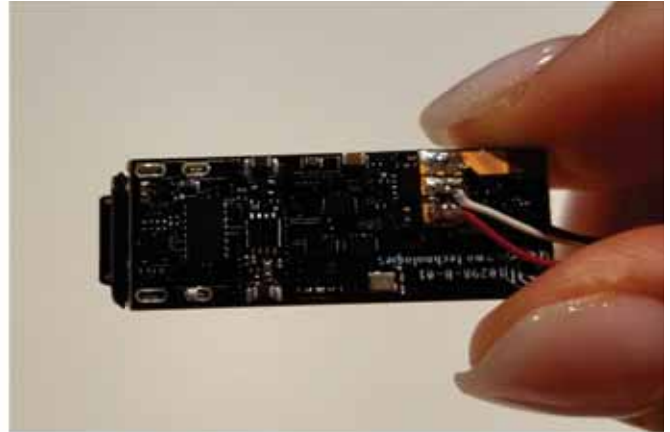
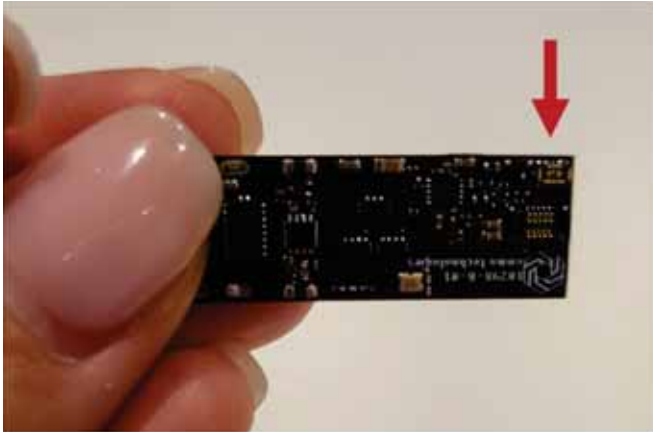


- To **charge the battery**, plug in USB- C while the battery is attached to the **SIU**. Currently, there's no LED behavior for charging the **10631 battery**. LED will remain blue

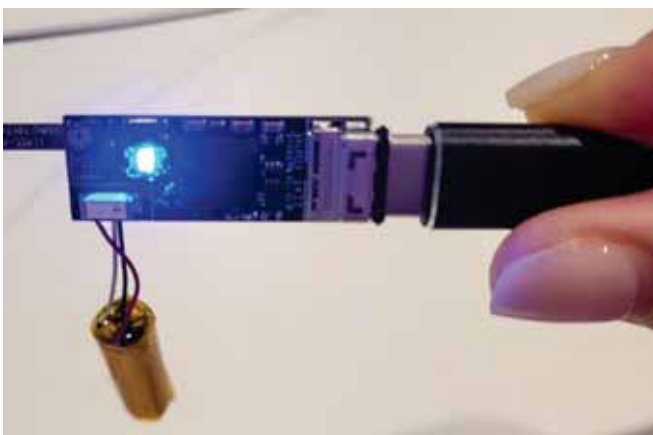


## JST Connection Sensors + SIU (Legacy Product)

- Plug a connection cable into the **JST Fusion Sensor Unit**
- Plug the other end of cable into the **SIU**
- Repeat the process to connect multiple sensors to the SIU (up to 6 sensors)

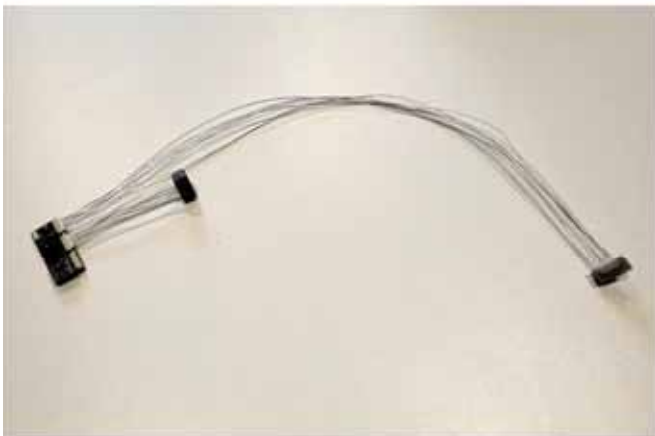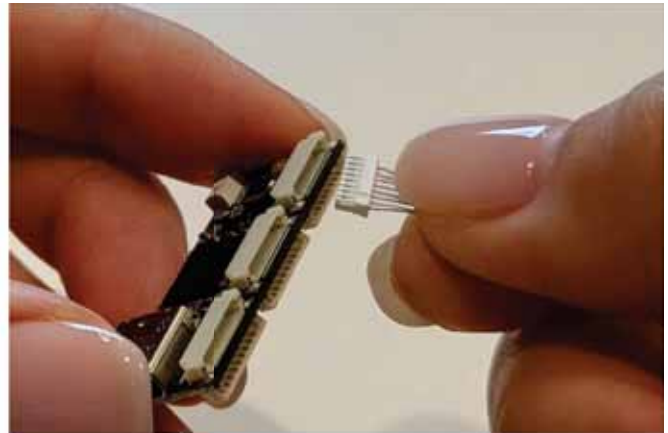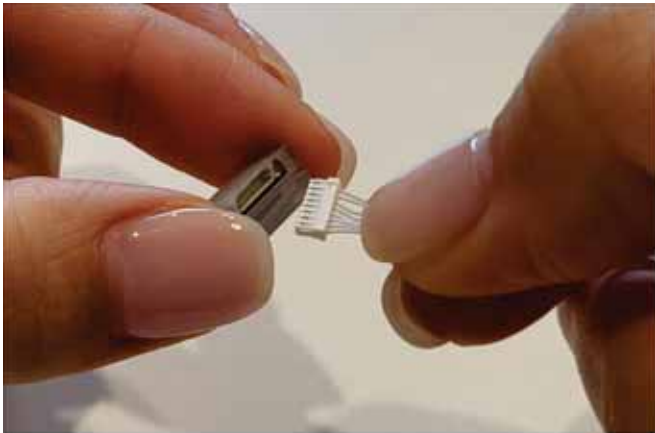


**Note:** Ensure that the header is the correct side up as shown in top right

- For **wired connection** to DPU: plug USB- C into the **SIU** and connect the USB cable to the **DPU**

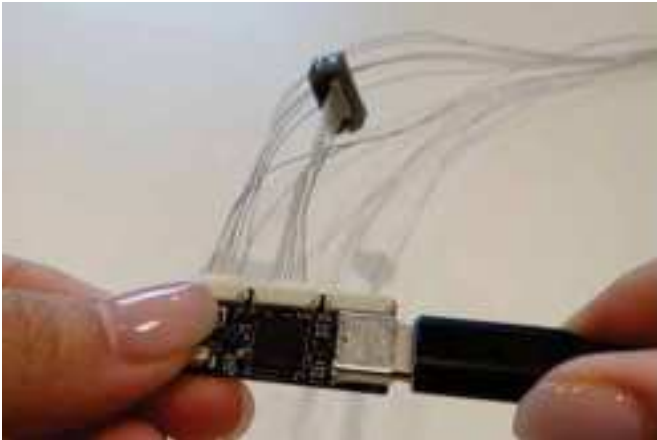


- For **wireless connection** to DPU: plug **10532 battery** into the SIU and connect the **10102 Wireless Dongle** to the **DPU**
- To **turn on** the **SIU**, press on the button shown below. **SIU** will flash blue once turned on. To **turn off** the **SIU**, hold the button and the **LED** will turn off

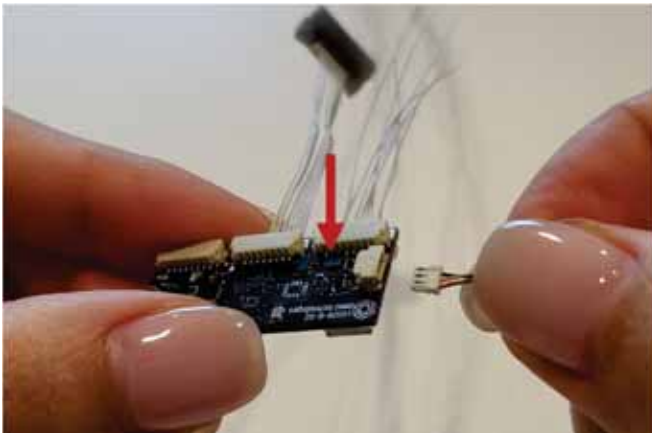




- To **disconnect the cable** from **sensor device** and **SIU**, hold on to all the wires close near the header and gently pull

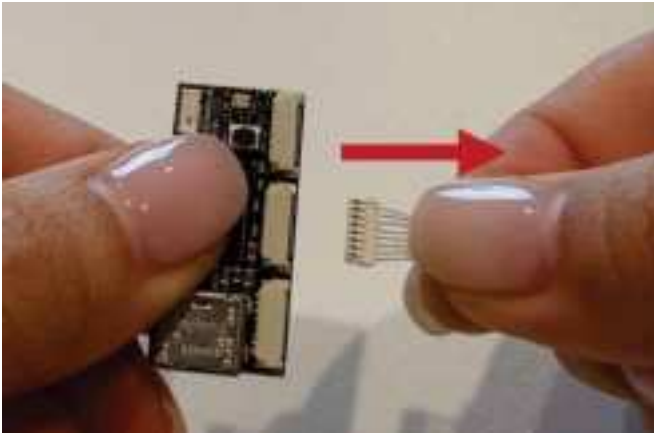


- To **charge the battery**, plug in USB- C while the battery is attached to the **SIU**. Currently, there's no LED behavior for charging the **10532 battery**. LED will remain blue

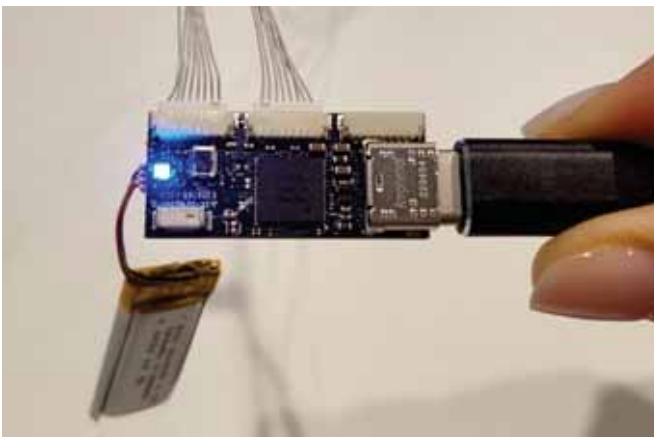


## Mini Wireless

- This device has a built-in SIU and does not require a separate SIU connection
- Insert **10102 Dongle** (Wireless Receiver) to the **DPU**
- To **turn on** the device, press the button located at the bottom of the device. The LED will turn blue

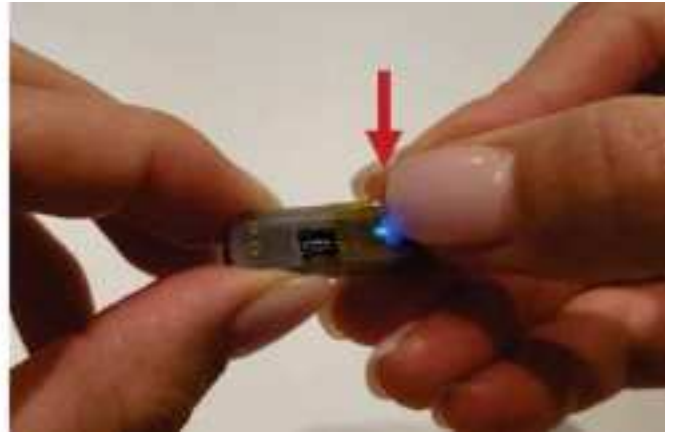


- To **turn off** the device, hold on the button until the light turns off

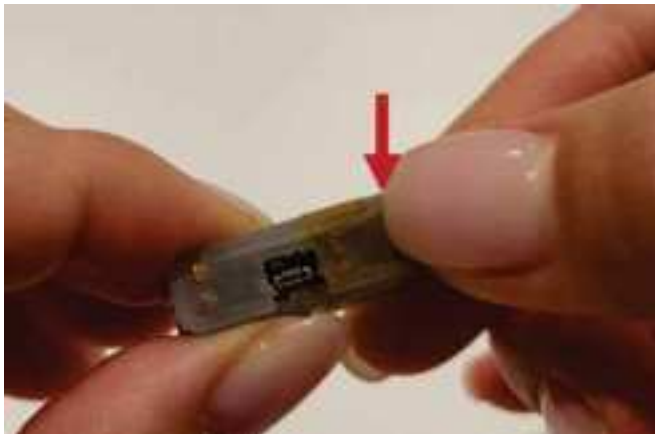

**Note: Pictures above shows the device with v5002. For devices with v5004 and higher, LED will show white when turned on and in idle mode.**

To charge the device, insert the sensor device with the two circle contacts side down into **10474 Mini Wireless Charger**


- Plug in USB- C to the charger and the LED will turn blue. Once charging is complete, LED will turn green

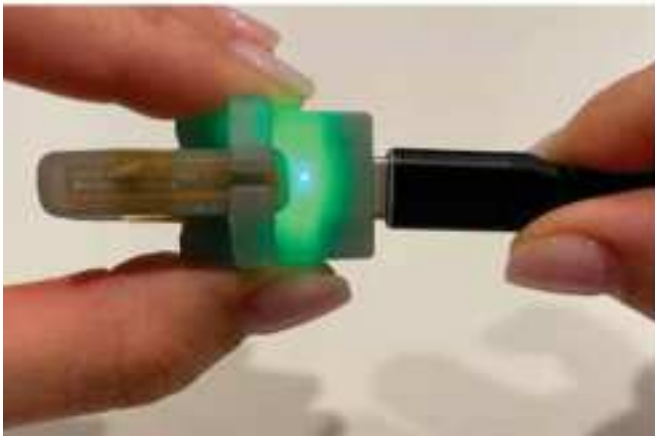

## Troubleshooting/ FAQs

### Q1: How do I check the firm ware version of my hardware?

A: Plug in the hardware devices and open Om mo Firm ware Updater. At the Master Firm ware Updater tab, click “Scan Hardware”. This will show all the connected hardware and their firm ware version. For specific details on how to use this app and update the firm ware, refer to the Firm ware Updater Guide. Note to update the firm ware to v5004 or higher, firm ware\_upder v2.1.10 or higher needs to be used.

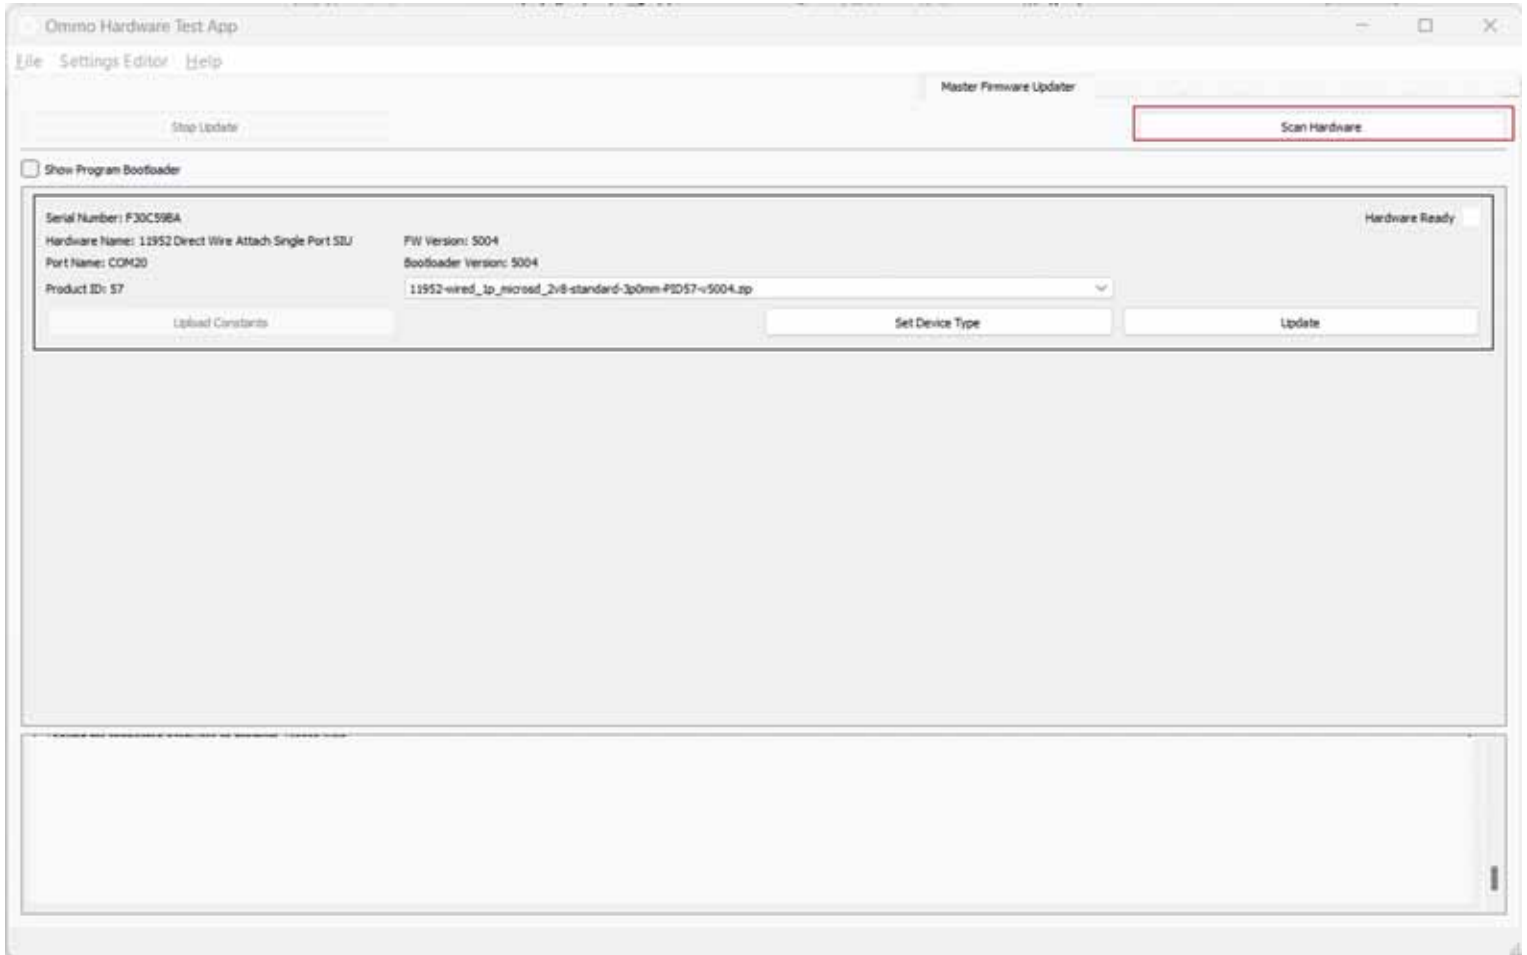

### Q2: My hardware (SIU/ base station) LED is flashing red ( firm ware lower than V5004)/ orange ( firm ware from V5004 and on). What does this mean and what do I do?

A: Make sure your base station is **NOT sitting on ferrous metals** and that the tracking space is free from large ferrous objects.

If the hardware is away from ferrous metals and the LED turned red/orange after starting Ommo Service, unplug and replug the hardware. Restart Ommo Service again and share the crash report with Ommo team for further support.


**Q3: My hardware (SIU/base station) LED is fading green (firmware lower than v5004 only). My base station LED is blue and my SIU is flashing green (firmware from V5004 and on) What does this mean and what do I do?**

A: Base station and SIU are both connected to Ommo App but are not actively sending data. Check to see if a sensor device is attached and present on Ommo App. Base station and SIU LED will turn white (~V5004)/green (V5004~) when they are sending data normally.


**Q4: I connected sensor devices to the SIU but they are not shown on the Ommo App. How do I troubleshoot?**

A: Ommo recommends using Ommo Service UI to understand the details of the error

- Check on the LED color of the base station and SIU. Their behavior is explained in a table here: [Base Station and SIU](#)
- Open up Ommo Service UI and click on the interested connected device
- If there are errors shown, click on "Error Details"

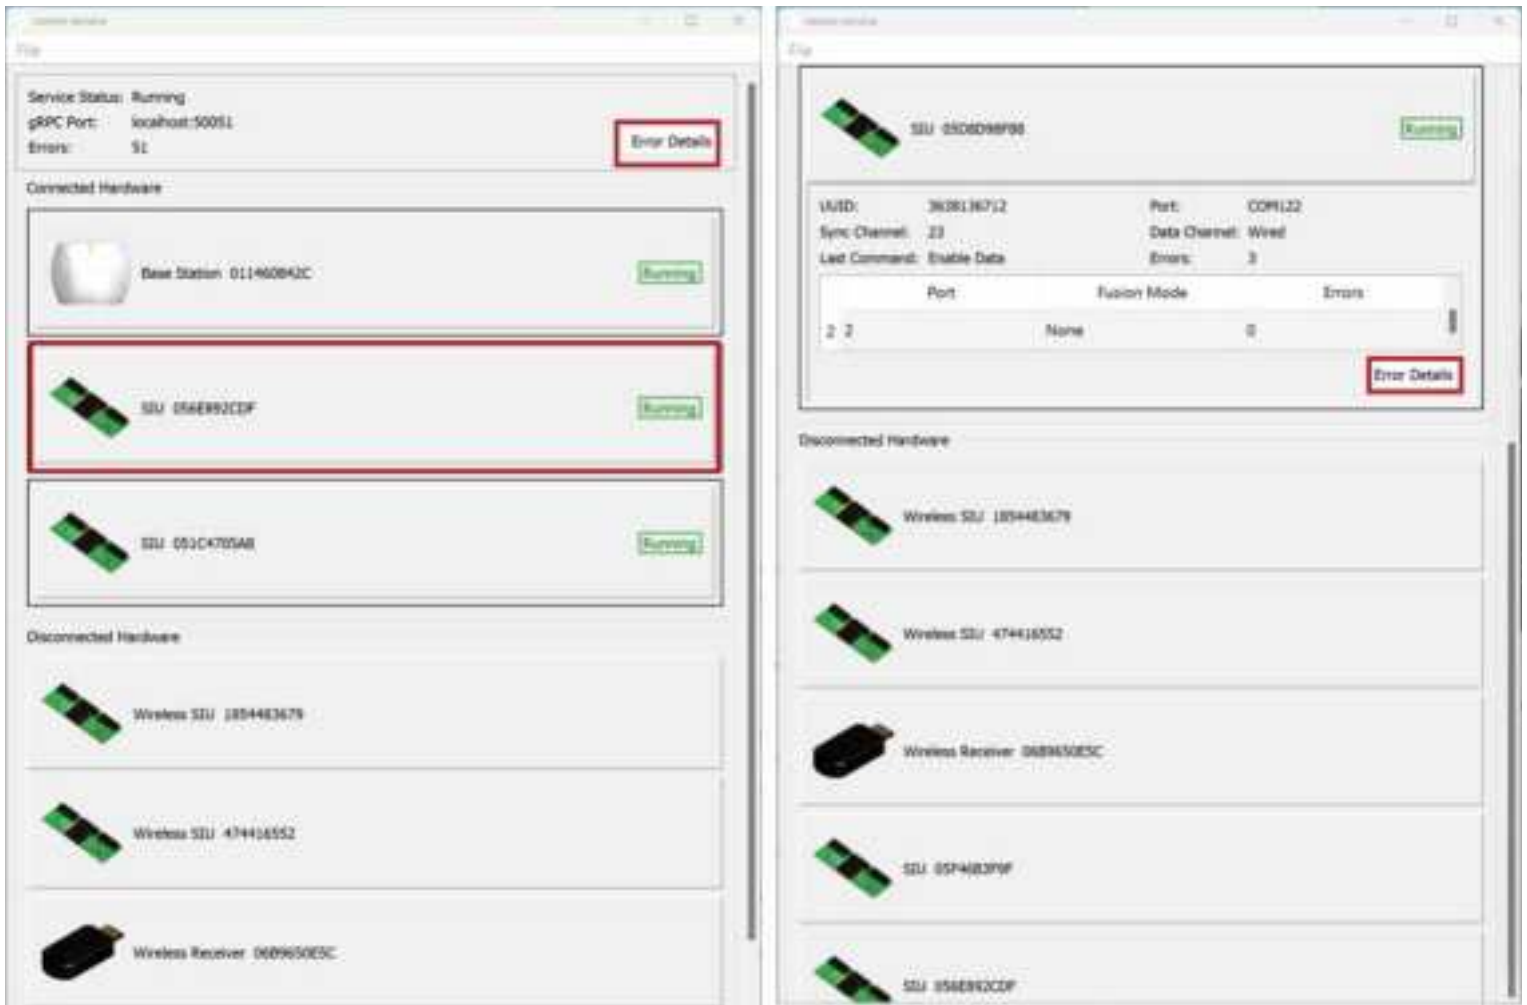


- Error details show the details of the error and when it happened.
- If the following error, “invalid calibration data provided in descriptor” is displayed, your sensor devices need to be re-calibrated/updated. Please contact Om m o team (refer to Q5 below)

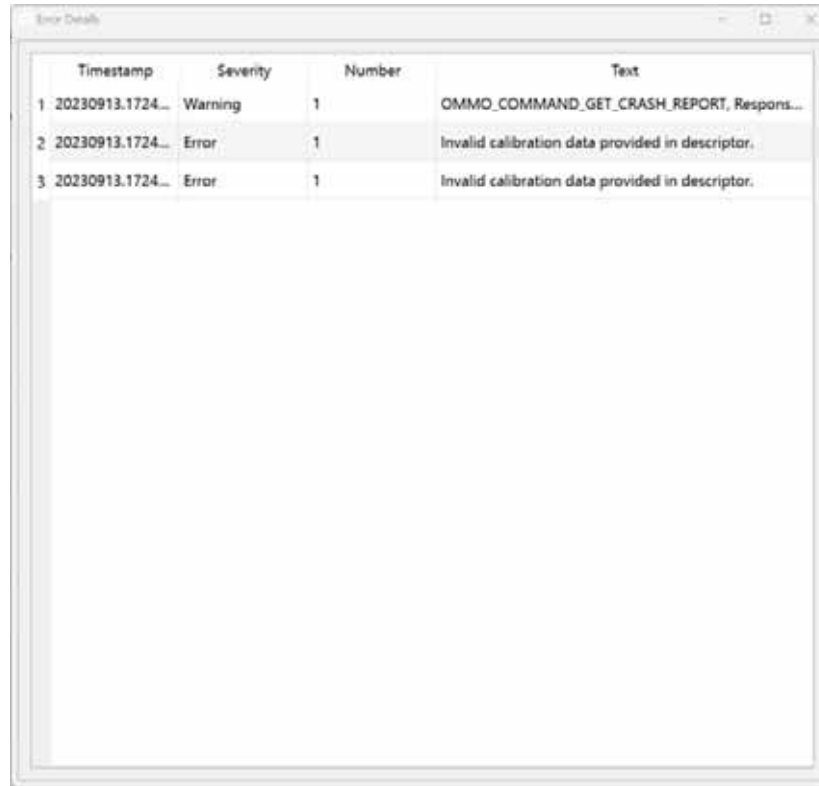


	Timestamp	Severity	Number	Text
1	20230913.1724...	Warning	1	OMMO_COMMAND_GET_CRASH_REPORT, Respons...
2	20230913.1724...	Error	1	Invalid calibration data provided in descriptor.
3	20230913.1724...	Error	1	Invalid calibration data provided in descriptor.

**Q5: My error is not listed in this guide and I need additional help. How do I contact Om mo team for support?**

A: Go to **om mo.co/support** and fill out a ticket. Please share detailed description/picture/videos/ screenshot of the issue you're experiencing (i.e LED behavior, error details on Om mo Service UI, service logs) to help us understand better. You can find the service log text file in the data folder in the om mo service file. (Refer to the 3rd picture below)

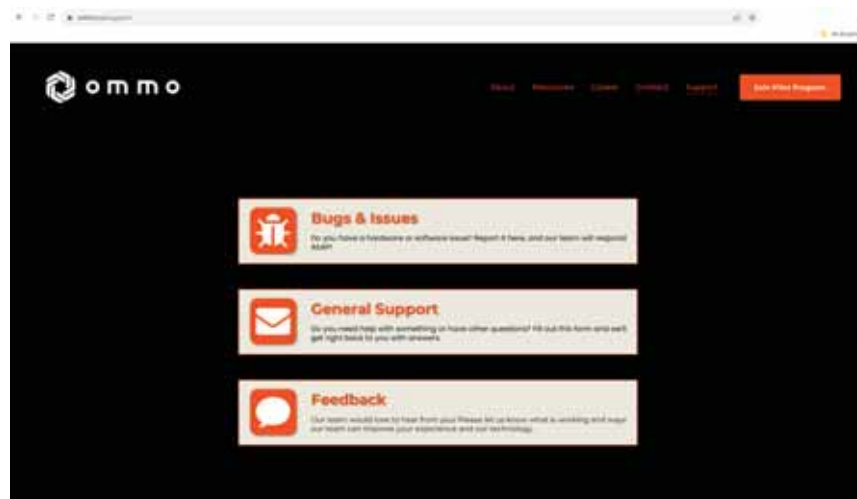

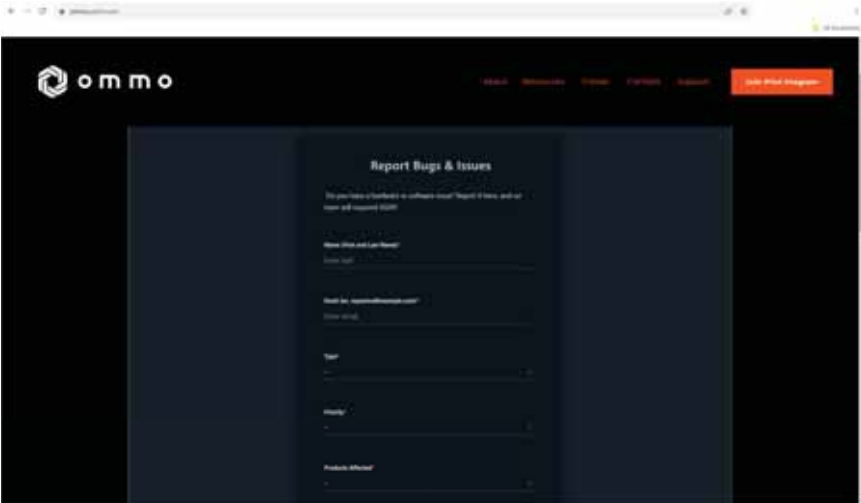

ommo_eval_sdk_v0.16.0 > ommo_eval_sdk_v0.16.0 > ommo_service > data						▼	↺
<input type="checkbox"/>	Name	Status	Date modified	Type	Size		
<input type="checkbox"/>	Hardware	✓	9/21/2023 5:32 PM	JSON File	1 KB		
<input checked="" type="checkbox"/>	log-20230921-173605	✓	9/22/2023 1:52 PM	Text Document	2 KB		
<input type="checkbox"/>	ommo_props	✓	9/21/2023 5:36 PM	JSON File	1 KB		



# Disclaimers/ Legal

The Orbit Base Station and other orbit system components are not medical devices.

## FCC Regulatory Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## RF Exposure Compliance

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.