


Instruction Manual

WARNING


(To reduce the risk of fire, electric shock, or injury to persons):

1. We suggest installation by a licensed electrician.
2. Please read the instructions carefully and save them as you may need them at a later time.
3. Before you start, NEVER attempt any work without shutting off the electricity until the work is done. A) Go to the main fuse or circuit breaker box in your home. Place the main power switch in the "OFF" position. B) Place the wall switch in the "OFF" position.
4. The mounting surface should be clean, dry, flat, strong enough, and 1/4" larger than the canopy on all sides. Any gaps between the mounting surface and the canopy exceeding 3/16" should be corrected as required.
5. Make sure that the ceiling or wall can bear the weight of the lamp before installation.
6. Ensure the voltage you are using is 120V. The maximum wattage is 60W per bulb.
7. Keep the lamp away from acidic objects to avoid damaging the surface of the lamp.
8. When replacing a bulb, turn off or unplug the lamp and wait until it is cool, as bulbs get hot quickly.
9. The safety instructions in this manual do not cover all possible conditions that may occur. It must be understood that common sense, caution, and care must be used with any electrical products.
10. Do not touch the bulb or lamp shade during the lamp's operation.

Image for finished product:

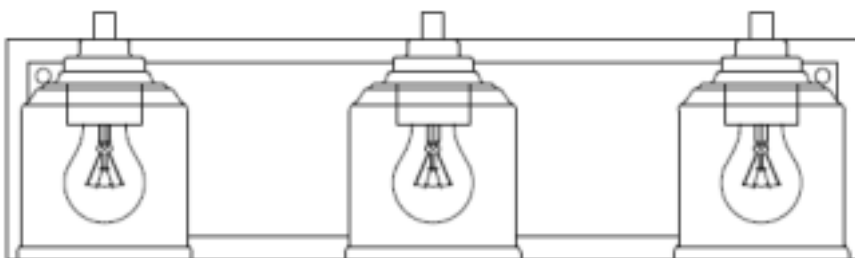

Accessories List:

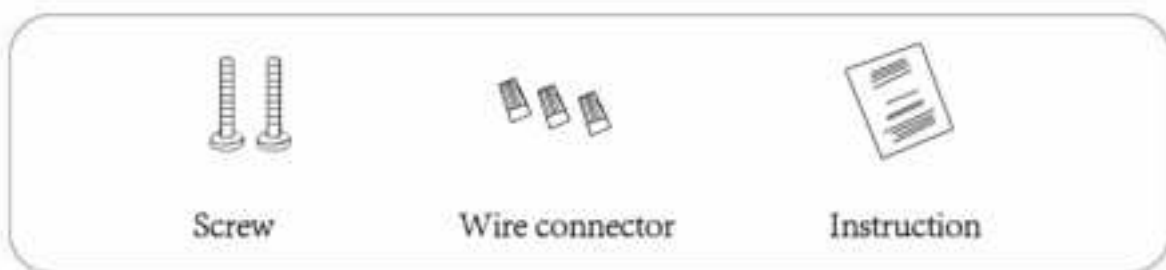



After-sales e-mail: kathy@monightsllc.com
Customer Service Tel ☐ 978-248-8126

Installation Procedures:

First:

A) Open the package and take out all the parts or accessories, then place them on a clean flatplace.

B) Please turn off the power

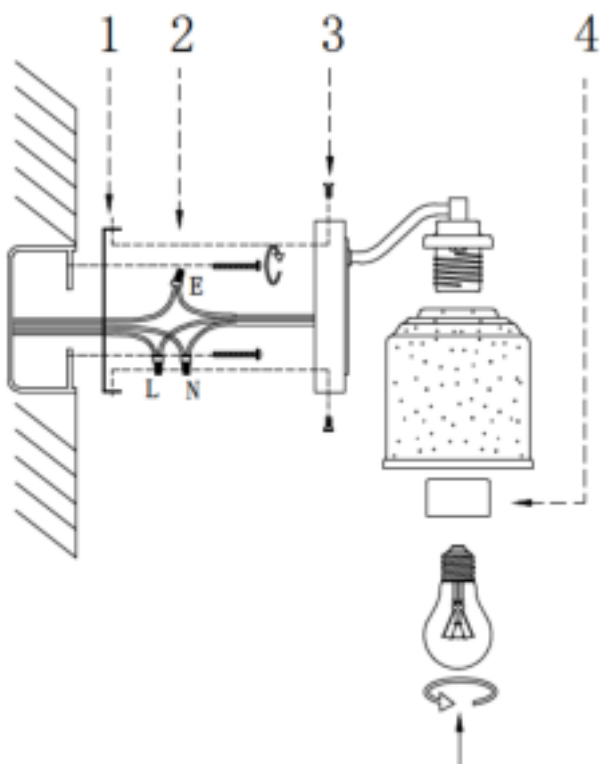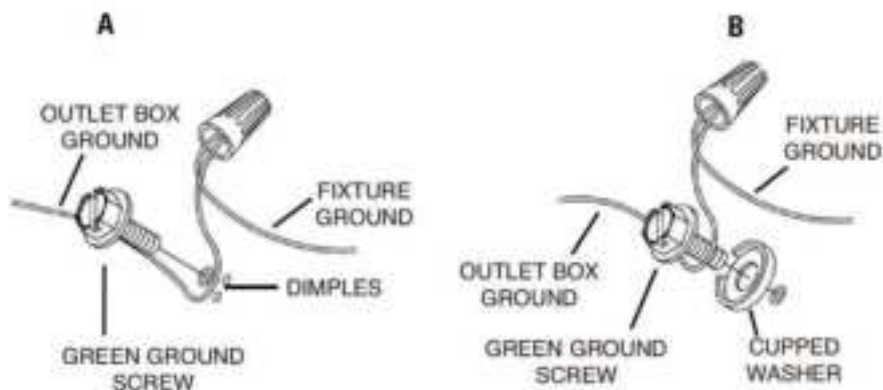

1. Ensure the power is turned off before beginning the installation for safety; Use screws to secure the mounting bracket to the junction box, ensuring it is firmly attached.
2. Connect the power wires to the junction box: L (Live); N (Neutral); E (Earth)
3. Mount the main light fixture onto the bracket and secure it with screws for stability.
4. Tighten the glass shade onto the light fixture with the ring, and install the bulb (E26).

If you need any help, please contact us.

After-sales e-mail: kathy@monightslc.com
Customer Service Tel ☐ 978-248-8126