

RETRACTABLE GARDEN HOSE REEL WITH SPRAY NOZZLE

15, 20 & 30M

CTHSE15RELB, CTHSE20RELB & CTHSE30RELC

SAFETY & WARNINGS

- Read all instructions carefully before use and retain this user guide for future reference.
- Connect only to a water source with pressure at or below 8 bar.
- Release the water pressure when not in use.
- This product contains a charged spring. Do not disassemble the housing.
- Always hold the hose until it completely retracts into the hose reel.
- The yellow tape marks the end of the hose length.
- Release pressure when not in use.
- Do not release the hose allowing to rewind on its own.


COMPONENTS



A User Guide



B Hardware



B1 Screw (x4)



B2 Washer
(x4)



B3 Wall Anchor
(x4)



C Hose Reel



D Mounting
Bracket



E Mounting
Pin




INSTALLATION


Choosing The Best Mounting Location

This product can be mounted in many ways. It is important to select your mounting location carefully. Consider mounting to surfaces that meet the following criteria:

- Near your water source.
 - For the 15m Retractable Garden Hose Reel: This product includes 15m (48ft) of outlet hose. Make sure it can reach your garden.
 - For the 20m Retractable Garden Hose Reel: This product includes 20m (65ft) of outlet hose. Make sure it can reach your garden.
 - For the 30m Retractable Garden Hose Reel: This product includes 30m (100ft) of outlet hose. Make sure it can reach your garden.
- Near your water supply.
 - For the 15m Retractable Garden Hose Reel: This product includes 1.5m (5ft) of inlet hose. Make sure it can reach your water supply.
 - For the 20m Retractable Garden Hose Reel and the 30m Retractable Garden Hose Reel: Both products include 2m (6ft) of inlet hose. Make sure it can reach your water supply.
- Out of direct sunlight.
- Strong enough to support the loads shown to the right (per screw). If unsure, contact a professional installer.
- Refer to the installation options below for more detail.

Load Requirements

	<p>Warning</p> <p>If not properly installed, there is a risk of falling. Make sure your installation can support the loads below.</p>
	<p>Caution</p> <p>When using power tools such as an electric drill, please wear eye protection.</p>
	<p>Warning</p> <p>Ensure there are no live electrical wires or plumbing in the wall at the location you are drilling.</p>

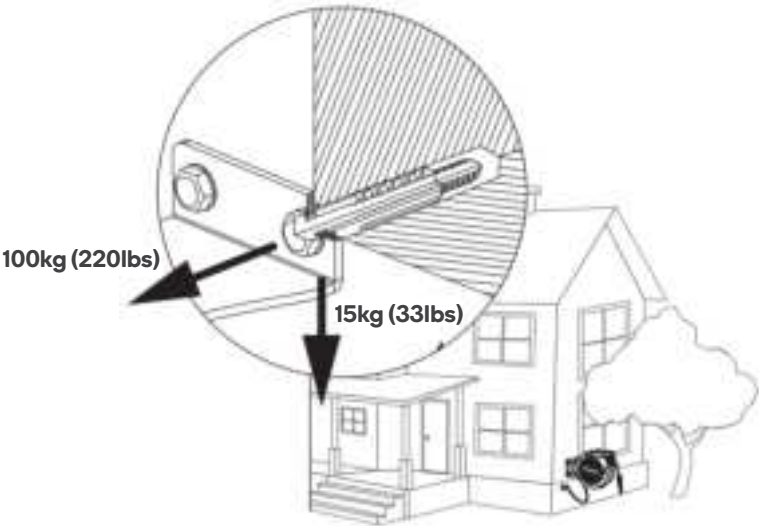

Directly Mount to a Wood Stud


Recommended tools:

- Masking tape.
- Stud-finder.
- Bubble level.
- Electric drill.
- $\Phi 3\text{mm}$ ($\Phi 1/8\text{in}$) drill bit.
- Philips head screwdriver.


Steps:

1. Using stud-finder, locate the stud and mark the location.
2. Tape the drilling template on the wall at a convenient height, making sure the holes are centered on the stud.
3. Check the hole centres with the level to ensure they are aligned.
4. Drill 4 holes with a $\Phi 3\text{mm}$ ($\Phi 1/8\text{in}$) masonry drill bit on the template centres.
5. Fasten the mounting bracket with 4 screws and washers to the wall or timber post.
6. Hang the hose reel on the wall bracket and secure it by inserting the mounting pin.
7. Connect the inlet hose end to the water source.


15m retractable garden hose reel:

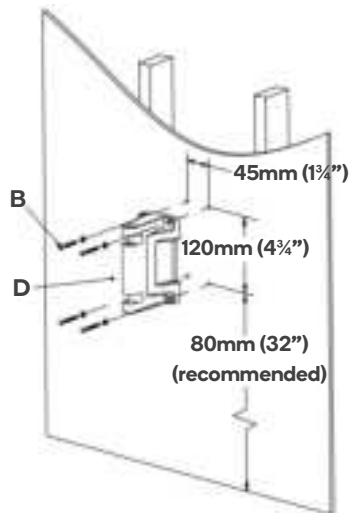

20m retractable garden hose reel:

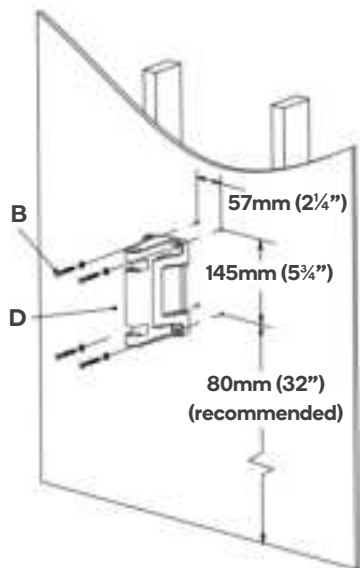

30m retractable garden hose reel:

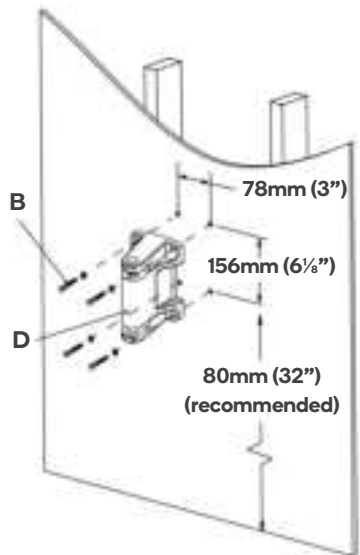


Mount to Hollow Wall and Masonry Wall

Recommended tools:


- Masking tape.
- Bubble level.
- Electric drill.
- $\varnothing 10\text{mm}$ ($\varnothing 3/8\text{in}$) drill bit.
- Hammer or mallet.
- Philips head screwdriver.

Steps:


1. Tape the drilling template on the wall at a convenient height, ensuring the holes are between studs.
2. Check the hole centres with a level to ensure they are aligned.
3. Drill 4 holes with a $\varnothing 10\text{mm}$ ($\varnothing 3/8\text{in}$) masonry drill bit on the template centres.
4. Tap the wall anchors into the holes with a hammer or mallet.
5. Fasten the mounting bracket with 4 screws and washers to the wall or timber post, ensuring to drive the screws into the wall anchors.
6. Hang the hose reel on the wall bracket and secure it by inserting the mounting pin.
7. Connect the inlet hose end to the water source.




15m retractable garden hose reel:

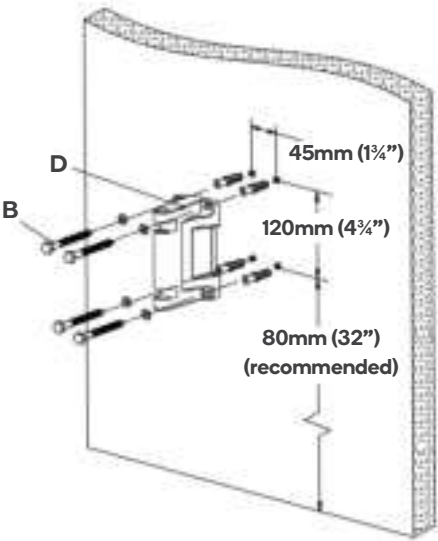

20m retractable garden hose reel:

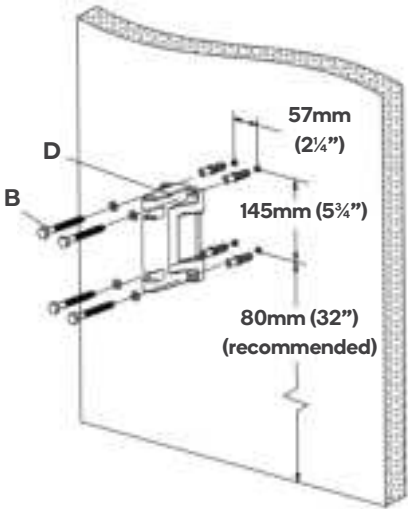

30m retractable garden hose reel:

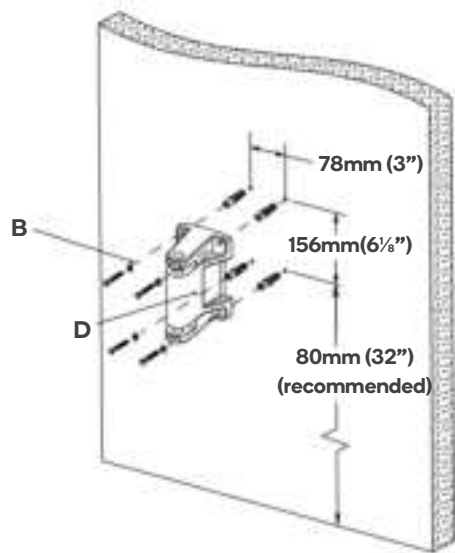

OPERATION

Using the Retractable Garden Hose Reel


1. Pull the hose out to the desired length. The hose will automatically lock in position.
2. To unlock and retract, give the hose a short pull. Walk the hose back to the hose reel. If you pull the hose longer than 10cm you may re-lock the hose.
3. To avoid injury and damage, always hold the hose while it is retracting. The 20m and 30m hose reels have a controlled return function.
4. If the hose becomes tangled and will not retract - slowly pull out the hose past the tangled section and then allow the hose to slowly retract while guiding the hose back into the hose reel. Always ensure the hose is clean and not twisted.



Adjusting the Stop Ball

The stop-ball location can be adjusted to ensure the hose is always within reach. No tools are needed.

1. Pull out the hose to the desired length, ensuring the hose reel is locked (will not rewind).
2. Open the latch on the stop ball and move it to the desired location.
3. Re-latch the ball.

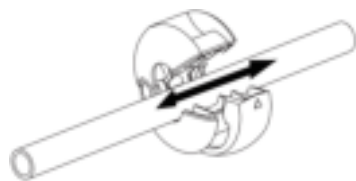

Caution:

Always ensure the hose reel is locked before removing the stop-ball and make sure the stop ball is securely fastened before unlocking the reel.

CLEANING & CARE

- While your product has been made with high quality materials, degradation can occur over time. Inspect the hose and housing periodically. If cracking or blisters are visible, discontinue use.
- **Warning:** This product contains a charged spring. Do not disassemble the housing.
- Always keep the hose clean.
- If the hose becomes dirty, clean it with a damp cloth while retracting.
- Do not twist the hose while in use.
- Mount the hose reel in a sheltered area to assist and protect the performance of the hose and the reel.
- Do not allow the hose to contact any corrosive chemicals or liquids.
- Always retract the hose when not in use.

SPECIFICATIONS

Hose diameter	11mm (1/2 in)
Inlet hose length	1.5m, 2m
Outlet hose length	15m, 20m & 30m
Maximum operating pressure	8 bar

Need more information?

We hope that this user guide has given you the assistance needed for a simple set-up.

For the most up-to-date guide for your product, as well as any additional assistance you may require, head online to **help.kogan.com**

kogan.com