


HYPERLITE

**Rejilla 14
Hexagonal
Garage Lights**



HYPERLITE Rejilla 14 Hexagonal Garage Lights Instruction Manual


[Home](#) » [HYPERLITE](#) » HYPERLITE Rejilla 14 Hexagonal Garage Lights Instruction Manual 

Contents





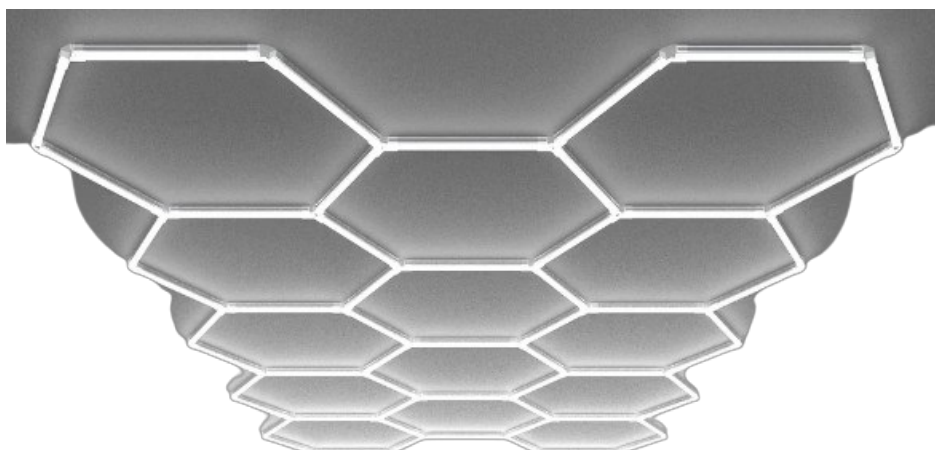



- [1 HYPERLITE Rejilla 14 Hexagonal Garage Lights](#)
- [2 Model](#)
- [3 FEATURES & SPECIFICATIONS](#)
- [4 INSTALLATION](#)
- [5 Contact](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

HYPERLITE

HYPERLITE Rejilla 14 Hexagonal Garage Lights



Model

Model		14 HEX
Picture	QTY	
 7W Tubes	x 58	
 120° V connector	x 18	
 120° Y connector	x 28	
 Power cable	x 1	
 Wire Nuts	x 3	
 Screws	x 49	
 Anchoring	x 49	
 Nylon zip tie	x 61	


Note: The package includes one spare unit for each tube and connector.

FEATURES & SPECIFICATIONS

Performance Data		14 HEX
Physical & Listing	Power	399W
	Input Voltage	100-277V AC
	CCT	6500K
	Mounting	Suspension / Surface mount
	Life span	> 30,000 hours
	Warranty	24 Months

INSTALLATION

- Connect the tubes by series as follows, each red circle requires its own power source.



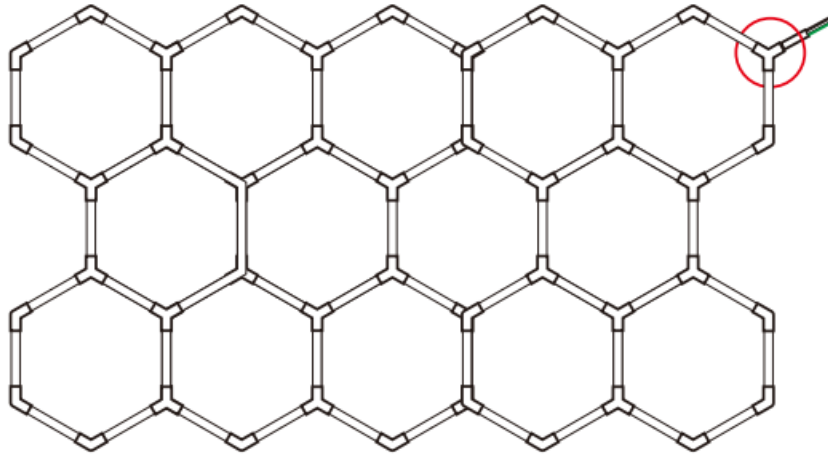


CAUTION!!

1. Please be careful when connecting the light bars with the connectors. Don't damage the copper needle in the connectors.
2. TEST BEFORE INSTALLING TO THE CEILING.
3. Only 1 connector for AC input cord:
 - Printed wire / Black – Line
 - Blank wire / White – Neutral

Installation Instruction


1. Confirm the correct AC input connector
2. Connect the 120° Y connector
3. Connect the 120° V connector

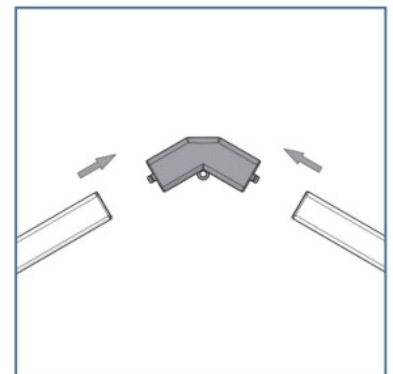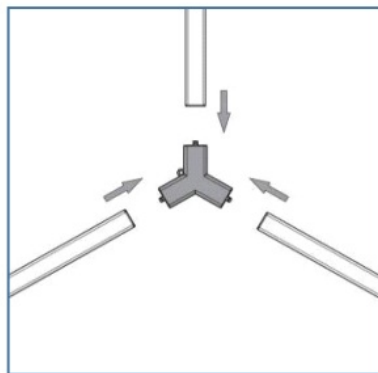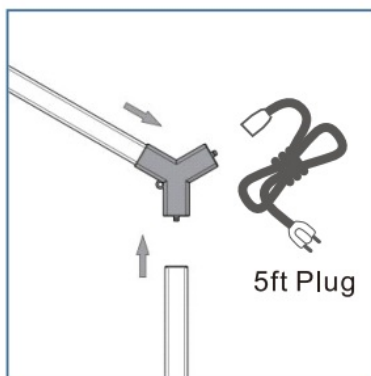


Note: Use one cable per 62 tubes, with a maximum connection of 440W@120V. If you need to use more than 62 tubes, make sure to evenly distribute the input lines. For any questions or assistance, feel free to contact us.

How to install it on the ceiling.

1. Grid roof – Tie it with zip ties

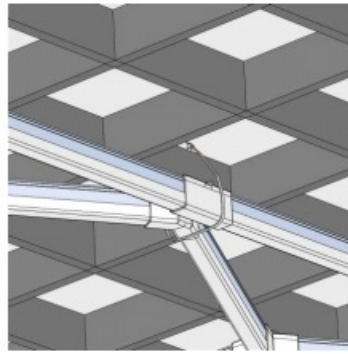**Remarks:**

1. There should be 1 wire out to connect with 120V;
2. Please install by a professional electrician;
2. Flat roof – Screw the connector from the hole to the ceiling directly

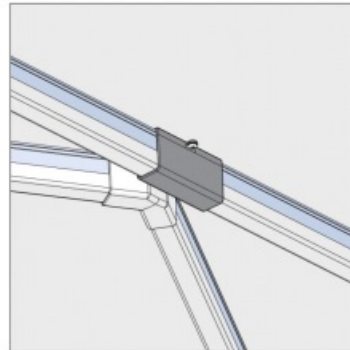**WARNING**

Please do not match the connectors by violence, it would damage the whole set of lamps. If it does not match the lamps well, please try to joint accurately or change the lamp, do not damage the connectors by violence. Test by AVO meter before powering on.

Contact


- Web: www.hi-hyperlite.com
- Email: service@hi-hyperlite.com
- Tel: +1(855) 688 7879

A good & brand new product. Congrats! Enjoy a brighter life now.

Feel free to contact us

- Email: service@hi-hyperlite.com
- Toll-free number: +1(855) 688 7879
- www.hi-hyperlite.com

Documents / Resources

	HYPERLITE Rejilla 14 Hexagonal Garage Lights [pdf] Instruction Manual Rejilla 14 Hexagonal Garage Lights, Rejilla 14, Hexagonal Garage Lights, Garage Lights, Lights
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.