Home » IsYoung » isyoung BF002 Smart Bird Feeder with Camera Instruction Manual

isyoung BF002 Smart Bird Feeder with Camera Instruction **Manual**



Contents

- 1 Smart Al Recognition Bird Feeder
 - 1.1 Product manual
 - **1.1.1 WARM TIPS**
 - 1.1.2 WHAT'S IN THE BOX
 - 1.1.3 SPECIFICATIONS FOR BIRD **FEEDER**
 - 1.1.4 INTRODUCTION FOR BIRD FEEDER
 - 1.1.5 INTRODUCTION FOR CAMERA
 - 1.1.6 INDICATOR LIGHT
 - 1.1.7 HOW TO CONNECT TO THE APP
 - 1.1.8 APP INTERFACE INTRODUCTION
 - 1.1.9 HOW TO INSTALL
 - 1.1.10 HOW TO CHARGE THE CAMERA
- 2 Documents / Resources
 - 2.1 References
- **3 Related Posts**

Smart AI Recognition Bird Feeder


Product manual

Customer Support: service@isyoung.com

WARM TIPS


- 1. Keep the bird feeder and all accessories out of reach of children and pets.
- 2. Make sure the camera has been fully charged for the first time.
- 3. Please do not expose the camera lens to sunlight directly.
- 4. Please do not soak the bird feeder in water.
- 5. Please use 2.4 GHz WI-FI to connect the application.
- 6. Please stay away from the strong light when pairing.
- 7. Please keep the board feeder within the range of WI-FI signal.

WHAT'S IN THE BOX

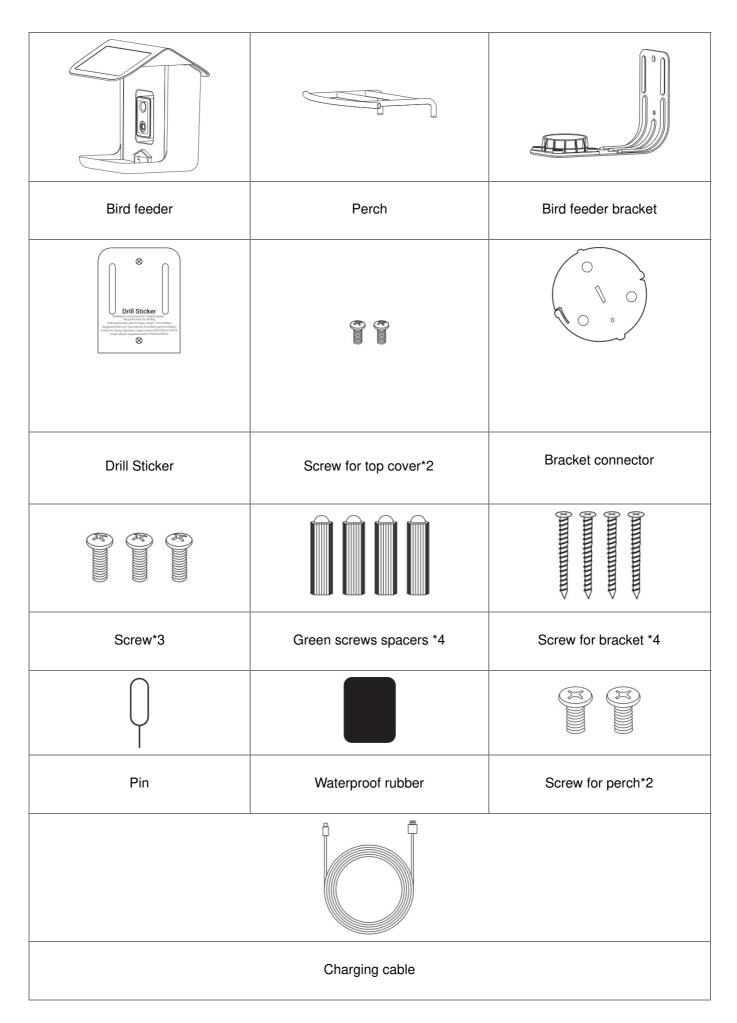


| Product Model | BF002 |
|-----------------------------|---|
| Charging | Solar panel and USB cable |
| Battery | 5200 mAh Rechargeable Lithium-Ion Battery |
| Resolution | 2.0MegaPixels Photos and 1080P HD Live Stream Video |
| Operating Temperature | -5°F to 120°F (-20.5°C to 48.5°C) |
| Wireless Type | WiFi 2.4GHz |
| Field of View | Diagonal: 130°, Horizontal: 94°, Vertical: 40° |
| Dimension | L9.45 x W8.66 x H11.02 inches (24 x 22 x 28 cm) |
| Power Supply | DC 5V2A |
| Power Consumption | 2W(Max.) |
| Battery Life | 4-6 years |
| Night Visual Range | 8m(Max) |
| Anti-flicker | 50HZ/60HZ |
| SOLAR PANEL SPECIFICATION | |
| IPCE | 19% |
| Working Voltage (Vmp) | 5V±5% |
| Working Current (Imp) | 400mA±5% |
| Open Circuit Voltage (VOC) | 7.2V±5% |
| Short-Circuit Current (ISC) | 480mA±5% |
| | |

INTRODUCTION FOR BIRD FEEDER

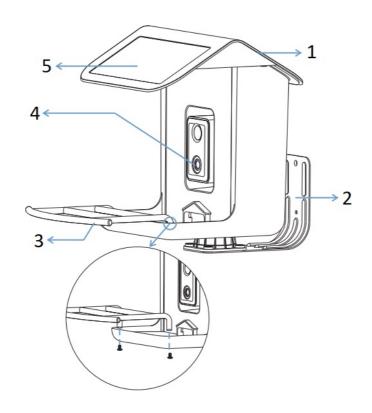


- 1. Bird Feeder Cover
- 2. Bracket
- 3. Perch
- 4. Camera
- 5. Solar Panel

INTRODUCTION FOR CAMERA

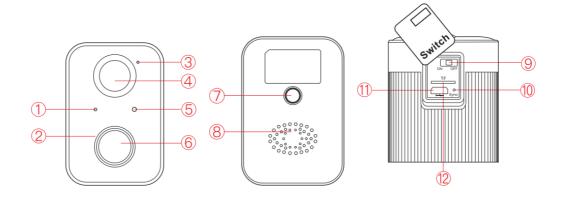

- (1) Indicator Light
- (2) Infrared LED
- (3) Microphone
- (4) Motion sensor
- (5) Light sensor
- (6) Lens
- (7) Mounting hole
- (8) Speaker
- (9) Power ON/OFF
- (10) Sync/Reset
- (11) Charging port
- (12) TF card slot (Capacity expansion 128G)

INDICATOR LIGHT



- 1. Camera turn on: Red light always ON.
- 2. Pairing mode: Red light fast blinking.
- 3. Network connecting: Green light fast blinking.
- 4. Network connected: Green light always ON.

- 5. Abnormal status: Red light slow blinking.(Need to reset)
- 6. During firmware update: Yellow light always ON.
- 7. Charging status: White light always ON during charging and OFF after fully charged.

HOW TO CONNECT TO THE APP









Download or scan the QR code and install the Bird Lover App for either IOS or Android. Once downloaded, the APP will prompt you to register your device. Enter your phone number or email address which one makes you feel comfortable and select the country you live in. You will receive the registration code. Input the registration code, then create a password.


1. Turn on the camera power and you will see the indicator light flashing quickly and hear a sound.

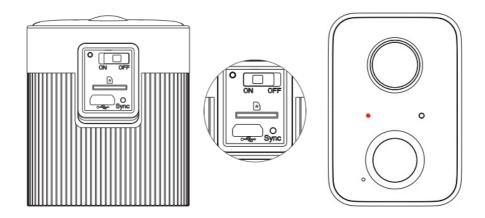

2. Open the App and follow the steps below to start the connection.

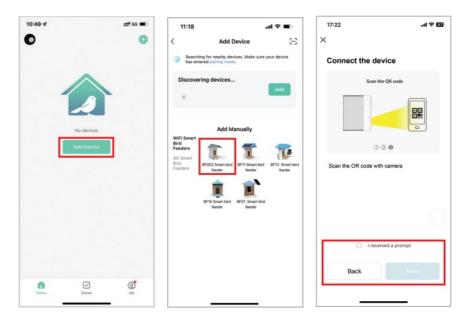


3. You need to enter the right Wi-Fi password for the first-time connection.

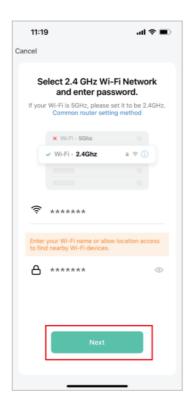

4.Scan the QR code with the camera. You will hear a prompt sound after a successful scanning.






NOTE: The QR code needs to be aimed at the camera below

5. Wait for the connection to complete, then click "Done".





APP INTERFACE INTRODUCTION

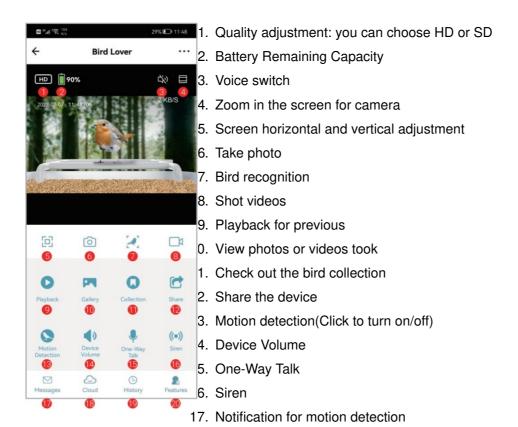

- 18. Cloud storage service
- 19. History for bird recognition
- 20. Back to all function interface

HOW TO INSTALL

1.Stick the sticker on the tree or wall and drill holes within the range marked on the sticker.



2.Insert the green plastic screw spacers into the hole.



3. Fix the bracket with long screws.





4.Install the bird feeder and align the three holes underneath.



5.Fix bird feeder with three short screws.



6.Install the perch with the two screws in the package.



7. The bird house can rotate left and right.



HOW TO CHARGE THE CAMERA

- (1) Rotate the camera down.
- (2) Connect the solar charging cable.
- (3) Or remove the camera and charge it with the charging cable.



Documents / Resources



isyoung BF002 Smart Bird Feeder with Camera [pdf] Instruction Manual BF002, BF002 Smart Bird Feeder with Camera, Smart Bird Feeder with Camera, Bird Feeder with Camera, Feeder with Camera, Camera

References

• User Manual

Manuals+,